

2x2FT



2x4FT



## PERFORMANCE FEATURES

### UL Listing

Suitable for damp locations

### Lifespan:

Lumen Maintenance, L70 > 54,000 hours  
 Rated Life: 100,000 hours

### Optional Accessories

- Surface mount kit | Drywall mount kit
- Suspension mount kit
- Occupancy sensor
- EM battery

### LEDs:

Long-life, high-efficacy, micro-power LEDs

### Finish

Long lasting white finish with high durability

### Flicker:

Produces no greater than 30 percent flicker at 200 Hz or below when paired with control devices per CEC Title 24

### Housing

Cold-rolled steel  
 And Frosted PMMA lens

### Mounting

- Grid ceiling • Recessed drywall
- Surface mounting • Suspended installation

### Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. The dim-to-off voltage threshold of optional 12V AUX integrated driver ranges from 0.1V to 0.5V.


## SKU GUIDE

Model Section		TRO4-45W-CCT-DV2-F-WHSM-2						
TRO4		45W	CCT	DV2		F	WHSM	
BODY TYPE PREFIX	MODEL NAME	WATTAGE	CCT (if selectable = CCT)	DRIVER	VOLTAGE	ELECTRICAL OPTIC/LENS	HOUSING FINISH	MOUNTING
TRO	2 - 2X2 FT 4 - 2X4 FT	35W - 25/30/35 45W - 34/38/45	CCT - 3500K/ 4000K/5000K (3-Way CCT Selectable)	D - 0-10V Dimming	V2 - 120-277V (Universal Voltage)	F-Frosted Lens	WH-White Finish	SM-Surface Mount

## SKU SPECIFICATION

SKU #	Nominal Wattage	CCT	Lumens	Efficacy (LPW)	CRI	Input Voltage	Operating Temp.	Certifications	Avail Options
TRO2-35W-CCT-DV2 -NA-F-WHSM-2	35/30/25	3500K/ 4000K/ 5000K	4375/ 3750/ 3125	125	>80	120-277V	-4(Degree) F/ -20(Degree)C to 122(Degree) F/ -50(Degree) C	UL listed DLC listed	Occupancy sensor, EM battery
TRO4-45W-CCT-DV2 -F-WHSM-2	45/38/34	3500K/ 4000K/ 5000K	5625/ 4750/ 4250	125	>80	120-277V	-4(Degree) F/ -20(Degree)C to 122(Degree) F/ -50(Degree) C	UL listed DLC listed	Occupancy sensor, EM battery


## PRODUCT DIMENSIONS

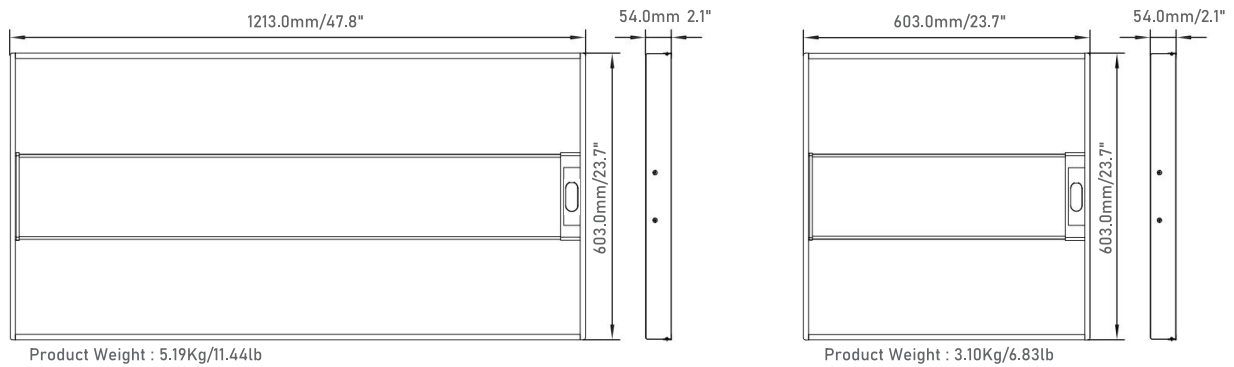

## PACKAGING DIMENSIONS

SKU #	Standard Pack	Dimension
TRO2-35W-CCT-DV2-NA-F-WHSM-2	2 Pack	L 22.7 in x W 22.7in x H 10.1in
TRO4-45W-CCT-DV2-NA-F-WHSM-2	2 Pack	L 49.7 in x W 24.7in x H 10.3in

## PHOTOMETRICS

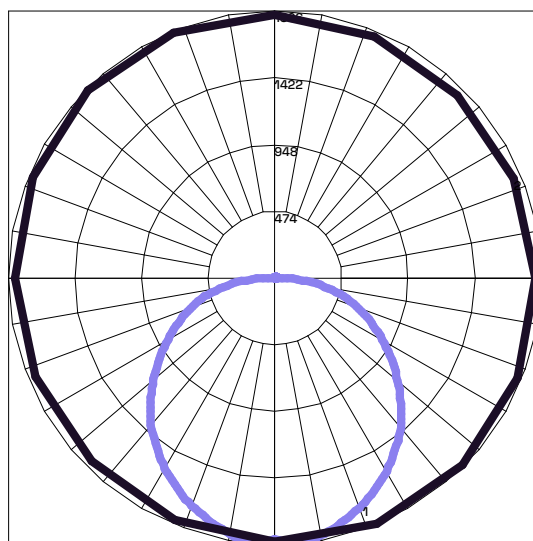

Maximum Candela = 1896.2 Located At Horizontal Angle = 292.5, Vertical Angle = 5  
 # 1 - Vertical Plane Through Horizontal Angles (292.5 - 112.5) (Through Max. Cd.)  
 # 2 - Horizontal Cone Through Vertical Angle (5) (Through Max. Cd.)

**Medinah Power**

**Contact us:** For support & assistance, please feel free to contact us below.

E-Mail: [info@medinahpower.com](mailto:info@medinahpower.com) | Web: [www.medinahpower.com](http://www.medinahpower.com) | Ph: +1 (844) 870-5337

