

DAMP LOCATIONS



PERFORMANCE FEATURES

CETLUS Rated

Suitable for Damp locations

5 Color Temperature Selectable

2700K - 5000K

Energy Star Rated

Dimming

Seamless and smooth dimming capabilities from 10% to 100% that fit any mood or decor

Installation Methods

Surface Mount & E26 Retrofit Can Installation

Application

Living Room, Bedrooms, Kitchen, Hallway, Basement and offices.


SKU GUIDE

Model Section		GDLR4-9W-CCT-DV1-F-WH					
GDLR4		9W	CCT	DV1		F	WH
BODY TYPE PREFIX	MODEL NAME	WATTAGE	CCT (if selectable = CCT)	DRIVER	VOLTAGE	ELECTRICAL OPTIC/LENS	HOUSING FINISH
GDLR	4 - 4 inch 6 - 6 inch	9W 12W	CCT - 5 CCT Selectable (2700K-5000K)	D - Triac Dimming	V1 - 120	F-Frosted Lens	WH- White Finish

SKU SPECIFICATION

SKU #	Nominal Wattage	CCT	Lumens	Efficacy (LPW)	CRI	Input Voltage	Operating Temp.	Certifications
GDLR4-9W-CCT-DV1-NA-F-WH	9W	2700K 3000K 3500K 4000K 5000K	700	78	>80	120	TBD	CETLUS Rated, Energy Star, IC Rated
GDLR6-12W-CCT-DV1-NA-F-WH	12W	2700K 3000K 3500K 4000K 5000K	1000	83	>80	120	TBD	CETLUS Rated, Energy Star, IC Rated



PRODUCT DIMENSIONS

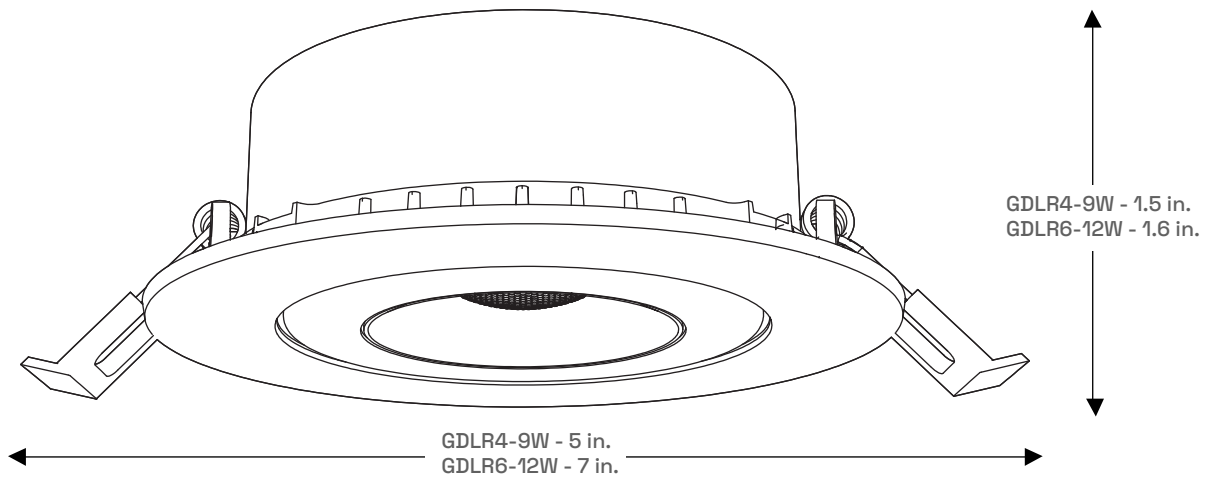

PACKAGING DIMENSIONS

SKU #	Standard Pack	Dimension	Master Pack	W/D
GDLR4-9W-CCT-DV1-NA-F-WH	1 Pack	L 5.1in x W 3.1in x H 5.1in	40 Pack	L 21.4 in x W 16.5in x H 11.2in
GDLR6-12W-CCT-DV1-NA-F-WH	1 Pack	L 7.2 in x W 3.3in x H 7.3in	30 Pack	L 22.2 in x W 11.6in x H 15.3in

INSTALLATION

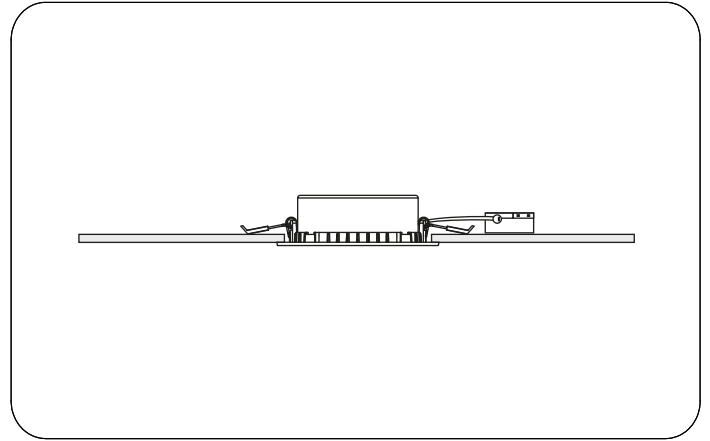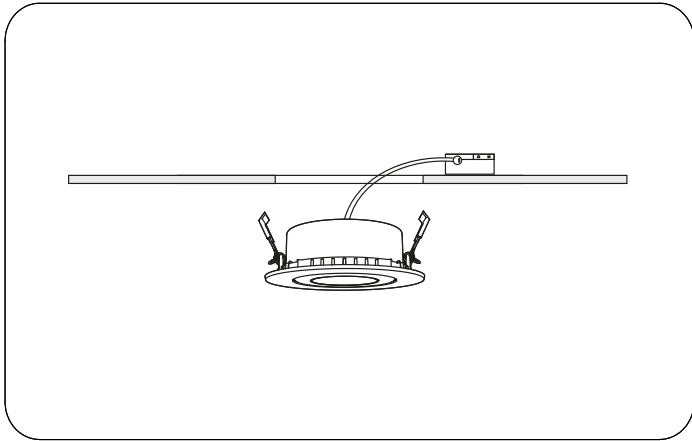

Medinah Power

Contact us: For support & assistance, please feel free to contact us below.

E-Mail: info@medinahpower.com | Web: www.medinahpower.com | Ph: +1 (844) 870-5337

