




SINGLE-USE, FRAC-PLUG SETTING TOOLS

DISPOSABLE TOOLS ELIMINATE WELLSITE REDRESSING ERRORS

The PurpleSet single-use, disposable setting tools are patented disposable setting tools manufactured by Repeat Precision.

Just remove the assembly from the shipping carton, install a frac plug using a Baker 10 or Baker 20 adapter kit (provided by the plug vendor), and insert a power charge.* After the tool strokes to set the plug, it automatically releases pressure before it is retrieved. At the surface, simply remove the setting tool from the running string and set it aside for recycling. No disassembly, no inspection, no redressing. The adapter kit is reused at operator's discretion.

The PurpleSet setting tools are designed to set frac plugs only and are not to be used to set packers or cast iron bridge plugs.

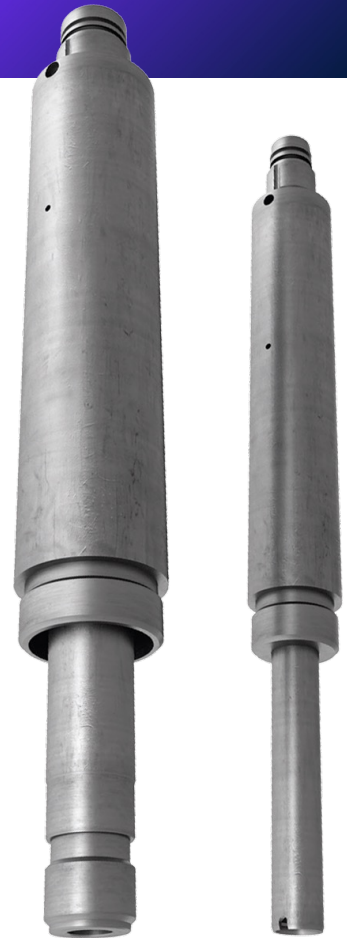

FEATURES & BENEFITS

- No wellsite redressing errors
- No pressure discharge at surface
- 2,669 daN of anti-preset protection built into the setting tool
- Two bleed ports are protected by threaded nylon screws
- The compact, lightweight tools can be handled by one person
- The short length allows additional guns for each stage

SPECIFICATIONS

****Max Set Force, daN**

Setting Tool	Casing Size mm.	Used with 110.3 MPa rated firing head	Used with 137.9 MPa rated firing head	Used with 151.7 MPa rated firing head	Outside Diameter mm.	Length mm.	Stroke mm.	Assembly Weight kg	Part Number
RP10	114.3	8,896	12,010	13,345	69.9	667.5	134.6	11.3	24851
RP20*	127	13,345	22,241	24,465	96.8	696.2	134.6	24.9	24842
RP20	139.7	24,465	24,465	24,465	96.8	757.2	165.1	26.8	42551

*Phasing out

**Contact a Repeat Precision representative for assistance. The max setting force in some cases is limited by the pressure rating of the gun system (firing head).

Matt Merron
Product Line Manager
972.623.7846

Ian Ansley
Houston Area
713.591.8464

Gilbert Rodriguez
Permian Region
432.853.6637

Adam Curry
Appalachia Region
724.882.9816

Todd Draeger
Rocky Mountains Region
970.380.8633

**FIND OUT MORE AT
REPEATPRECISION.COM**