

# CB24

Safe working load 45 tonnes




## Bridge Specifications

The CB24 is a construction vehicle bridge designed to take a safe working load of up to 45 tonnes. It is quick to install and has an exceptional live load / dead weight ratio reducing crane cost. The bridge will arrive on one articulated trailer in sections which are put together to make two 'planks'. Once assembled each 'plank' is then lifted into the final position.

## Data

Overall width (not seperated)	3.7m
Internal width (not seperated)	3.2m
Width of each unit	1.85m
Minimum bank support	1m
Weight of each unit	8 tonnes

## Dimensions

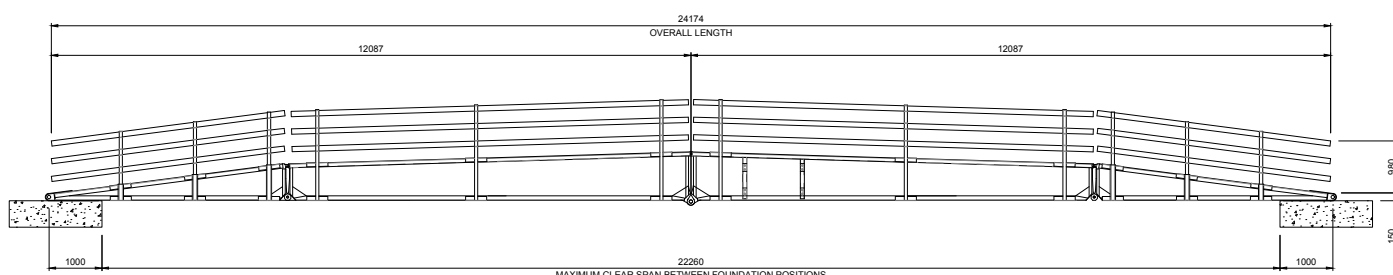

NOTES:  
A RAMP OR STEP OF 150mm FROM TOP OF FOUNDATION TO BRIDGE DECK SURFACE IS TO BE ACHIEVED.  
FOUNDATIONS DRAWN ARE FOR ILLUSTRATIVE PURPOSES ONLY. FOUNDATION SOLUTION TO BE DESIGNED AND INSTALLED BY OTHERS.




01962 885040

[enquiries@mitchellbridges.com](mailto:enquiries@mitchellbridges.com)

[www.mitchellbridges.com](http://www.mitchellbridges.com)

# CB24

## Dimensions

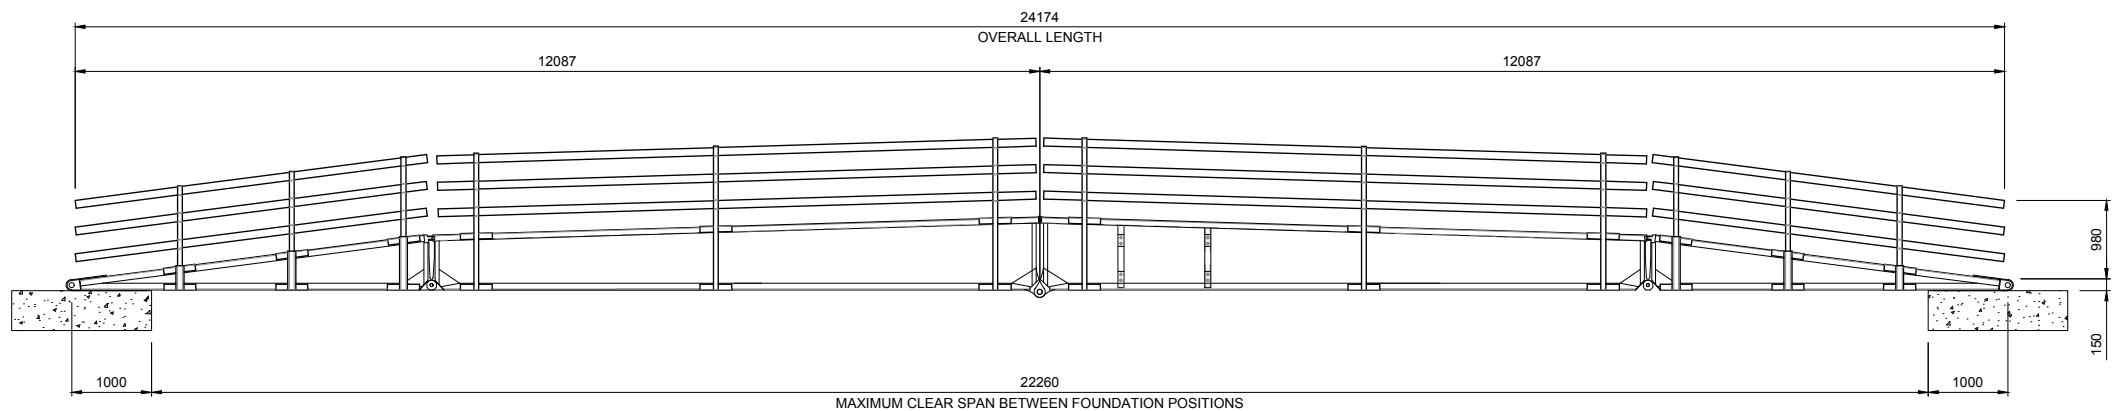

NOTES:  
A RAMP OR STEP OF 150mm FROM TOP OF FOUNDATION TO BRIDGE DECK SURFACE IS TO BE ACHIEVED.  
FOUNDATIONS DRAWN ARE FOR ILLUSTRATIVE PURPOSES ONLY. FOUNDATION SOLUTION TO BE DESIGNED  
AND INSTALLED BY OTHERS.

