



**14K Low-Profile**  
(shown with optional equipment)

# 14K GVW BUMPER-PULL LOW-PROFILE EQUIPMENT TRAILER

GREATER PAYLOAD THAN A STEEL TRAILER

## Exceptionally strong and lightweight with a low profile

The 14K Low-Profile is a heavy-duty yet lightweight trailer ideal for handling tall loads. Constructed of fuel-efficient, low-maintenance aluminum, the 14K Low-Profile flatbed is engineered to perform and built to last. Make it your own by equipping your trailer with a wide variety of popular options including 8k axles with electric brakes, lockable toolbox, spare tire, winch, multiple ramp options and more!

### The Benefits of Aluminum Far Outweigh Steel:

- Lower trailer weight
- Higher payload capacity
- Improved fuel economy
- Reduced maintenance costs

**800-292-4752 • [www.mheby.com](http://www.mheby.com)**




# 14K GVW Bumper-Pull Low-Profile Equipment Trailer

## Features



High-strength aluminum ramps are much lighter and easier to reposition than steel ramps

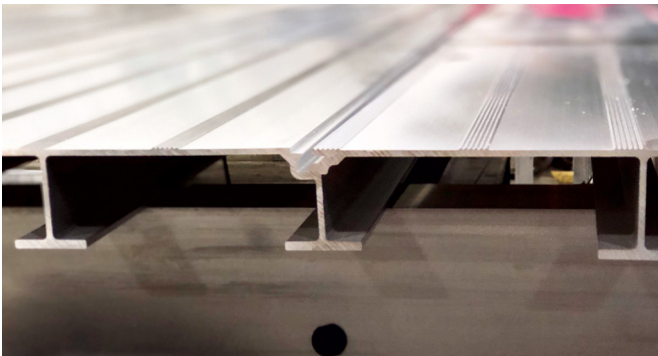

Extruded aluminum floor reduces weight and lasts longer



Aluminum wheels with two 7K Dexter torsion ride axles

Additional options and custom sizes available.  
Contact your Eby representative for details.



800-292-4752  
www.mheby.com



©2023 M. H. Eby, Inc. All rights reserved. Eby reserves the right to change specifications without notice.



EBY is a proud member of The National Association of Trailer Manufacturers, dedicated to improving trailer safety and performance. EBY trailers are manufactured in compliance with NATM guidelines.


## STANDARD SPECIFICATIONS

GVWR	14,000 lbs
Tare Weights	18' 6" – 2,220 lbs; 20' – 2,310 lbs; 24'6" – 2,410 lbs
Deck Lengths	18' 6", 20' and 24'6" (including beavertail)
Deck Width	82" (86 1/4" including pockets and rub rail)
Floor	2 1/4" Height extruded aluminum plank; 82" between fenders
Beavertail	27"; 4 1/2" drop
Fenders	Permanent formed heavy-duty
Frame	10" Channel
Axles	7K Dexter torsion ride
Wheels	16" Aluminum
Tires	235/80R16
Coupler	2 5/16" Adjustable 15K ball coupler
Stake Pockets	2" x 4" Stake pockets in front and behind fenders with rub rail
Ramps	60" L x 16" W fold-up ramps (tube frame with angle cross members). Ramps are pinned in the upright position with aluminum bars; positions are adjustable for various track widths
Tie Downs	(4) D-rings
Landing Leg	12K Side crank with drop-leg
Lighting	LED oval stop/tail/turn lights, 1" round LED clearance and marker lights
Electrical	7-Pin RV plug; breakaway kit

## Available Options



Spare tire



Toolbox



Winch

## Ramp Options



36" wide



Bi-fold

AUTHORIZED DEALER



All Eby trailers feature Dexter axles.

Rev. 10/23