



Part Number	Compatible with
MA-00-S-MC-000-SW	Vivid Contour Series
MA-01-S-MC-000-SW	160, 270, Wave, Wave Mini & Basic


Note:
Applicable to aluminum channels with silicone grip profile.
2 sets of stainless steel wires are offered to pair with 1 piece of 1m mounting channel.
3 sets of stainless steel wires are offered to pair with 1 piece of 2m mounting channel.

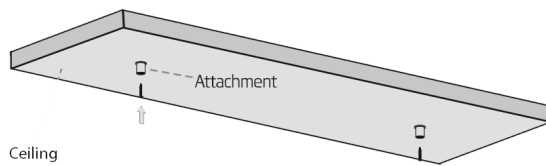


Mount the female cable coupler attachment piece to the ceiling using the Countersunk Self-tapping Screws. Be aware of placement for sufficient load-carrying capacity.

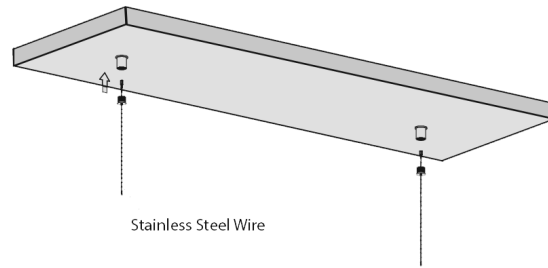


Thread the stainless steel wire through the male cable coupler. Then screw the male cable coupler to the female cable coupler attachment piece.

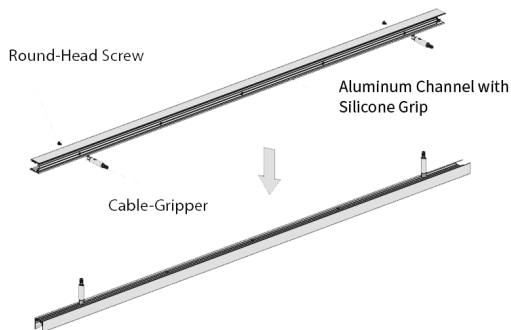


Screw the Hex Bolt to the Cable Gripper. Insert the Round-head Screw into the aluminum channel and through the mounting holes. Screw together the Roundhead Screw and Cable Gripper/ Hex Bolt.

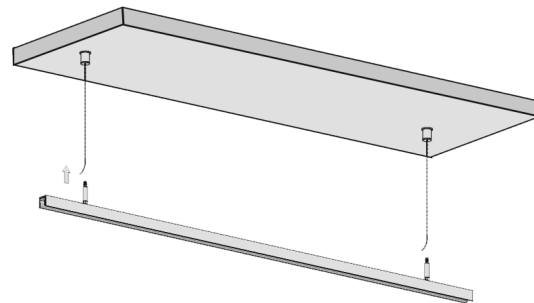

Thread the stainless steel wire through the Cable Gripper Nut and Cable Gripper.

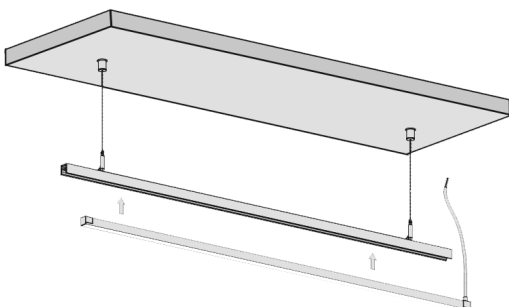

Insert the fixture into the aluminum channel as instructed in the handling guide.

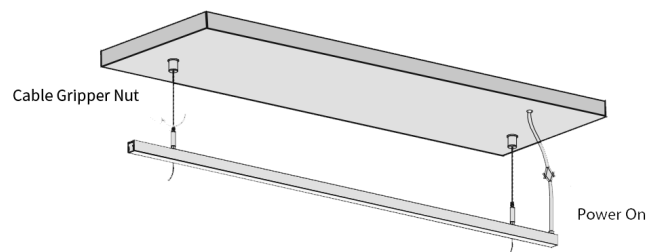

Adjust the length of the stainless steel wires to the desired height and tighten the Cable Gripper Nut. After testing the fixture and confirming the desired position, cut or roll up the excess stainless steel wires.