

ALUMINUM PROFILE - BASIC



High-quality 6063 aluminum with thin-wall, light-weight design to fit the fixture tightly. It is deformation and rust resistant, and cost-effective.




Please refer to install manual for proper installation practices.

Mounting Profile Order Code:


A1	#	A
MOUNTING PROFILE TYPE	STANDARD LENGTH	PROFILE
A1 = Aluminum Basic	2 = 1.38in (35mm) 3 = 19.68in (500mm) 5 = 39.37in (1000mm) 6 = 78.74in (2000mm) X = Custom	A = Vivid Basic



Dimensions + Hardware

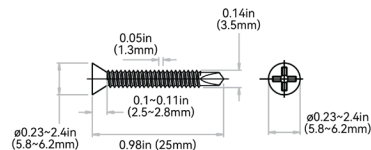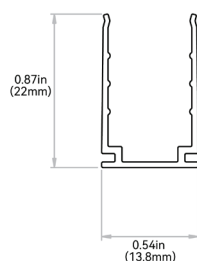

Tolerance: $\pm 0.01\text{in}$ (0.3mm)

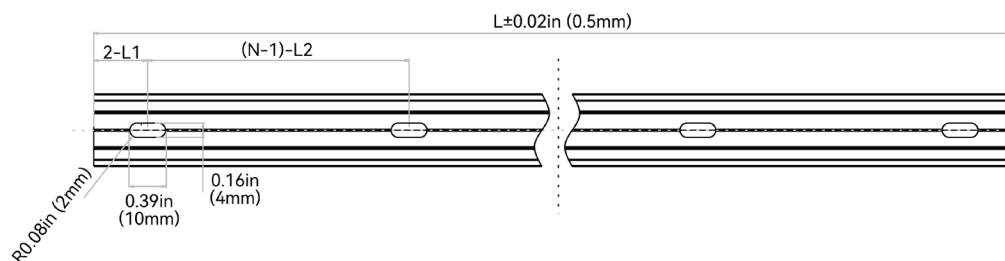

NOTES: 1. 2-L1 refers to two of symmetric L1 in each piece of profile.

2. (N-1)-L2 refers to (N minus one) of symmetric L2 in each piece of profile. "N" hereby stands for its corresponding "Hole Number" in the below table

ORDER CODE	STANDARD LENGTH	L1	L2	SLOTTED HOLE	HOLE #
A1-2-A	1.38in (35mm)	0.69in (17.5mm)	N/A	0.16*0.39in (4*10mm)	1
A1-3-A	19.68in (500mm)	1.97in (50mm)	7.87in (200mm)	0.16*0.39in (4*10mm)	3
A1-5-A	39.37in (1000mm)	3.93in (100mm)	7.87in (200mm)	0.16*0.39in (4*10mm)	5
A1-6-A	78.74in (2000mm)	3.93in (100mm)	7.87in (200mm)	0.16*0.39in (4*10mm)	10

ALUMINUM PROFILE - RECESSED



High-quality 6063 aluminum with thin-wall, light-weight design to fit the fixture tightly. Recommended on projects with lighting mounted recessed in a cavity so only the lens is shown. It is deformation and rust resistant, and cost-effective.




Please refer to install manual for proper installation practices.

Mounting Profile Order Code:


A2	#	A
MOUNTING PROFILE TYPE	STANDARD LENGTH	PROFILE
A2 = Aluminum Recessed	2 = 1.38in (35mm) 3 = 19.68in (500mm) 5 = 39.37in (1000mm) 6 = 78.74in (2000mm) X = Custom	A = Vivid Basic



Dimensions + Hardware

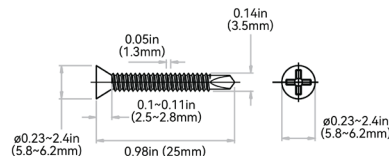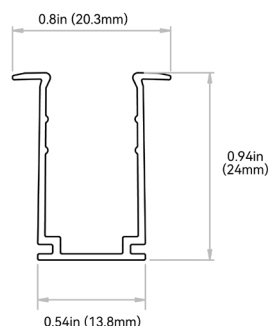

Tolerance: ± 0.01 in (0.3mm)

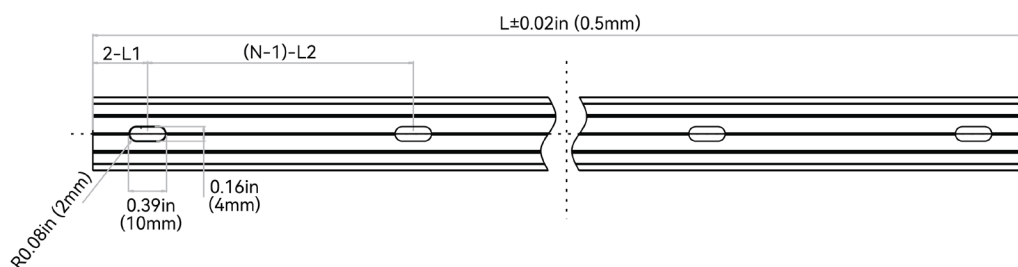

NOTES: 1. 2-L1 refers to two of symmetric L1 in each piece of profile.

2. (N-1)-L2 refers to (N minus one) of symmetric L2 in each piece of profile. "N" hereby stands for its corresponding "Hole Number" in the below table

ORDER CODE	STANDARD LENGTH	L1	L2	SLOTTED HOLE	HOLE #
A2-2-A	1.38in (35mm)	0.69in (17.5mm)	N/A	0.16*0.39in (4*10mm)	1
A2-3-A	19.68in (500mm)	1.97in (50mm)	7.87in (200mm)	0.16*0.39in (4*10mm)	3
A2-5-A	39.37in (1000mm)	3.93in (100mm)	7.87in (200mm)	0.16*0.39in (4*10mm)	5
A2-6-A	78.74in (2000mm)	3.93in (100mm)	7.87in (200mm)	0.16*0.39in (4*10mm)	10

ALUMINUM PROFILE - RECESSED - SILICONE GRIP




High-quality 6063 aluminum with thin-wall, light-weight design. Includes a silicone grip insert designed to hold fixture with additional force. Recommended on projects mounted upside down and recessed. It is deformation and rust resistant, and cost-effective.

Please refer to install manual for proper installation practices.




Mounting Profile Order Code:

A3	#	A
MOUNTING PROFILE TYPE	STANDARD LENGTH	PROFILE
A3 = Aluminum Recessed Silicone Grip	1 = 0.79in (20mm) 3 = 19.68in (500mm) 5 = 39.37in (1000mm) 6 = 78.74in (2000mm) X = Custom	A = Vivid Basic

Dimensions + Hardware

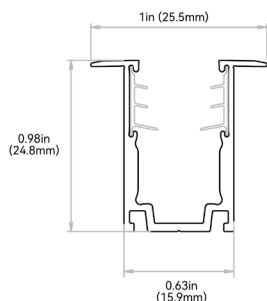

Tolerance: $\pm 0.01\text{in}$ (0.3mm)

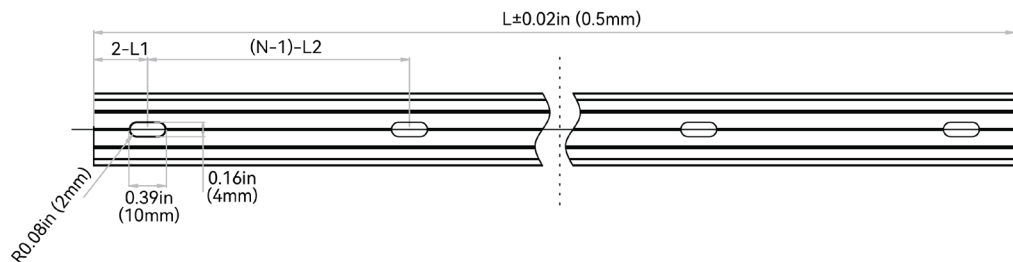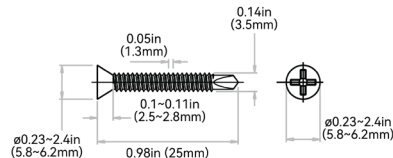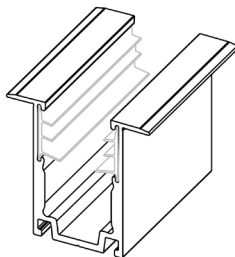

NOTES: 1. 2-L1 refers to two of symmetric L1 in each piece of profile.

2. (N-1)-L2 refers to (N minus one) of symmetric L2 in each piece of profile. "N" hereby stands for its corresponding "Hole Number" in the below table

ORDER CODE	STANDARD LENGTH	L1	L2	SLOTTED HOLE	HOLE #
A3-1-A	0.79in (20mm)	0.39in (10mm)	N/A	0.16*0.39in (4*10mm)	1
A3-3-A	19.68in (500mm)	1.97in (50mm)	7.87in (200mm)	0.16*0.39in (4*10mm)	3
A3-5-A	39.37in (1000mm)	3.93in (100mm)	7.87in (200mm)	0.16*0.39in (4*10mm)	5
A3-6-A	78.74in (2000mm)	3.93in (100mm)	7.87in (200mm)	0.16*0.39in (4*10mm)	10

ALUMINUM PROFILE - SILICONE GRIP





High-quality 6063 aluminum with thin-wall, light-weight design. Includes a silicone grip insert designed to hold fixture with additional force. Recommended on projects mounted upside down. It is deformation and rust resistant, and cost-effective.

Please refer to install manual for proper installation practices.

Mounting Profile Order Code:

A4	#	A
MOUNTING PROFILE TYPE	STANDARD LENGTH	PROFILE
A4 = Aluminum Silicone Grip	1 = 0.79in (20mm) 3 = 19.68in (500mm) 5 = 39.37in (1000mm) 6 = 78.74in (2000mm) X = Custom	A = Vivid Basic

Dimensions + Hardware

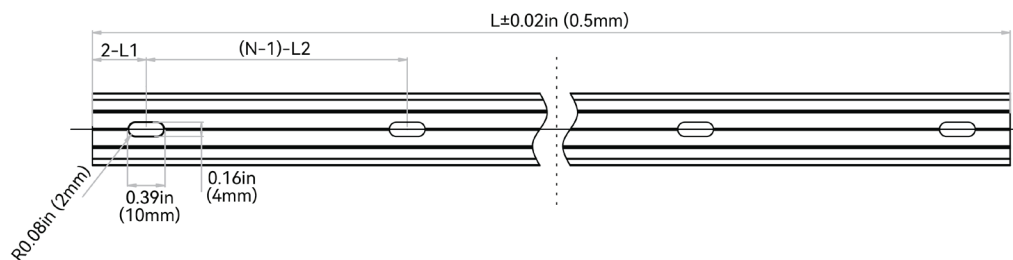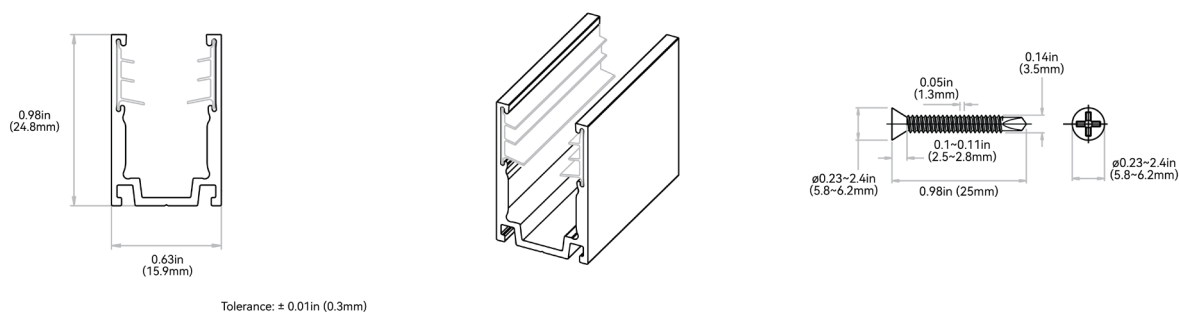


NOTES: 1. 2-L1 refers to two of symmetric L1 in each piece of profile.

2. (N-1)-L2 refers to (N minus one) of symmetric L2 in each piece of profile. "N" hereby stands for its corresponding "Hole Number" in the below table

ORDER CODE	STANDARD LENGTH	L1	L2	SLOTTED HOLE	HOLE #
A4-1-A	0.79in (20mm)	0.39in (10mm)	N/A	0.16*0.39in (4*10mm)	1
A4-3-A	19.68in (500mm)	1.97in (50mm)	7.87in (200mm)	0.16*0.39in (4*10mm)	3
A4-5-A	39.37in (1000mm)	3.93in (100mm)	7.87in (200mm)	0.16*0.39in (4*10mm)	5
A4-6-A	78.74in (2000mm)	3.93in (100mm)	7.87in (200mm)	0.16*0.39in (4*10mm)	10

ALUMINUM PROFILE - FLEXIBLE

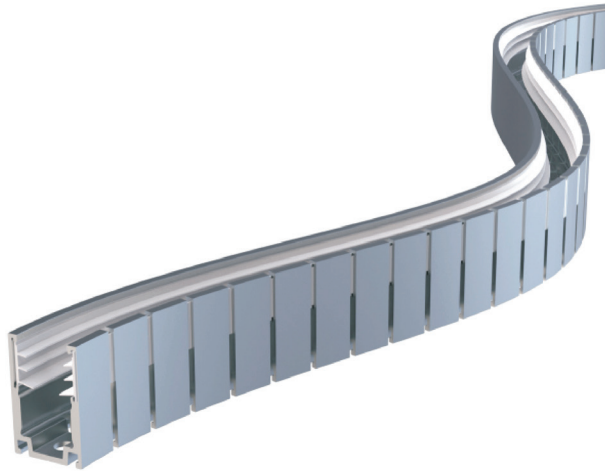

It is an expanded design of the flexible aluminum profile, and caters for the continuously streamlined aesthetics of curve shape. The secondary precision cutting process, not only maintains the advantage of clamping force, but also enables the two-way horizontal bending directions with super shape memory.


Please refer to install manual for proper installation practices.

Mounting Profile Order Code:




A5	#	A
MOUNTING PROFILE TYPE	STANDARD LENGTH	PROFILE
A5 = Aluminum Flexible	3 = 19.68in (500mm) 5 = 39.37in (1000mm) X = Custom	A = Vivid Basic



Dimensions + Hardware

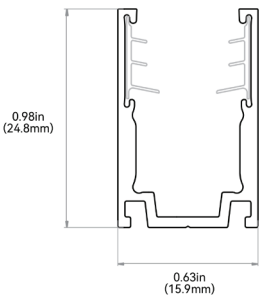

Tolerance: ± 0.01in (0.3mm)

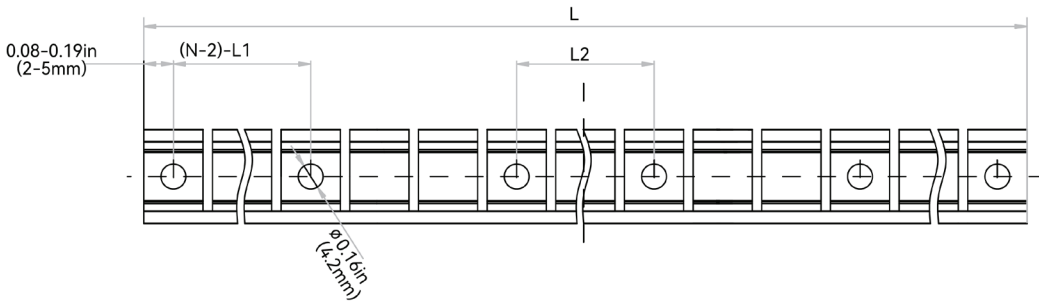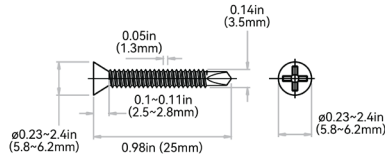

NOTES: 1. 2-L1 refers to two of symmetric L1 in each piece of profile.
2. (N-1)-L2 refers to (N minus one) of symmetric L2 in each piece of profile. "N" hereby stands for its corresponding "Hole Number" in the below table

ORDER CODE	STANDARD LENGTH	L1	L2	SLOTTED HOLE	HOLE #
A5-3-A	19.68in (500mm)	4.34in (110.3mm)	1.92in (48.9mm)	Ø0.17in (4.2mm)	6
A5-5-A	39.37in (1000mm)	4.59in (116.5mm)	3.89in (98.8mm)	Ø0.17in (4.2mm)	10


ALUMINUM PROFILE - RACEWAY

High-quality 6063 thin-wall aluminum, light-weight design featuring hidden cables. The raceway space is enough to conceal seamless connectors with bottom feed and the general male/female connectors. It is superb for the facade where tidiness is required and the scenarios that lack of space for wiring.


Please refer to install manual for proper installation practices.

Mounting Profile Order Code:

A8	#	A
MOUNTING PROFILE TYPE	STANDARD LENGTH	PROFILE
A8 = Aluminum Raceway	3 = 19.68in (500mm) 5 = 39.37in (1000mm) 6 = 78.74in (2000mm) X = Custom	A = Vivid Basic

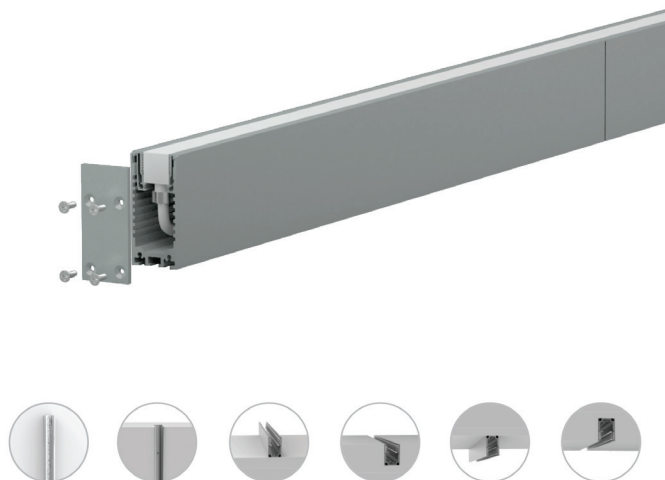

Dimensions + Hardware

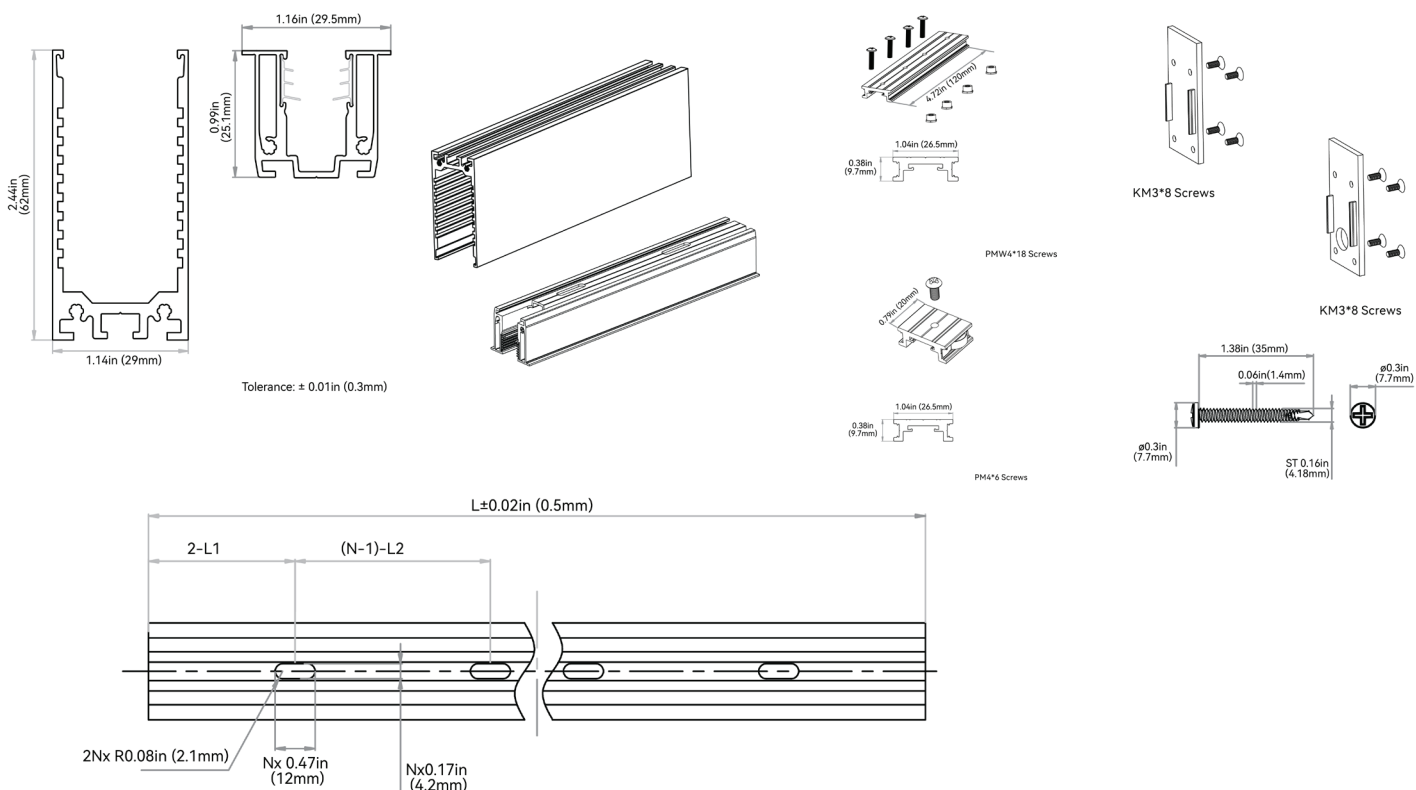

NOTES: 1. 2-L1 refers to two of symmetric L1 in each piece of profile.

2. (N-1)-L2 refers to (N minus one) of symmetric L2 in each piece of profile. "N" hereby stands for its corresponding "Hole Number" in the below table

ORDER CODE	STANDARD LENGTH	L1	L2	SLOTTED HOLE	HOLE #
A8-3-A	19.68in (500mm)	1.97in (50mm)	7.87in (200mm)	0.18*0.47in (4.5*12mm)	3
A8-5-A	39.37in (1000mm)	3.93in (100mm)	7.87in (200mm)	0.18*0.47in (4.5*12mm)	5
A8-6-A	78.74in (2000mm)	3.93in (100mm)	7.87in (200mm)	0.18*0.47in (4.5*12mm)	10

ALUMINUM PROFILE - RACEWAY - SUSPENDED










High-quality 6063 thin-wall aluminum, light-weight design featuring hidden cables and suspended by cables from the ceiling. The raceway space is enough to conceal seamless connectors with bottom feed and the general male/female connectors. It is superb for the facade where tidiness is required and the scenarios that lack of space for wiring.

Please refer to install manual for proper installation practices.

Mounting Profile Order Code:

A9	#	A
MOUNTING PROFILE TYPE	STANDARD LENGTH	PROFILE
A9 = Aluminum Raceway Suspended	3 = 19.68in (500mm) 5 = 39.37in (1000mm) 6 = 78.74in (2000mm) X = Custom	A = Vivid Basic

Dimensions + Hardware

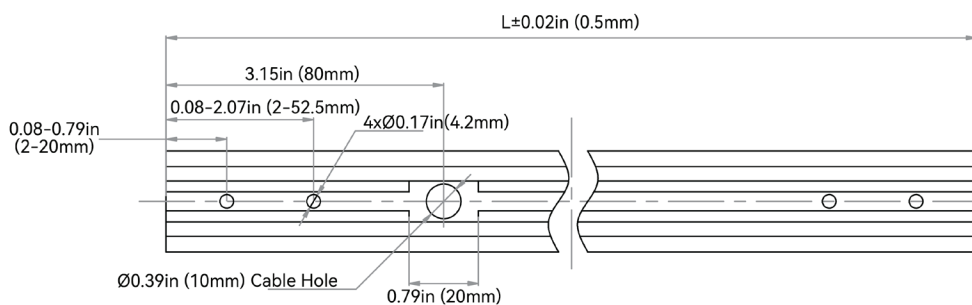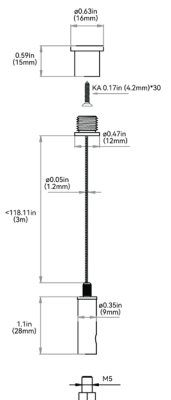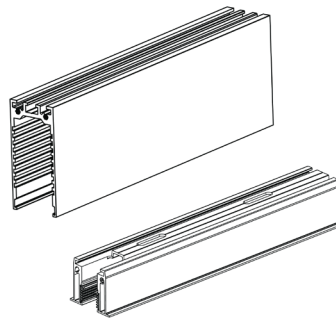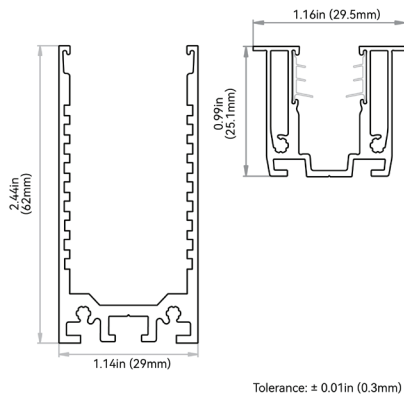

ORDER CODE	STANDARD LENGTH
A9-3-A	19.68in (500mm)
A9-5-A	39.37in (1000mm)
A9-6-A	78.74in (2000mm)

PLASTIC PROFILE – REINFORCED






High Quality rigid plastic designed to securely hold fixtures. Recommended for use in extreme environments susceptible to increased water/humidity (SPA's and pools).

Please refer to install manual for proper installation practices.


Mounting Profile Order Code:

P1	#	A
MOUNTING PROFILE TYPE	STANDARD LENGTH	PROFILE
P1 = Plastic Reinforced	2 = 1.38in (35mm) 3 = 19.68in (500mm) 5 = 39.37in (1000mm) 6 = 78.74in (2000mm) X = Custom	A = Vivid Basic

Dimensions + Hardware

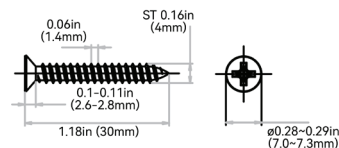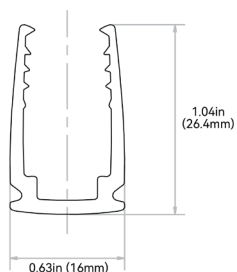

Tolerance: $\pm 0.02\text{in}$ (0.5mm)

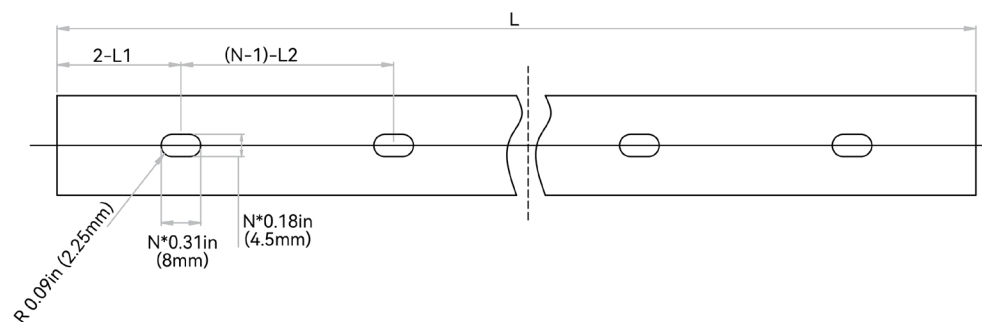

NOTES: 1. 2-L1 refers to two of symmetric L1 in each piece of profile.

2. (N-1)-L2 refers to (N minus one) of symmetric L2 in each piece of profile. "N" hereby stands for its corresponding "Hole Number" in the below table

ORDER CODE	STANDARD LENGTH	L1	L2	SLOTTED HOLE	HOLE #
P1-2-A	1.38in (35mm)	0.69in (17.5mm)	N/A	0.18*0.31in (4.5*8mm)	1
P1-3-A	19.68in (500mm)	1.97in (50mm)	7.87in (200mm)	0.18*0.31in (4.5*8mm)	3
P1-5-A	39.37in (1000mm)	3.93in (100mm)	7.87in (200mm)	0.18*0.31in (4.5*8mm)	5
P1-6-A	78.74in (2000mm)	3.93in (100mm)	7.87in (200mm)	0.18*0.31in (4.5*8mm)	10

STAINLESS STEEL PROFILE - CLIP



It uses grade 316 stainless steel with excellent property of deformation and rust resistance. The material makes it suitable for humid coastal surroundings and weak acid-base industrial environments that other mounting profiles can't accommodate. The structural design and material characteristics collectively ensure a tight clamping force. It's very convenient and reliable even for suspended installation in the curve shape.


Please refer to install manual for proper installation practices.

Mounting Profile Order Code:





S1	#	A
MOUNTING PROFILE TYPE	STANDARD LENGTH	PROFILE
S1 = Stainless Steel Clip	2 = 1.38in (35mm) X = Custom	A = Vivid Basic



Dimensions + Hardware

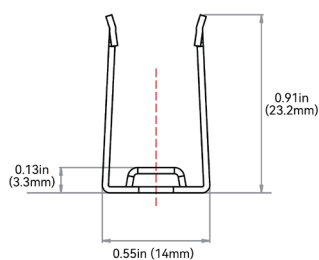

Tolerance: $\pm 0.01\text{in}$ (0.3mm)

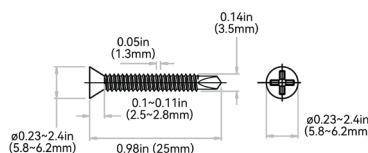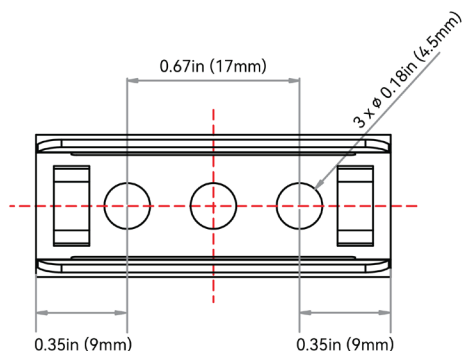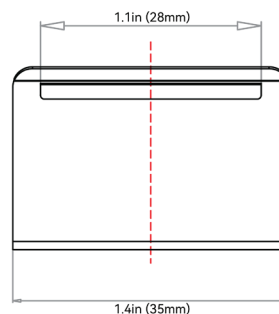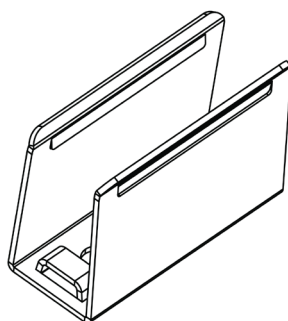

ORDER CODE	STANDARD LENGTH	SLOTTED HOLE	HOLE #
S1-2-A	1.38in (35mm)	ø0.18in (4.5mm)	3