



Gates & Fences

Customisable Designs

Brochure

ENVIRON[™]
METAL DESIGNS

M 0413 633 776

E hello@environmdesigns.com.au

A 14 Arctic Ct
Keysborough VIC 3173


W environmdesigns.com.au




Design applications	Side/Pedestrian/ Driveway Gates and Fences
Material	Aluminium grade 6061
Gaps and Centers	Standard or customised
Dimensions	Customised
Product construction	MIG welding
Product finishing	Powder Coated



Cladding Details	TWIN BLADES NO-OVERHANG – Blades flush to frame/rail 90 DEGREES BLADES OVERHANG – Blades pass frame/rail
Standard Gaps	25mm & 50mm gaps
Frame/Rail Sizes	For Latches only: 40/40x40mm SHS For Locks: 50/50x50mm, 100/100x50mm, 50/100x50mm, 50/200x50mm SHS
Cladding Specs	50X10mm Vertical RHS Twin Blade Plastic end caps 90 degrees to frame/rail
Overhang details	Top & Bottom 100mm Blade Overhang from frame/rail
Abbreviations	SHS – Square Hollow Section RHS – Rectangular Hollow Section

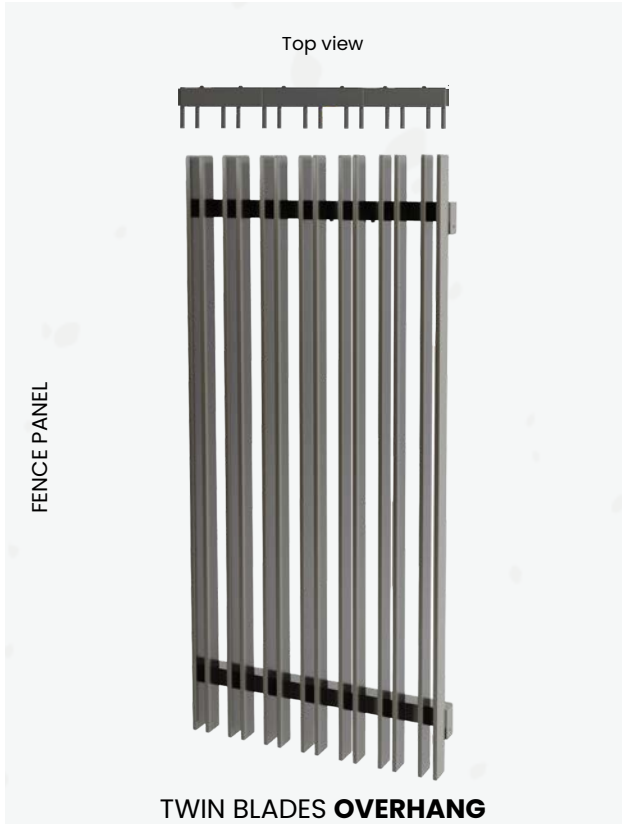

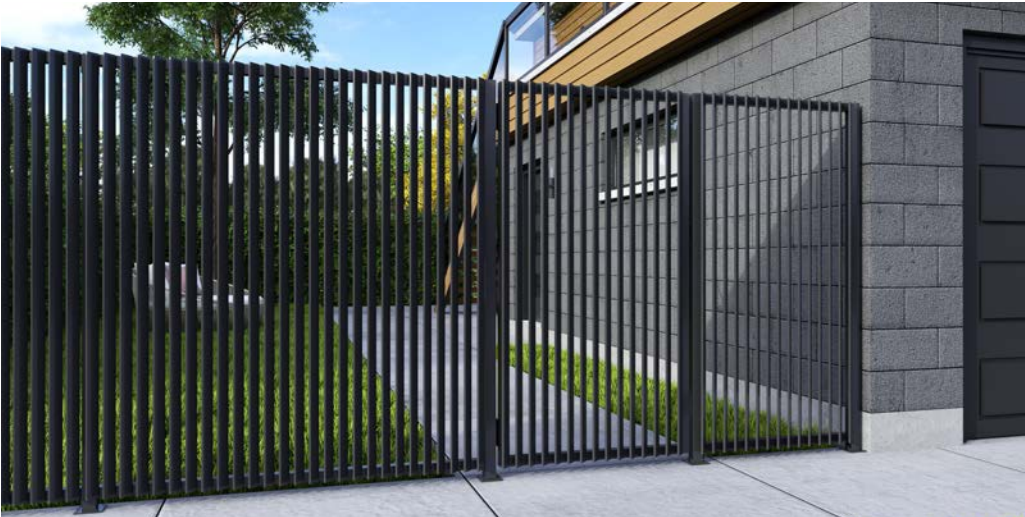

Design applications	Side/Pedestrian/ Driveway Gates and Fences
Material	Aluminium grade 6061
Gaps and Centers	Standard or customised
Dimensions	Customised
Product construction	MIG welding
Product finishing	Powder Coated



Cladding Details	45 DEGREES BLADES NO-OVERHANG - Blades flush to frame/rail
	45 DEGREES BLADES OVERHANG - Blades pass frame/rail
Standard Gaps	2.32mm, 13.57mm, 47.07mm
Frame/Rail Sizes	For Latches only: 40/40x40mm SHS For Locks: 50/50x50mm, 100/100x50mm, 50/100x50mm, 50/200x50mm SHS
Cladding Specs	50X10mm Vertical RHS Blade
	Plastic end caps 45 degrees to frame/rail
Overhang Details	Top & Bottom 100mm Blade Overhang from frame/rail
Abbreviations	SHS – Square Hollow Section RHS – Rectangular Hollow Section






Design applications	Side/Pedestrian/ Driveway Gates and Fences
Material	Aluminium grade 6061
Gaps and Centers	Standard or customised
Dimensions	Customised
Product construction	MIG welding
Product finishing	Powder Coated



Designs Available	90 DEGREES BLADES NO-OVERHANG - Blades flush to frame/rail 90 DEGREES BLADES OVERHANG - Blades pass frame/rail
Standard Gap	50mm
Frame/Rail Sizes	For Latches only: 40/40x40mm SHS For Locks: 50/50x50mm, 100/100x50mm, 50/100x50mm, 50/200x50mm SHS
Cladding Details	50X10mm Vertical RHS Blade Plastic end caps 90 degrees to frame/rail
Overhang details	Top & Bottom 100mm Blade Overhang from frame/rail
Abbreviations	SHS – Square Hollow Section RHS – Rectangular Hollow Section

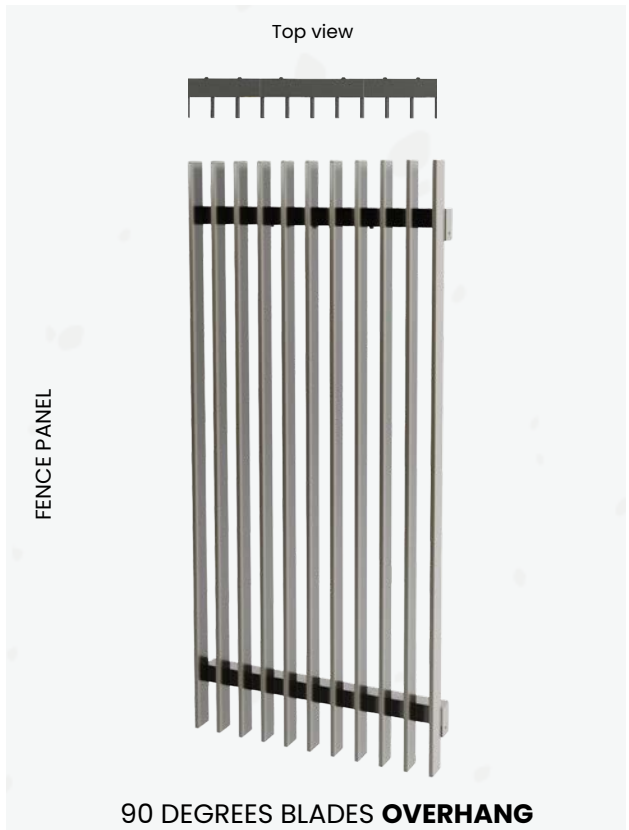




Design applications	Side/Pedestrian/ Driveway Gates and Fences
Material	Aluminium grade 6061
Gaps and Centers	Standard or customised
Dimensions	Customised
Product construction	MIG welding
Product finishing	Powder Coated



Cladding Details	SLATS NO-OVERHANG – Slats flush to frame/rail
	SLATS OVERHANG – Slats pass frame/rail
Standard Gaps	10mm, 15mm, 30mm
Frame/Rail Sizes	For Latches only: 40/40x40mm SHS For Locks: 50/50x50mm, 100/100x50mm, 50/100x50mm, 50/200x50mm SHS
Cladding Specs	50X10mm Vertical RHS Slat
	Plastic end caps Flat to frame/rail
Overhang details	Top & Bottom 100mm Slat Overhang from frame/rail
Abbreviations	SHS – Square Hollow Section RHS – Rectangular Hollow Section

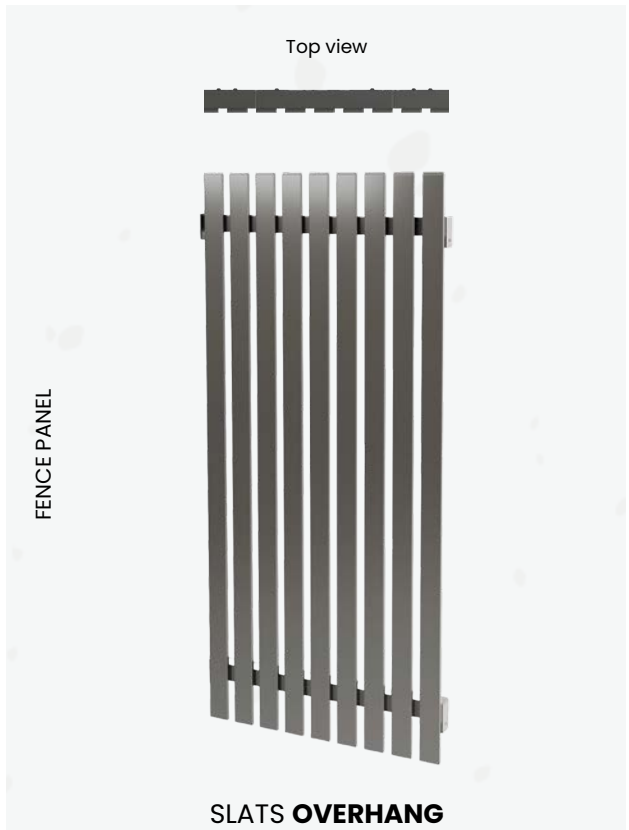



Design applications	Side/Pedestrian/ Driveway Gates and Fences
Material	Aluminium grade 6061
Gaps and Centers	Standard or customised
Dimensions	Customised
Product construction	MIG welding
Product finishing	Powder Coated



Cladding Details	SQUARE BATTENS NO-OVERHANG – Battens flush to frame/rail
	SQUARE BATTENS OVERHANG – Battens pass frame/rail
Standard Gap	28mm
Frame/Rail Designs	For Latches only: 40/40x40mm SHS For Locks: 50/50x50mm, 100/100x50mm, 50/100x50mm, 50/200x50mm SHS
Cladding Sizes	32X32mm Vertical SHS Plastic end caps
Overhang details	Top & Bottom 100mm Batten Overhang from frame/rail
Abbreviations	SHS – Square Hollow Section RHS – Rectangular Hollow Section





Design applications	Side/Pedestrian/ Driveway Gates and Fences
Material	Aluminium grade 6061
Gaps and Centers	Standard or customised
Dimensions	Customised
Product construction	MIG welding
Product finishing	Powder Coated



Cladding Details	ANGLE NO-OVERHANG – Angles flush to frame/rail
	ANGLE OVERHANG – Angles pass frame/rail
Standard Gap	33mm
Frame/Rail Sizes	For Latches only: 40/40x40mm SHS For Locks: 50/50x50mm, 100/100x50mm, 50/100x50mm, 50/200x50mm SHS
Cladding Specs	32X32X3.0Mm Vertical Angle Plastic end caps
Overhang details	Top & Bottom 100mm Angle Overhang from frame/rail
Abbreviations	SHS – Square Hollow Section RHS – Rectangular Hollow Section





ENVIRONTM

METAL DESIGNS

M 0413 633 776

E hello@environmdesigns.com.au

A 14 Arctic Ct
Keysborough VIC 3173

W environmdesigns.com.au

carbon
neutral^Y
Turn Emissions into Trees⁺

PARTNER

PLANT-A-TREE
PROGRAM

