

The Luxury



Quarterly 4 / 4

October 2019

Luxury Vinyl.

■■■■

Considering the past, we imagine a bolder future, visiting places of wonder in order to create a range that broadens perspectives and challenges worldviews.

Belgotex's new LVT collection seeks inspiration in all corners of the world – without having to actually mine any ancient quarries, fell enchanted forests or purloin the hallowed halls of proud African queens.


B.

While each floor is pragmatic in use, by referencing their rich provenance we escape dull monotony and invite the imagination to soar.

If you've ever felt that there might be something bigger beyond the horizon, this is your chance to take flight.



Boasting the natural good looks of wood with the value and technical superiority of vinyl, LVT is an enhanced floorscape unrivalled in its durability and performance. This high-quality, trend-led flooring has been engineered for choice, strength and convenience, as well as being rigorously tested for safety, superior density and heat resistance. Manufactured from virgin PVC, Belgotex LVT has no impurities or hazardous by-products, and has been designed to maintain its integrity, mass density, dimensional stability and joint strength.

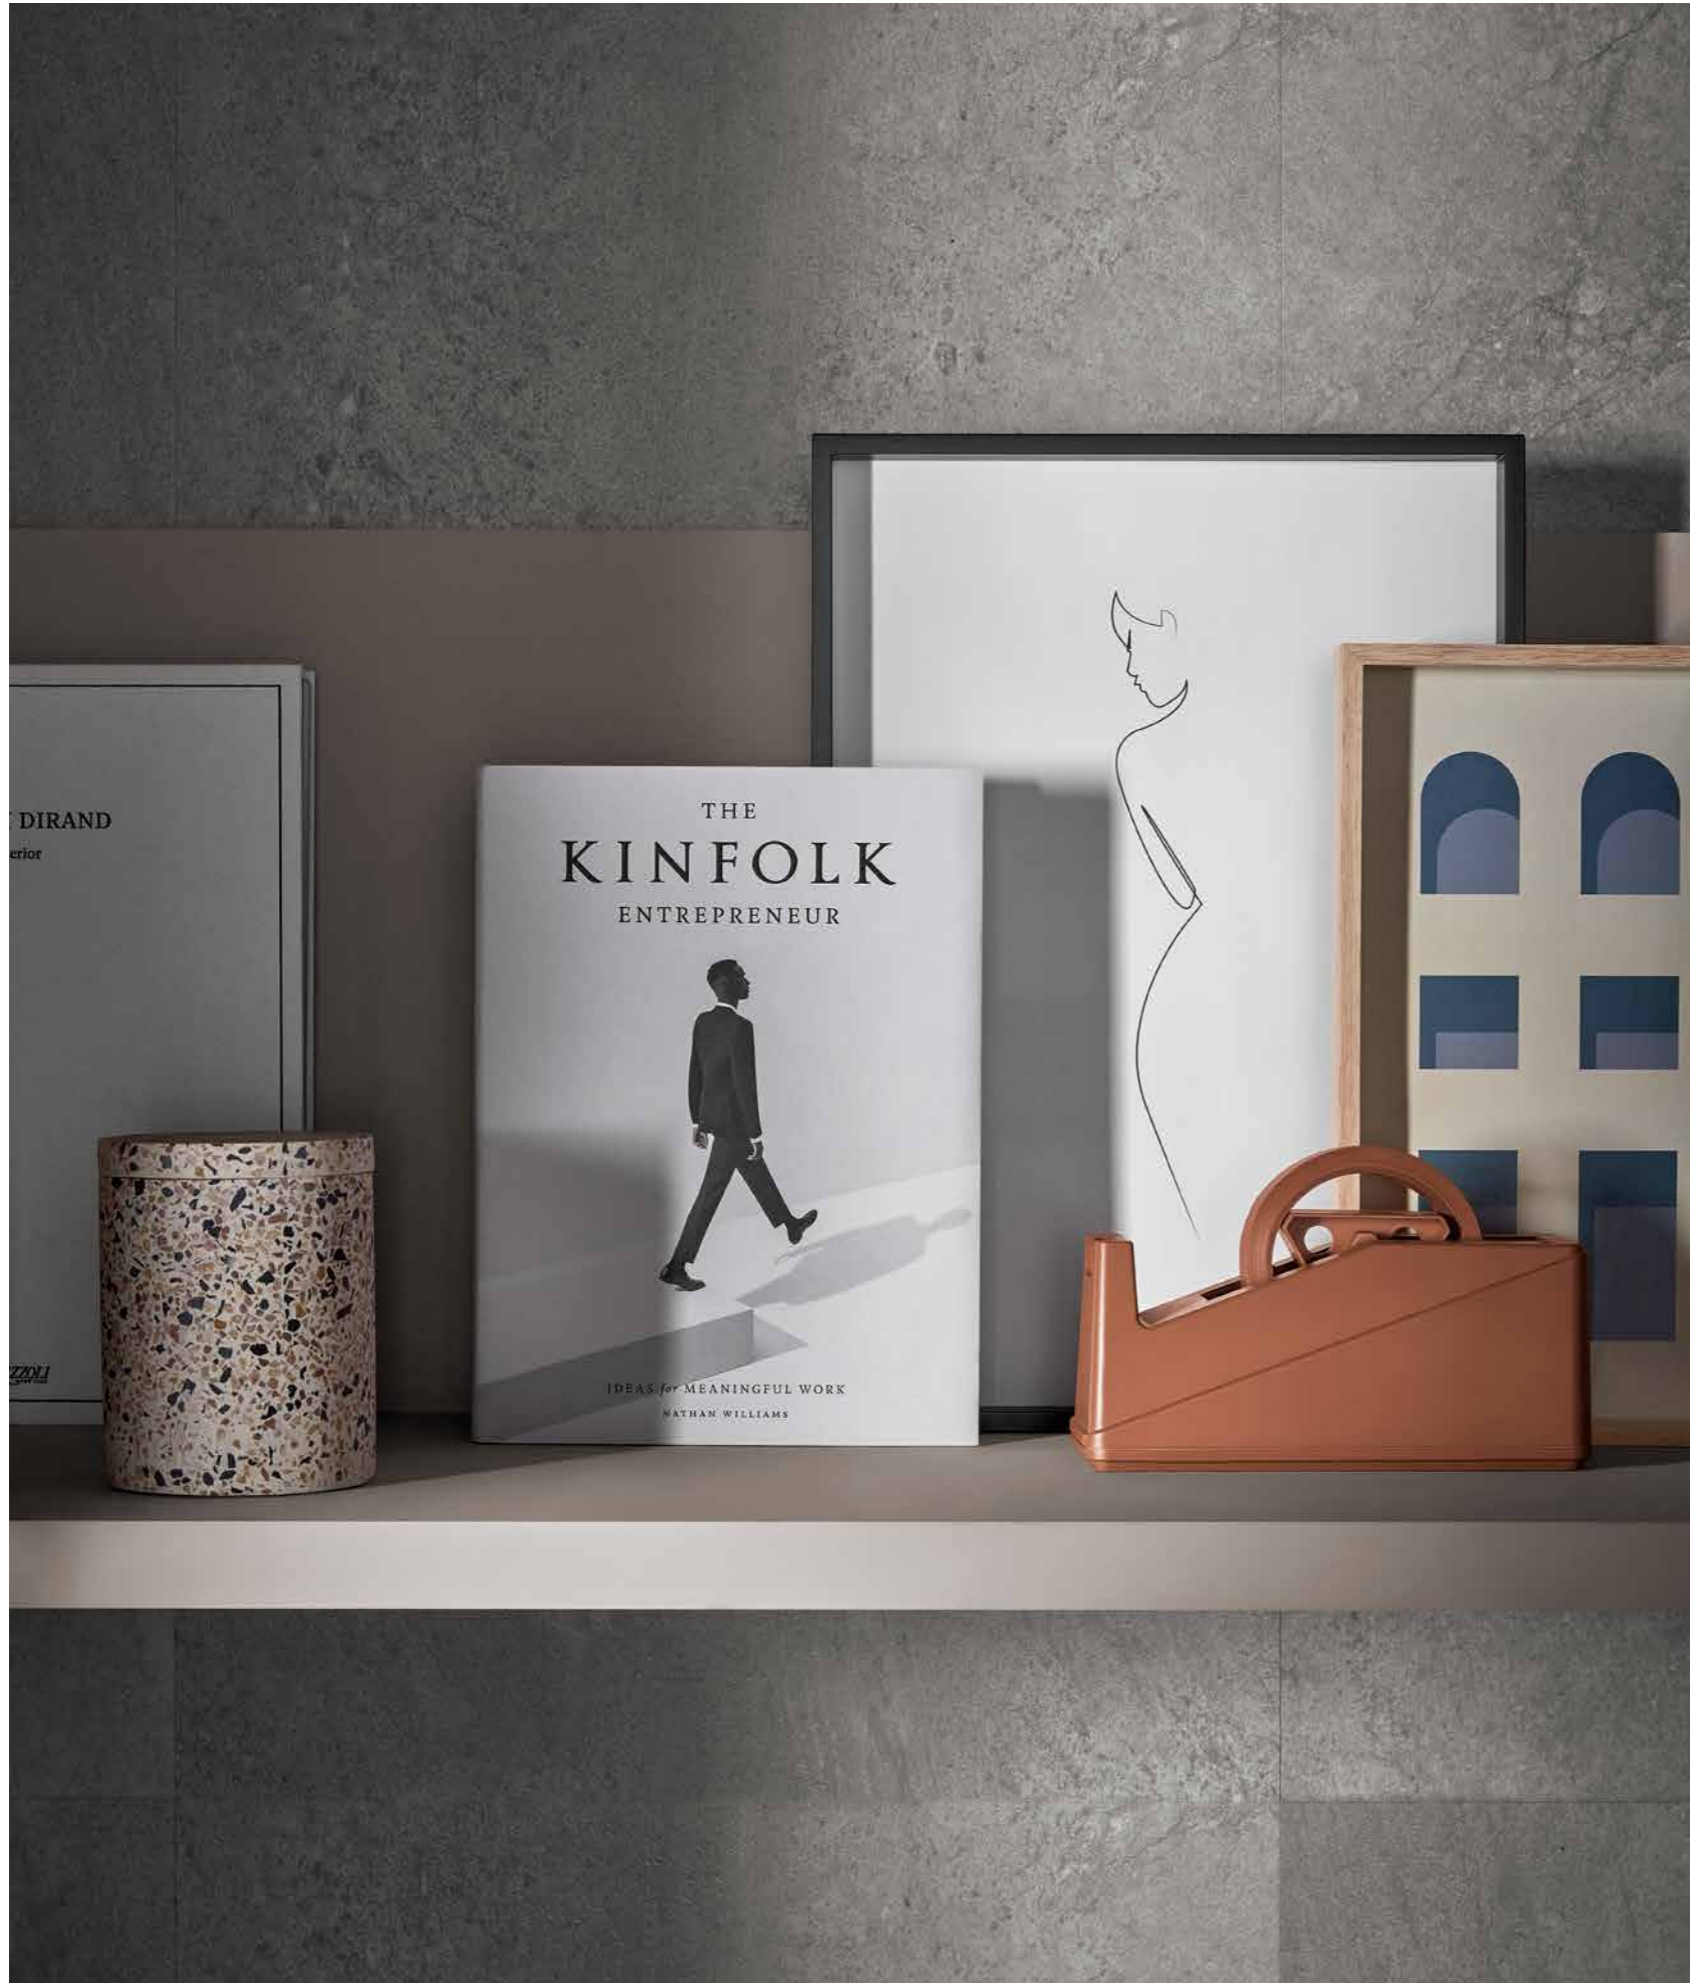

Slab : Sand

**Luxury
Vinyl
Tile.**

Made up of six collections, each with its own distinct qualities and available in colours that will suit most décor schemes, Belgotex's superior LVT inspires customers to reimagine how a floorscape can enrich their lives.

Hardwood: Alder, Ash, Beech, Jarrah, Maple, Oak & Walnut



Fortitude.


A collection inspired by great African Queens, the old world designs and textures are true to the continent with the Herringbone pattern dating back to ancient Egypt and the zig-zag woven look reminiscent of African craft.



Fortitude: Nefertiti

For customers who demand more than the typical wood designs, Fortitude offers an elegant old-world eloquence with depth, strength and resilience. Fit for finer living, these floors are now ready to rule your great rooms.

Plank Size

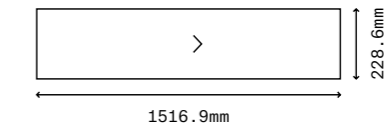

Product Colourways



Amina

Asantewa

Makeda

Nefertiti

Extended Specifications

Type of Installation	Dry Back (Stick Down)
Application	Heavy Commercial
Wear Layer Thickness	0.55mm
Overall Thickness	2.5mm
Plank Size	1516.9mm x 228.6mm (l x w)
Quantity Per Box	3.47m ²
Number of Planks	10 planks per box
Chemical Resistance	YES (EN 26987)
Fire Classification	Bfl-s1 (EN 13501)
Slip Resistance	DS-R10 (DIN 51130)
Residual Indentation	< 0.1mm (EN 24343)
Thermal Conductivity	0.091 W/m*K (EN 12664:2001)
Electrostatic Behaviour	0.1 kV (EN 1815)
Dimensional Stability	≤ 0.25% (EN 23999)
Colour Fastness	m > 6 Grade (ISO 105-B02)
Sound Absorption	Approx. 3dB (EN 10140)
Castor Chair	Yes, Type W (EN 4918)

NOTE: Use soft, non-staining wheels

Hardwood.

The depth of choice offered by one of the most commonly used materials in the world, has seen different varieties of hardwood trees used for everything from the ark to modern architecture.

Now there's a better way, and for naturally good looking floors without the noise, cost or maintenance of real wood, each of these eight colours will add different degrees of warmth and texture to your home.

Product Colourways



Alder Ash Beech




Jarrah Maple Oak



Poplar Walnut


Plank Size

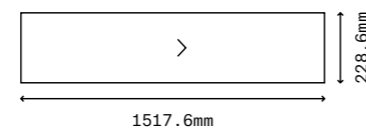

Extended Specifications

Type of Installation	Rigid Board Click
Application	Heavy Commercial
Wear Layer Thickness	0.55m
Overall Thickness	6mm
Plank Size	1517.6mm x 234.9mm (lxw)
Quantity Per Box	2.14m ²
Number of Planks	6 planks per box
Micro Scratch Resistance	Passed (EN 16094)
Effect of Furniture Leg	Passed (EN 424)
Fire Classification	Bfl-s1 (EN 13501)
Slip Resistance	Passed (EN 13893)
Residual Indentation	Passed (EN 24343)
Electrostatic Behaviour	Antistatic (EN 1815)
Dimensional Stability	Passed (EN 23999)
Sound Insulation	Passed (ASTM 492-09)
Castor Chair	Passed (EN 425)

NOTE: Use soft, non-staining wheels

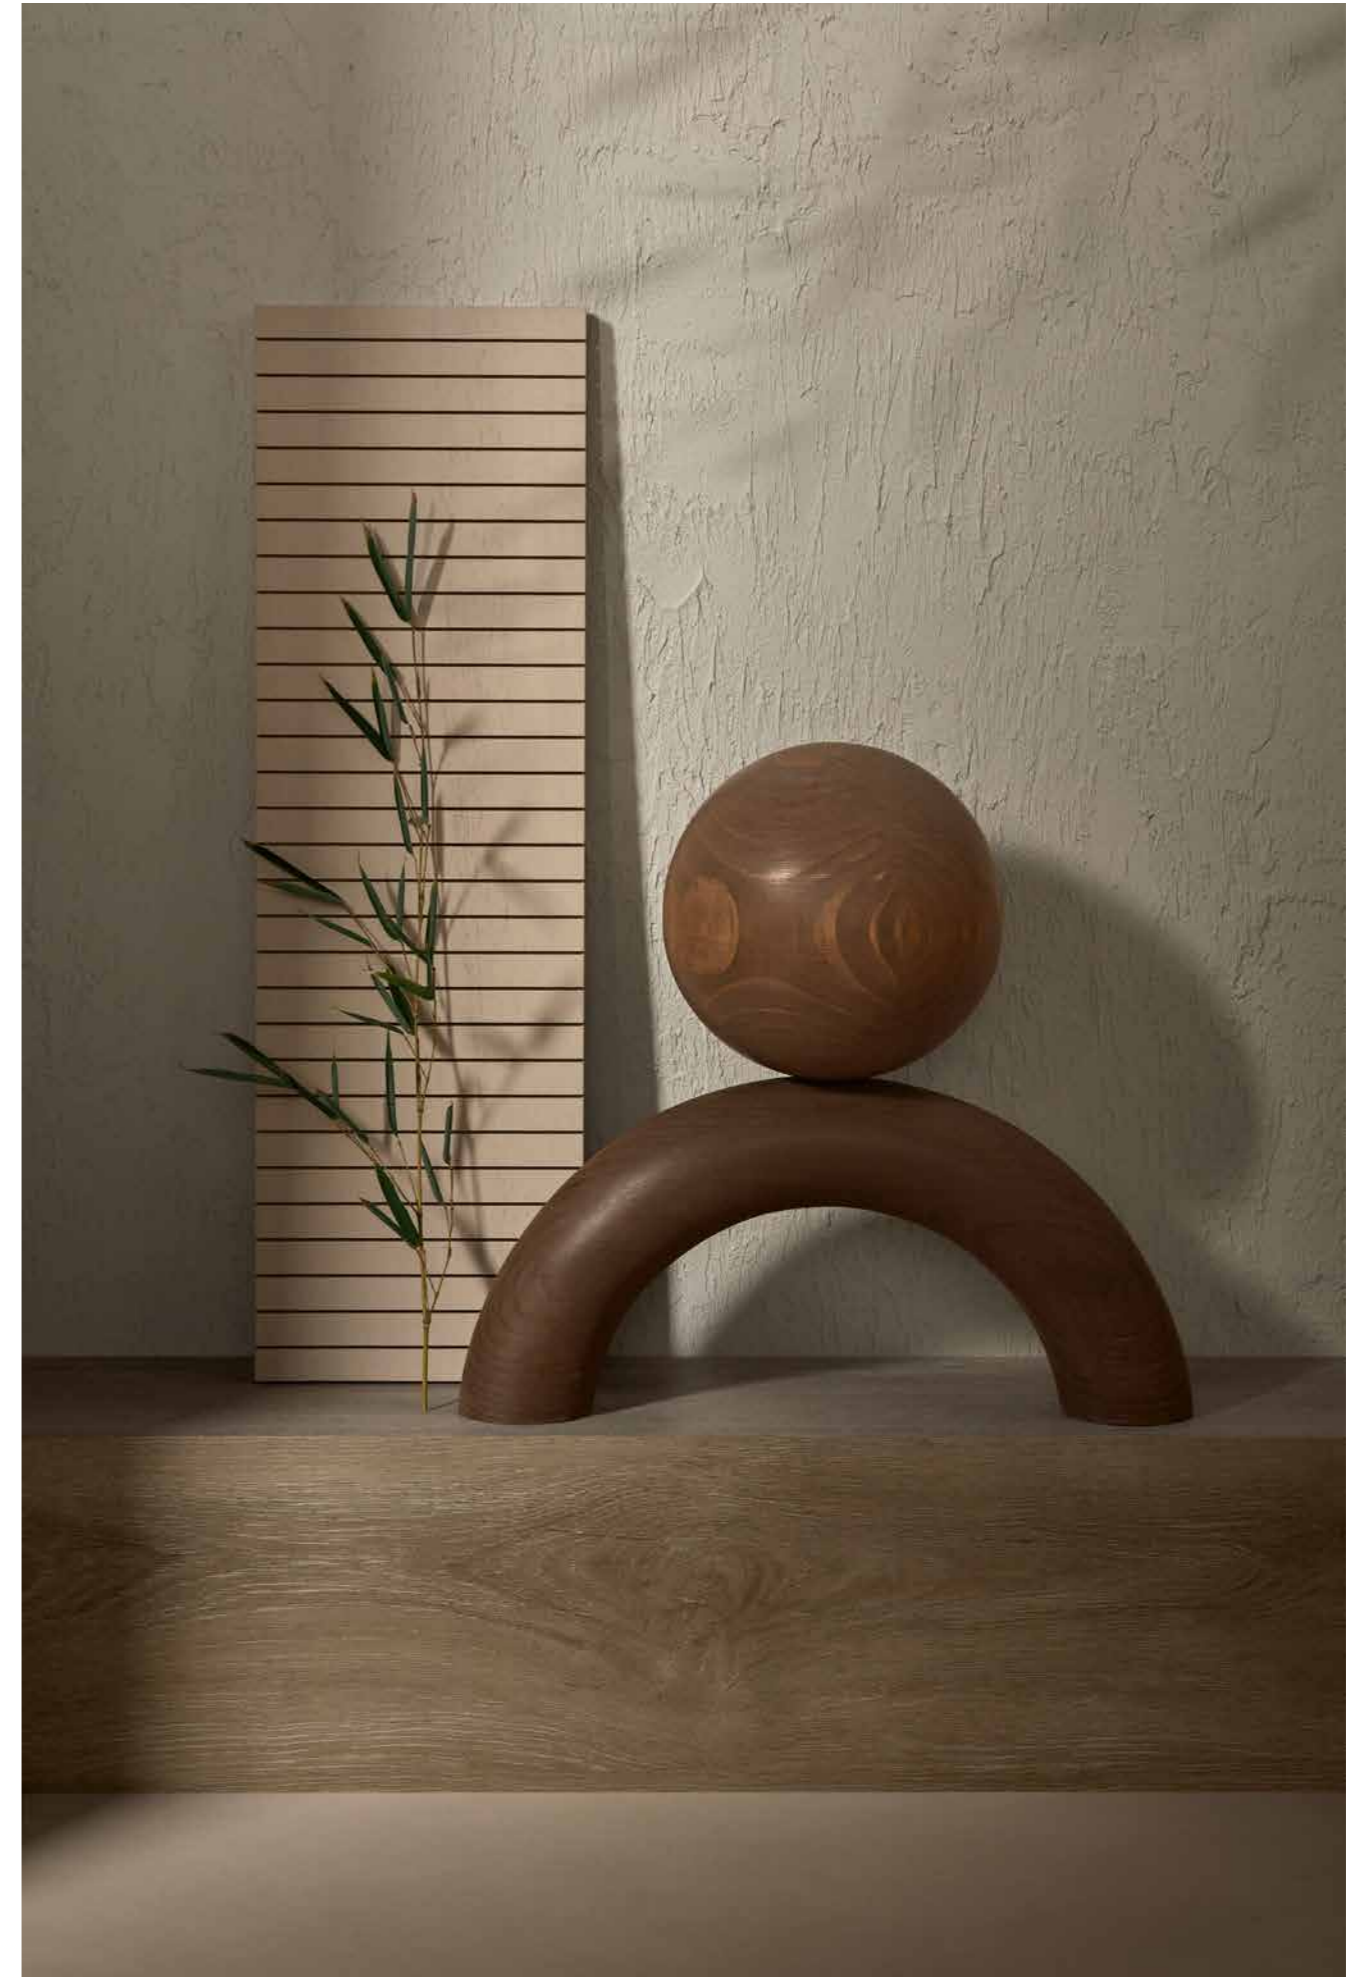

Hardwood: Oak




Sylvan.



There's a strong relationship between the properties of wood and the tree that yielded it.

These eight colours all bear the mythical beauty of the forest – minus the cost to nature and your pocket. Delivering comfort and elegance to every room in your home needn't be a fairy tale, because you deserve to live happily ever after.

Plank Size

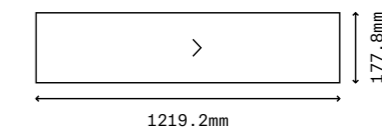

Product Colourways



Extended Specifications

Type of Installation	Dry Back (Stick Down)
Application	Heavy Commercial
Wear Layer Thickness	0.55mm
Overall Thickness	2.5mm
Plank Size	1219.2mm x 177.8mm (lwxw)
Quantity Per Box	3.25m ²
Number of Planks	15 planks per box
Chemical Resistance	YES (EN 26987)
Fire Classification	Bfl-s1 (EN 13501)
Slip Resistance	DS-R10 (DIN 51130)
Residual Indentation	< 0.1mm (EN 24343)
Thermal Conductivity	0.091 W/m*K (EN 12664)
Electrostatic Behaviour	0.1 kV (EN 1815)
Dimensional Stability	≤ 0.25% (EN 23999)
Colour Fastness	m > 6 Grade (ISO 105-B02)
Sound Absorption	Approx. 3dB (EN 10140)
Castor Chair	Yes, Type W (EN 4918)

NOTE: Use soft, non-staining wheels



Slab.

Unapologetic in its authenticity, this modern and formidable collection comprising three colours has been created for creators to build their dream décor schemes on, from the ground up.


Like concrete, the most commonly used construction material due to its reliability, this range speaks to strength, permanence and hard-wearing reliability.

Product Colourways



Cement Sand Stone

Tile Size

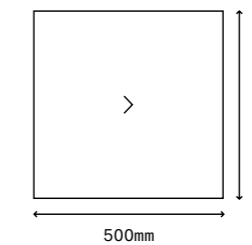


Extended Specifications

Type of Installation	Dry Back (Stick Down)
Application	Heavy Commercial
Wear Layer Thickness	0.55m
Overall Thickness	2.5mm
Tile Size	500mm x 500mm
Quantity Per Box	4.0m ²
Number of Tiles	16 tiles per box
Chemical Resistance	YES (EN 26987)
Fire Classification	Bfl-s1 (EN 13501)
Slip Resistance	DS-R10 (DIN 51130)
Residual Indentation	< 0.1mm (EN 24343)
Thermal Conductivity	0.091 W/m*K (EN 12664)
Electrostatic Behaviour	0.1 kV (EN 1815)
Dimensional Stability	≤ 0.25% (EN 23999)
Colour Fastness	m > 6 Grade (ISO 105-B02)
Sound Absorption	Approx. 3dB (EN 10140)
Castor Chair	Yes, Type W (EN 4918)

NOTE: Use soft, non-staining wheels

Terrazzi.


Traditional Terrazzo derives from the 18th century Venetian pavements where marble, quartz, granite or glass chips were mixed into the cement, ground and polished smooth for a uniformly textured surface.

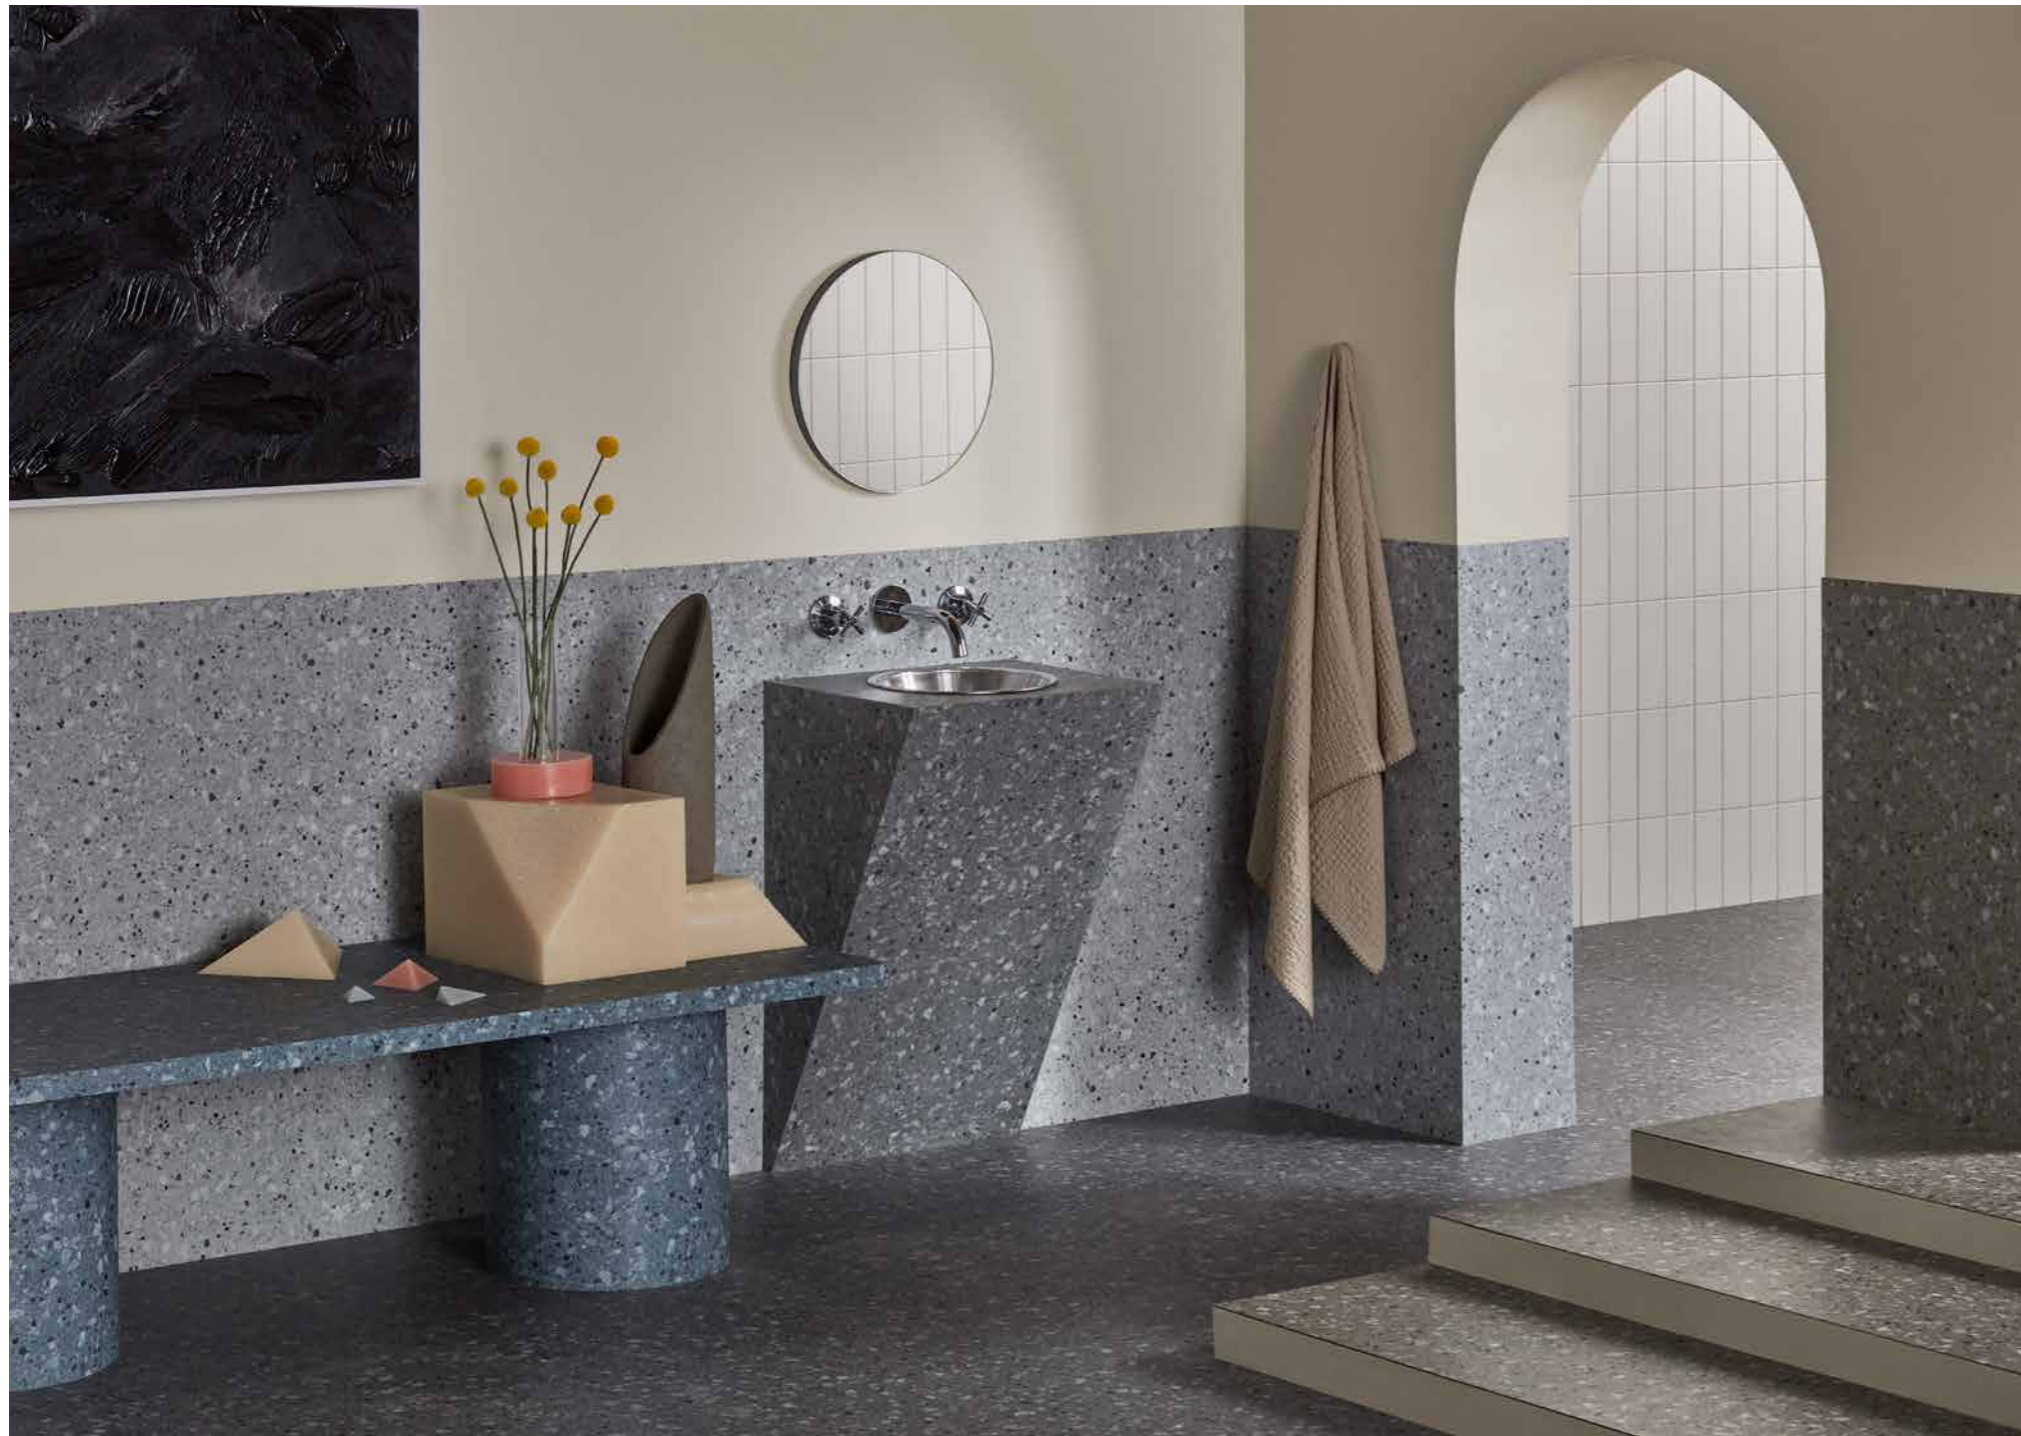


Terrazzi: Milano, Sardegna, Sicilia & Vaticano

Technological advances in vinyl flooring has made it possible for this collection of four ultra-realistic colours to exploit the depth, nuance and unique beauty of traditional Terrazzo. Our Terrazzo-look range offers the same depth and rich beauty, at a fraction of the price. It's also warmer and softer.

Tile Size

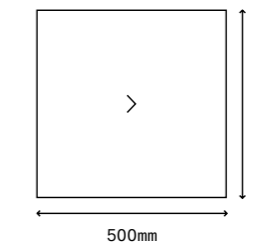

Product Colourways

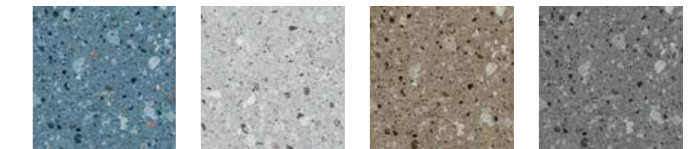

Milano

Sardegna

Sicilia

Vaticano

Extended Specifications

Type of Installation	Dry Back (Stick Down)
Application	Heavy Commercial
Wear Layer Thickness	0.55m
Overall Thickness	2.5mm
Tile Size	500mm x 500mm
Quantity Per Box	4.0m ²
Number of Tiles	16 tiles per box
Chemical Resistance	YES (EN 26987)
Fire Classification	Bfl-s1 (EN 13501)
Slip Resistance	DS-R10 (DIN 51130)
Residual Indentation	< 0.1mm (EN 24343)
Thermal Conductivity	0.091 W/m*K (EN 12664)
Electrostatic Behaviour	0.1 kV (EN 1815)
Dimensional Stability	≤ 0.25% (EN 23999)
Colour Fastness	m > 6 Grade (ISO 105-B02)
Sound Absorption	Approx. 3dB (EN 10140)
Castor Chair	Yes, Type W (EN 4918)

NOTE: Use soft, non-staining wheels

Morphic.

Marble is rock that has undergone transformation by heat or pressure. Taking inspiration from this, we created a luxury vinyl tile that's able to elevate any room.

Transform your space into a testament to good taste using these four stunning colours, each of which bear the unique and rich diversity of marble.

Product Colourways




Makrana Markina



Nehodiv Wunsiedel

Tile Size

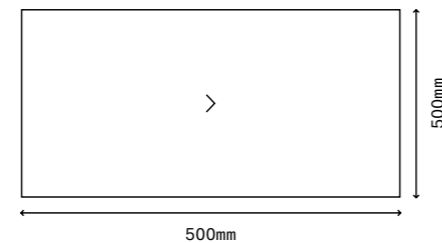

Extended Specifications

Type of Installation	Dry Back (Stick Down)
Application	Heavy Commercial
Wear Layer Thickness	0.55mm
Overall Thickness	2.5mm
Tile Size	1000mm x 500mm (l x w)
Quantity Per Box	4.0m ²
Number of Tiles	8 tiles per box
Chemical Resistance	YES (EN 26987)
Fire Classification	Bfl-s1 (EN 13501)
Slip Resistance	DS-R10 (DIN 51130)
Residual Indentation	< 0.1mm (EN 24343)
Thermal Conductivity	0.091 W/m*K (EN 12664)
Electrostatic Behaviour	0.1 kV (EN 1815)
Dimensional Stability	≤ 0.25% (EN 23999)
Colour Fastness	m > 6 Grade (ISO 105-B02)
Sound Absorption	Approx. 3dB (EN 10140)
Castor Chair	Yes, Type W (EN 4918)

NOTE: Use soft, non-staining wheels



Morphic: Makrana, Markina, Nehodiv & Wunsiedel



Belgotex™

Cape Town Design Centre: Showroom B, The Matrix, 8 Bridgeway, Century City.

Johannesburg Showroom: 1 on Jameson Ave, Cnr. Glenhove Rd & Jameson Ave, Ground Floor, Melrose Estate.

Durban Showroom: 31 Solstice Road, Umhlanga Ridge. / belgotex.co.za