Terrazzi

Derived from 18th century Venetian pavements where marble, quartz, granite, or glass bonded in cement and then polished, technological advances in vinyl flooring has made it possible for this range of four colours to exploit the depth, nuance and unique beauty of traditional Terrazzo.

Extended Specifications

Heavy Commercial Use Classification: Type of Installation: Dry Back (Stick Down)

Overall Thickness: 2.5mm Wear Layer Thickness: 0.55mm

Tile Size: 500mm x 500mm (l x w)

VOC Tested: Passed

Global GreenTag Certification:

Quantity Per Box: 4.0m2

Number of tiles: 16 tiles per box Chemical Resistance: YES (EN 26987) Bfl-s1 (EN13501) Fire Index:

Residual Indentation: Electrostatic Behaviour: 0.1 kV (EN 1815) Dimensional Stability: Colour Fastness:


Sound Absorption:

Castor Chair:

Slip Resistance:

DS-R10 (DIN 51130) < 0.1mm (EN 24343) Thermal Conductivity: 0.091 W/m*K (EN 12664) ≤0.25% (EN 23999) > 6 Grade (ISO 105-B02) Approx. 3dB (EN 10140) Yes, Type W (EN 4918)

> (Use soft non-staining wheels)

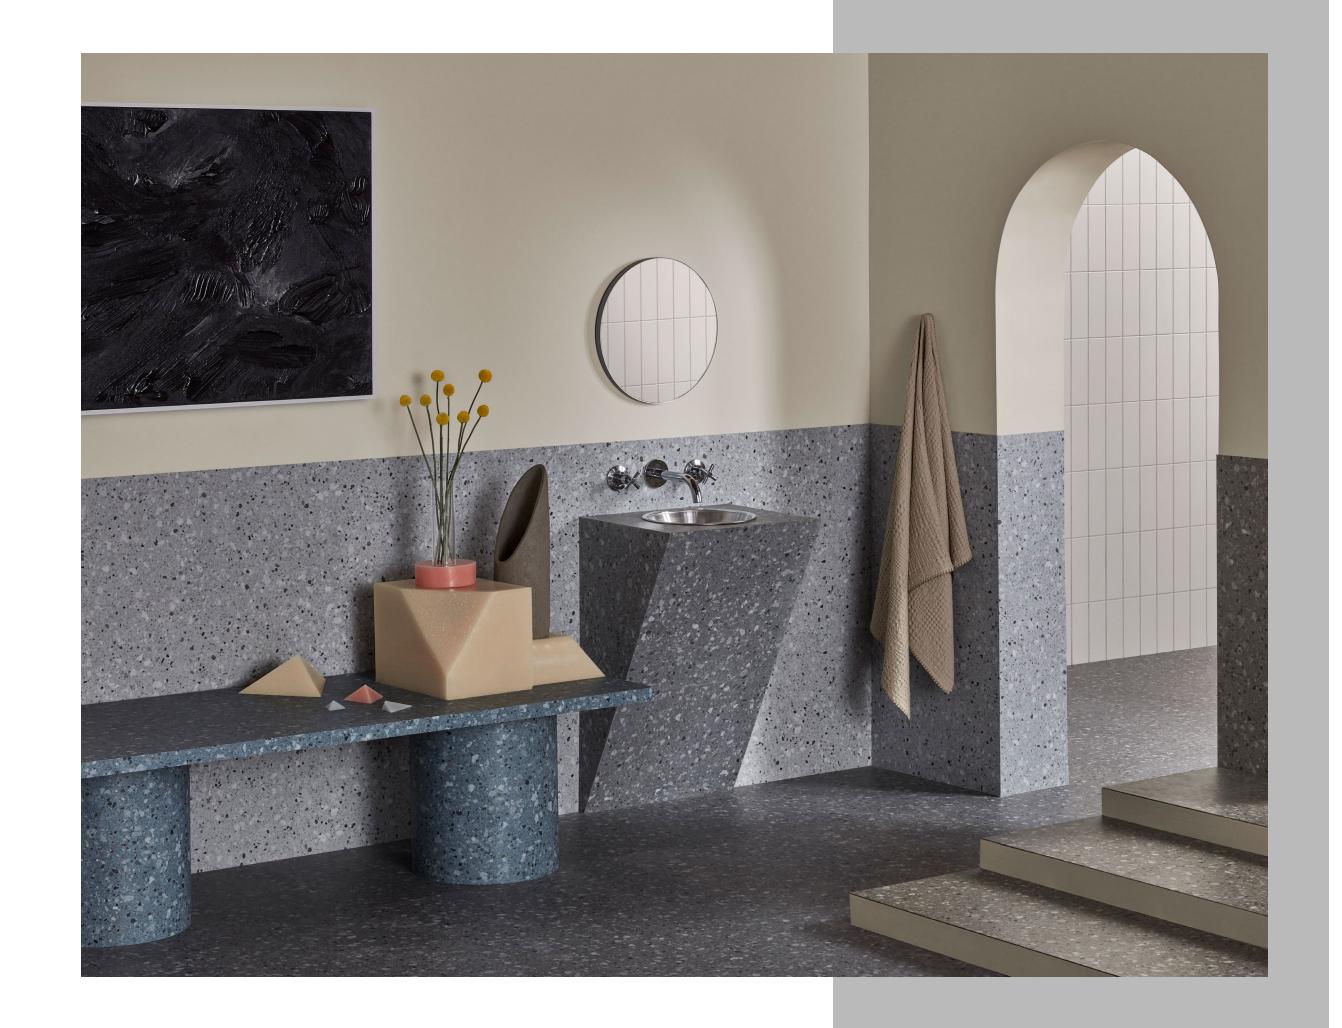








Sardegna



Sicilia



Vaticano

Terrazzi



























Bill of Quantities

- Belgotex Terrazzi 2.5mm heavy commercial dry back stick down LVT.
- 500mm x 500mm (l x w) with 0.55 mm wear layer.
- 20-year residential warranty and 10-year commercial warranty.
- · This product is to be laid in accordance with SANS 10070 fitting code of practice.
- Belgotex recommends the use of a 60mm unhooded soft castor, with a 23mm or 38mm diameter, designed for a 60kg loading capacity per a castor. Recommended material is high impact nylon core and hub with soft grey/black PU treads on the wheel.
- Green tag level A Gold rated certification.

*All product names and logos are trademarks of BELGOTEX FLOORCOVERINGS® (Pty) Ltd. © BELGOTEX FLOORCOVERINGS® (Pty) Ltd. All rights reserved. Warranty and guarantee to limitations and conditions. For details contact BELGOTEX FLOORCOVERINGS® (Pty) Ltd.