

B.

Select Plus

Select Plus offers an LVT solution for higher traffic areas. Its 2mm thickness includes a 0.3mm wear layer, and carries a 7-year light commercial & 15-year residential warranty, ideal for creating sophisticated looks in hotel bedrooms and residential spaces.

Extended Specifications

Type of Installation:	Dry Back (Stick Down)
Use Classification:	Medium Commercial
Total Mass:	3550 (g/m²) 114.5 (oz/yd²)
Wear Layer Thickness:	0.3 (mm) 0.0118 (in)
Total Thickness:	2.0 (mm) 0.07 (in)
Tile Size (l x w):	1219.2 × 228.6 (mm) 9 × 48 (in)
Quantity Per Box:	15
Chemical Resistance:	Yes (EN ISO 26987)
Fire Classification:	Bfl-s1 (EN 13501-1)
Slip Resistance:	R10 (DIN 51130)
Residual Indentation:	<0.1mm (EN ISO 24343-1)
Thermal Resistance:	0.027(m²*K)/W



B.

Select Plus

Extended Specifications

Electrostatic Propensity: (Body Voltage Test)	0.1kV (EN 1815 Method A)
Dimensional Stability:	≤0.25% (EN ISO 23999)
Colour Fastness:	>6 Grade (ISO 105-B02)
Sound Absorption:	Approx. 3 dB (EN ISO 10140-3)
Castor Chair Suitability:	Yes, Type W (EN ISO 4918)
Floor Heating System:	Yes, max 27°C
VOC Emissions:	Floorscore SCS-FS-03336
Warranty:	7 year commercial / 15 year residential
Sustainability:	Floorscore



B.



Fab




Chic




Fine



Uber

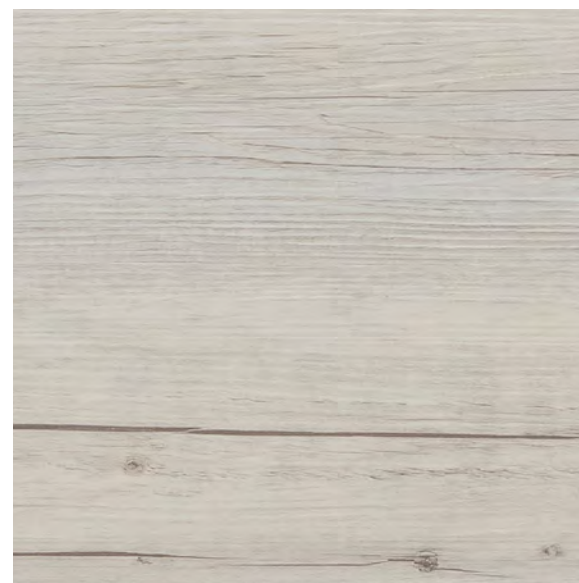

Rad

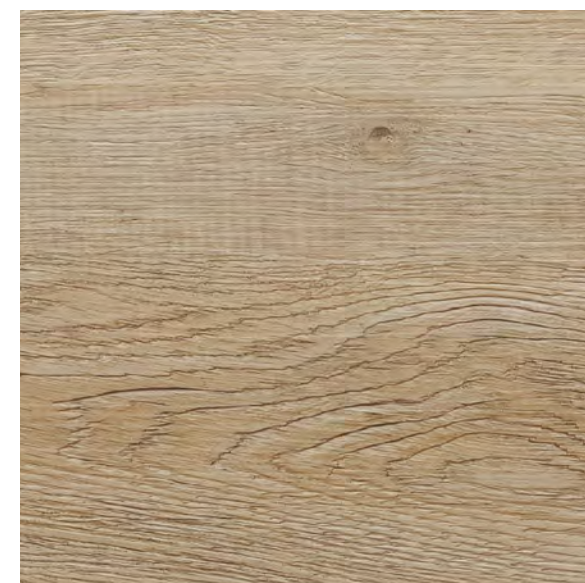

Snazzy

Select Plus



Heavy Residential





Medium/General Commercial




COMMERCIAL WARRANTY
7 YEAR



RESIDENTIAL WARRANTY
15 YEAR



Suitable for Staircases



Office Chair Castor Wheels



100% WATERPROOF



100% WATERPROOF



POLYURETHANE TREATED SURFACE




BN-S1



Natural Look



Anti-Bacterial



Underfloor Heating



E1 MCHO



GREEN TAG CERTIFIED
trust brands



bsi ISO 9001
Quality Management Systems
CERTIFIED



bsi ISO 14001
Environmental Management
CERTIFIED



bsi ISO 45001
Occupational Health and Safety
Management
CERTIFIED



Bill of Quantities

- Belgotex's SELECT PLUS is available as $\pm 2.0\text{mm}$ (total thickness) Medium Commercial Use Dry back-stick down LVT vinyl.
- $1219.2 \times 228.6\text{mm}$ with 0.3mm wear layer.
- 7 year commercial warranty and 15 year residential warranty.
- This product is to be laid in accordance with SANS 10070 fitting code of practice.
- Belgotex recommends the use of a 60mm unhooded soft castor, with a 23mm or 38mm diameter, designed for a 60kg loading capacity per a castor. Recommended material is high impact nylon core and hub with soft grey/black PU treads on the wheel.
- GreenTag Level A Gold Rated Certification.

*All product names and logos are trademarks of BELGOTEX FLOORCOVERINGS® (Pty) Ltd. © BELGOTEX FLOORCOVERINGS® (Pty) Ltd. All rights reserved. Warranty and guarantee to limitations and conditions. For details contact BELGOTEX FLOORCOVERINGS® (Pty) Ltd.