

Spin 3


Make your power outlet EV-charging compatible





Take total control over your charging

Spin home chargers offer you complete convenience and full control over your EV charging. Install a charger at home or carry one in the car with you – whatever you choose, you're in charge.

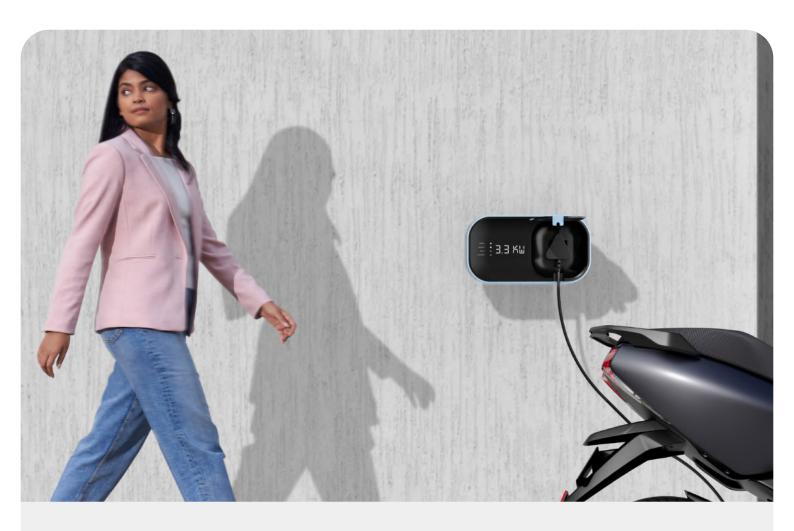

Everything you might be asking for

- + Lockable cover prevents tampering
- + Durable and weatherproof
- + Compatible with regional plugs
- + Charge with customers' own cables
- + IP54 rating water resistant
- + Fully operable up to 55°C
- + Bharat standard AC-001 compliant
- + WiFi and 4G for remote control and monitoring
- + Intuitive status display
- + OCPP 1.6J remote management

Why Spin?



Warranty

Comprehensive extended warranty and service plans provide complete peace of mind.



Convenience

Plug in right as you get home. Start charging immediately, or schedule for later.



Support

We're here to give you best-in-class support so your chargers are up and running every time you need them.

Spin Control App

One App, Full Control

Tap to start, tap to stop. Simple. Full monitoring and control of your charger from anywhere.


Spin Care

Service and support from the people that know your charger best Service and support from the people that know your charger best. Available directly through the Spin Control App.

Available On All devices





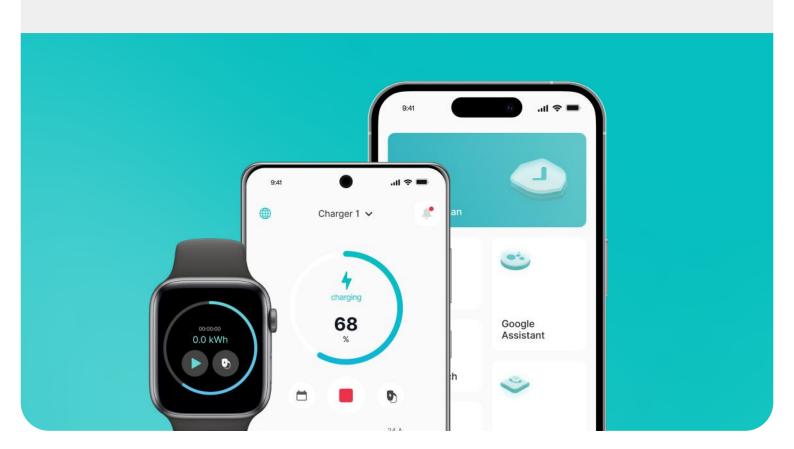

Specifications



Power Output Charging Power: 3.3 kW

AC Output: 150 - 150 - 270 Vac

Connection point: Socket - IS 1293 (BS 546 type M)

Mode of Charging: Mode-1

Mains Input Voltage (nominal): 220/230/240 VAC (nom)

Input Voltage Range: 150 - 270 Vac

Network Connection: TN-S
AC Wiring: 1 Phase / L1, N, PE
Input Frequency (nominal): 50 Hz
Input Frequency Range: 48.5 - 51.5 Hz

Leakage Current: < 3.5 mA

Standby Power @ nom. voltage: < 10 W

Protection and Safety Di-electric strength test: 4,000 Vac (common mode) or 2,500 Vac (differential)

Impulse Di-electric Withstand (1.2/50us): 6,000 Vac (common mode) or 4,000 Vac (differential)

Insulated Test between isolated terminals: R>100Mohm

Over Voltage Category: III

Others: Over Current, Under/Over Voltage, Over Temperature, Gnd-N Voltage, Residual Current

User Interface and Comms

Charge Option / User Authentication: Auto start, via Spin Control mobile app. or 3rd party CMS

Connectivity Options: Bluetooth or Internet access via WIFI
Display (option): Automotive Style LED cluster (100mm x 40mm)
Visual Indication (LED): Presence of Supply, State of Charging, Error
Communication EVSE and CMS server: OCPP V 1.6 J (JSON)

Energy Metering: Integrated

Configuration Software update: OTA (Over The Air)

Control, Set-up & Monitoring: OCPP v1.6j

Mechanical Ingress Protection: IP 54 (Outdoor environment)

Impact Resistance: IK10 acc. IEC 62262 Dimension (H*W*D): 260 * 130 * 120 mm

Weight: 2.5 kg approx. (inc cable)

Material: Polycarbonate + ABS (UL94-V0)

Mounting: Pedestal Stand or Wall

Cooling: Natural Air

Specifications



Environmental Operating Temperature: -25°C to 55°C (full power)

Storage Temperature: –20°C to 70°C

Altitude: 2,000 meters (de-rating above 2,000 meters)

Humidity (Non-Condensing): 5% to 95%

Standards / Certification

Safety: Bharat ACEV 001 EMC: Bharat ACEV 001 THIS DOCUMENT CONTAINS INFORMATION THAT IS SUBJECT TO CHANGE WITHOUT NOTICE.

No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including, but not limited to, copying, recording, retrieving data, or computer networks without the written permission of Exicom.

Exicom and all other Exicom product names and slogans are trademarks or registered trademarks of Exicom. Exicom products can be protected by one or more patents.

All other products and services mentioned may be trademarks or service marks of their respective owners.

Illustrations of the product and user interface are exemplary and may differ from the actual appearance.

October 2022 - Version 1

© 2022 by Exicom. All rights reserved



Scan for Digital Brochure



EV chargers for homes and businesses

Exicom is distributed and maintained by a network of qualified partners and resellers.

Find more information and your local partner at: