




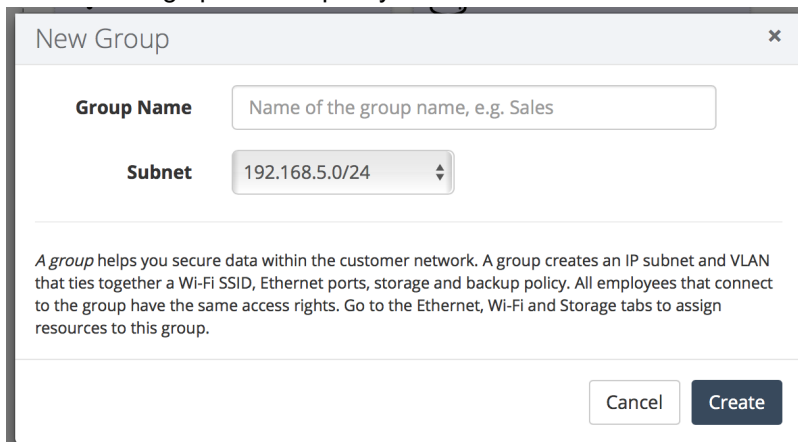
Configuring VLAN's on the Uplevel 2.2 Release

Overview:

The Uplevel Release 2.2 has a new look to creating and configuring VLAN's. This means you will now easily be able to easily configure the groups resources the same way you will also edit them after the fact. Previously creating and configuring the groups used a different process than editing the resources after the fact.

Configuration:

To create a new VLAN you will ensure the "Enable Multiple Groups" checkbox is checked located at the very bottom of the Overview Page. This will present a  button. Clicking this Add Group button will present you with the following options to specify the name of the new VLAN.

A screenshot of a "New Group" dialog box. The dialog has a title bar with "New Group" and a close button. It contains two input fields: "Group Name" with a text input field containing the placeholder "Name of the group name, e.g. Sales", and "Subnet" with a dropdown menu showing "192.168.5.0/24". Below the fields is a paragraph of explanatory text: "A group helps you secure data within the customer network. A group creates an IP subnet and VLAN that ties together a Wi-Fi SSID, Ethernet ports, storage and backup policy. All employees that connect to the group have the same access rights. Go to the Ethernet, Wi-Fi and Storage tabs to assign resources to this group." At the bottom right are "Cancel" and "Create" buttons.

New Group

Group Name

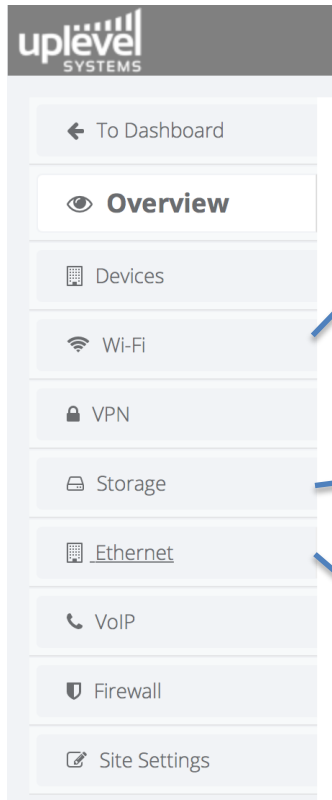
Subnet

A group helps you secure data within the customer network. A group creates an IP subnet and VLAN that ties together a Wi-Fi SSID, Ethernet ports, storage and backup policy. All employees that connect to the group have the same access rights. Go to the Ethernet, Wi-Fi and Storage tabs to assign resources to this group.

Here you will input the desired name of the VLAN as the group name and can specify the subnet.

To configure the VLAN and assign it resources you will use the left hand pane to configure Wi-Fi, Storage, and Ethernet ports.

uplevel SYSTEMS



To add new SSID's select the "Click here to add Wi-Fi SSID" for Corporate access or "Enable Guest Wi-Fi" to enable Guest access, or select the + button to add additional SSID's. Here you will select from a drop down menu the Group (VLAN) you would like to associate the SSID with.

To partition off a new storage drive select "Click here to add a storage drive" or the + button. This will allow you to give the drive a name, size, and select from a drop down menu the Group (VLAN) you would like to associate the Drive with.

To allocate any of the available ports on the gateway to a specific group select "Edit" in the top right corner of the page. This will present you with a drop down menu for each Ethernet port on the gateway or any connected Switches.