# AGRICUS ACCESSORIES

2022 MID ATLANTIC







# Agriculture Hoses & Couplings



# Index

Agricultural Solution and Tree Spraying  PVC/Polyurethane Blend Reinforced Spray Hoses	2
Water Transfer & Agricultural Solution Spraying Clear and White PVC Suction Hose	4
Water Discharge & Drip Irrigation  TIPCO GLO 801 Atlantic Clear and White PVC	
Water & Irrigation Supply Lines OROFLEX® 10 PVC/Nitrile Rubber	
Water & Concentrated Agricultural Solution Hoses  TIPCO GL0913 Chesapeake	All Solution Spraying  I Solut
<b>Grain and Material Handling</b> Hose Tec® Stainless Steel Transfer Hose Assemblies	7
Food Grade Liquid Tranfer Hoses  TIPCO Clearbraid Food and Beverage Hoses	
Banjo Part A Male Adapter x Female NPT.  Banjo Part B Female Coupler x Male NPT  Banjo Part C Female Coupler x Hose Shank  Banjo Part D Female Coupler x Female NPT  Banjo Part E Male Adapter x Hose Shank  Banjo Part F Male Adapter x Male NPT  Banjo Part DC Dust Cap  Banjo Part DP Dust Plug  Banjo Polypropylene Ball Valve 4-Bolt Design  Banjo Polypropylene Ball Valve 6-Bolt Design	9 10 10 11
Combination Hose Nipples         Hose Nipple (Plain Steel) NPT Threads	
Hose Clamps Stainless Steel T-Bolt Clamps	13



# **Agricultural Solution & Tree Spraying**

#### Kuri Tec® Polyethylene/Rubber Blend High Pressure **Reinforced Spray Hose**

Construction: LLDPE/rubber blend tube, two-pass high tensile strength yarn and rubber blend cover.

**Temperature Range:**  $-40^{\circ}F$  ( $-40^{\circ}C$ ) to  $+130^{\circ}F$  ( $+54^{\circ}C$ )

Typical Application: Transfer of water based/PGR agricultural chemicals

Part Number	Hose Inner Diameter (in)	Length (ft)	Working Pressure (psi) at 68°F
KUR A4086-06X100	3/8	300/100	800
KUR A4086-08X100	1/2	300/100	800
KUR A4086-16X200	1	200	400



TRUESPRAY"

#### Kuri Tec® PVC/Polyurethane Blend High Pressure Reinforced Spray Hose

Construction: PVC/polyurethane blend tube, two-pass high tensile strength yarn and PVC

**Temperature Range:**  $+15^{\circ}F$  (- $10^{\circ}C$ ) to  $+160^{\circ}F$  (+ $70^{\circ}C$ )

Typical Application: Transfer of diluted oil based agricultural chemicals

Part Number	Hose Inner Diameter (in)	Length (ft)	Working Pressure (psi) at 68°F
KUR A1687-06X300	3/8	300	800
KUR A1687-08X300	1/2	300	800
KUR A1687-10X300	5/8	300	800
KUR A1687-12	3/4	300	800



#### Kuri Tec® PVC/Polyurethane Blend Reinforced Spray Hose

Construction: PVC/polyurethane blend tube, two-pass high tensile strength yarn and PVC cover.

**Temperature Range:**  $+15^{\circ}F$  (- $10^{\circ}C$ ) to  $+160^{\circ}F$  (+ $70^{\circ}C$ )

Typical Application: Transfer of dilute oil based agricultural chemicals

Part Number	Hose Inner Diameter (in)	Length (ft)	Working Pressure (psi) at 68°F
KUR A1661-06X300	3/8	300	600
KUR A1661-08X300	1/2	300	600
KUR A1661-10X300	5/8	300	600
KUR A1661-12X300	3/4	300	600





# **Agricultural Solution & Tree Spraying**

#### General Purpose Air & Water Hose

**Construction:** EPDM tube and cover with high tensile strength yarn

**Temperature Range:**  $-40^{\circ}$ F ( $-40^{\circ}$ C) to  $+200^{\circ}$ F ( $+93^{\circ}$ C)

Typical Application: Air/Water and General Purpose Agricultural Spray





Part Number	Color	Hose Inner Diameter (in)	Length (ft)	Working Pressure (psi) at 68°F
TIPCO BGP 1/4INX200 PSI	Black	1/4	500	200
TIPCO BGP 3/8INX200 PSI	Black	3/8	500	200
TIPCO BGP 1/2INX200 PSI	Black	1/2	500	200
TIPCO BGP 5/8INX200 PSI	Black	5/8	500	200
TIPCO BGP 3/4INX200 PSI	Black	3/4	500	200
TIPCO BGP 1INX200 PSI	Black	1	450	200
TIPCO BGP 1-1/4INX200 PSI	Black	1-1/4	50	200
TIPCO BGP 1-1/2INX200 PSI	Black	1-1/2	50	200
TIPCO BGP 2INX200 PSI	Black	2	50	200
TIPCO RGP 1/2INX200 PSI	Red	1/2	500	200
TIPCO RGP 5/8INX200 PSI	Red	5/8	500	200
TIPCO RGP 3/4INX200 PSI	Red	3/4	500	200
TIPCO RGP 1INX200 PSI	Red	1	450	200
TIPCO RGP 1-1/4INX200 PSI	Red	1-1/4	50	200
TIPCO RGP 1-1/2INX200 PSI	Red	1-1/2	50	200
TIPCO RGP 2INX200 PSI	Red	2	50	200
TIPCO RGP 1/4INX300 PSI	Red	1/4	500	300
TIPCO RGP 3/8INX300 PSI RLS	Red	3/8	500	300
TIPCO RGP 1/2INX300 PSI	Red	1/2	500	300
TIPCO RGP 5/8INX300 PSI	Red	5/8	500	300
TIPCO RGP 3/4INX300 PSI	Red	3/4	500	300



# Water Transfer & Agricultural Solution Spraying

#### TIPCO GLO 901 Susquehanna Clear and White PVC Suction Hose

Construction: PVC tube with rigid PVC helix

**Temperature Range:**  $-4^{\circ}F$  ( $-20^{\circ}C$ ) to  $+150^{\circ}F$  ( $+65^{\circ}C$ )

Typical Application: Irrigation, liquid fertilizers and air seeder/planter seed lines

Part Number	Hose Inner Diameter (in)	Length (ft)	Working Pressure (psi) at 68°F
GLO 901-075 SUSQUEHANNA	3/4	100	110
GLO 901-100 SUSQUEHANNA	1	100	85
GLO 901-125 SUSQUEHANNA	1-1/4	100	85
GLO 901-150 SUSQUEHANNA	1-1/2	100	70
GLO 901-200 SUSQUEHANNA	2	100	65
GLO 901-250 SUSQUEHANNA	2-1/2	100	65
GLO 901-300 SUSQUEHANNA	3	100	60
GLO 901-400 SUSQUEHANNA	4	100	50
GLO 901-600 SUSQUEHANNA	6	100/20	40



#### Tigerflex™ Blue EPDM (300) Suction Hose

**Construction:** EPDM tube with rigid polyethylene helix **Temperature Range:** -4°F (-20°C) to +150°F (+65°C)

Typical Application: Irrigation, wastewater and liquid fertilizers

Part Number	Hose Inner Diameter (in)	Length (ft)	Working Pressure (psi) at 68°F
300EPDM 1IN	1	100	65
300EPDM 1-1/4IN	1-1/4	100	60
300EPDM 1-1/2IN	1-1/2	100	50
300EPDM 2IN	2	100	50
300EPDM 2-1/2IN	2-1/2	100	45
300EPDM 3IN	3	100	45
300EPDM 4IN	4	100	40
300EPDM 6IN	6	100/20	30



Additional Colors Available







#### Tigerflex™ EPDM (390SD) Suction and Discharge Hose

Construction: EPDM tube and cover, polyester fabric reinforcement and rigid polyethylene helix

**Temperature Range:** -40°F (-40°C) to +160°F (+71°C)

Typical Application: Irrigation, wastewater and liquid fertilizers

Part Number	Hose Inner Diameter (in)	Length (ft)	Working Pressure (psi) at 68°F
390SDBK 1-1/4IN	1-1/4	100	100
390SD 1-1/2IN	1-1/2	100	100
390SD 2IN	2	100	100
390SD 3IN HOSE	3	100	90





# Water Discharge & Drip Irrigation

#### **TIPCO Technologies GLO801 ATLANTIC**

Construction: Spiral homogeneous PVC construction is ideal for irrigation and

agriculture applications, and provides for minimal elongation.

Temperature Range:  $-5^{\circ}F$  ( $-20^{\circ}C$ ) to  $+170^{\circ}F$  ( $+76^{\circ}C$ ) Typical Application: Water transfer and drip irrigation

Part Number	Hose Inner Diameter (in)	Length (ft)	Working Pressure (psi) at 68°F
GLO 801-150 ATLANTIC	1-1/2	300	80
GLO 801-200 ATLANTIC	2	300	80
GLO 801-300 ATLANTIC	3	300	70
GLO 801-400 ATLANTIC	4	300	70
GLO 801-600 ATLANTIC	6	300	50




**Construction:** Spiral homogeneous PVC construction is ideal for agriculture applications and provides for minimal elongation.

**Temperature Range:**  $-5^{\circ}$ F ( $-20^{\circ}$ C) to  $+170^{\circ}$ F ( $+76^{\circ}$ C)

Typical Application: Water transfer

Part Number	Hose Inner Diameter (in)	Length (ft)	Working Pressure (psi) at 68°F
KUR IS200X300	2	300	80
KUR IS300X300	3	300	80
KUR IS600X300	6	300	70
KUR IS800X100	8	100	45

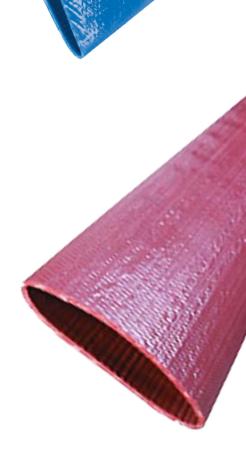



# Water & Irrigation Supply Lines

#### **OROFLEX® 10 PVC/Nitrile Rubber Discharge Hose**

**Construction:** Black PVC/Nitrile hose using an extruded through-the-weave

process with circular woven high tenacity polyester reinforcement.

**Temperature Range:**  $-20^{\circ}F$  ( $-29^{\circ}C$ ) to  $+176^{\circ}F$  ( $+80^{\circ}C$ )

Typical Application: Water transfer

Part Number	Hose Inner Diameter (in)	Length (ft)	Working Pressure (psi) at 68°F
KUR 0F10-150X200	1-1/2	200	203
KUR 0F10-200X200	2	200	203
KUR 0F10-250X200	2-1/2	200	203
KUR 0F10-300X100	3	200/100	174
KUR 0F10-400X100	4	200/100/50	174
KUR 0F10-500X200	5	200	174
KUR 0F10-600X100	6	200/100/50	174
KUR 0F10-800X100	8	100/50	174
KUR 0F10-1000X050/100/200	10	100/50	174
KUR 0F10-1200X050/100/200	12	100/50	116



# **OROFLEX® 20 YELLOW Heavy Duty PVC/Nitrile Rubber** Air & Discharge Hose

**Construction:** Yellow PVC/Nitrile hose using an extruded through-the-weave process with circular woven high tenacity polyester reinforcement.

**Temperature Range:** -20°F (-29°C) to +176°F (+80°C)

Typical Application: Agricultural, water transfer, air compressors

Part Number	Hose Inner Diameter (in)	Length (ft)	Working Pressure (psi) at 68°F
KUR 0F20Y-075X050	3/4	200/50	483
KUR 0F20Y-100X200	1	200/50	556
KUR 0F20Y-200X200	2	200	302
KUR 0F20Y-300X200	3	200	261
KUR 0F20Y-400X200	4	200	302
KUR 0F20Y-600X200	6	100	290





# Water & Concentrated Agricultural Solution Hoses

#### TIPCO Technologies GLO913 Chesapeake Heavy Duty Rubber Suction & Discharge Hose

Construction: EPDM tube with high tensile strength textile cords and steel helix wires

**Temperature Range:**  $-40^{\circ}$ F ( $-40^{\circ}$ C) to  $+212^{\circ}$ F ( $+100^{\circ}$ C)

Typical Application: Agriculture, construction, contractors, irrigation, and rental industries

#### **T-FLEX 913 CHESAPEAKE WATER**





Part Number	Hose Inner Diameter (in)	Length (ft)	Working Pressure (psi) at 68°F
GLO 913-100 T-FLEX CHESAPEAKE	1	100	150
GLO 913-125 T-FLEX CHESAPEAKE	1-1/4	100	150
GLO 913-150 T-FLEX CHESAPEAKE	1-1/2	100	150
GLO 913-200 T-FLEX CHESAPEAKE	2	100	150
GLO 913-250 T-FLEX CHESAPEAKE	2-1/2	100	150
GLO 913-300 T-FLEX CHESAPEAKE	3	100	150
GLO 913-400 T-FLEX CHESAPEAKE	4	100	150
GLO 913-600 T-FLEX CHESAPEAKE	6	100	150
GLO 913-800 T-FLEX CHESAPEAKE	8	100	150
GLO 913-1200 T-FLEX CHESAPEAKE	12	100	150

# **Grain and Material Handling**

# Hose Tec® Stainless Steel, Unlined Bulk Material Transfer Hose Assemblies


**Construction:** EPDM tube with high tensile strength textile cords and

steel helix wires (Maximum Service) **Temperature Range:** +1500°F (+815°C)

Hose Ends: Male NPT

Typical Application: Bulk truck and railcar unloading, heavy duty

material handling

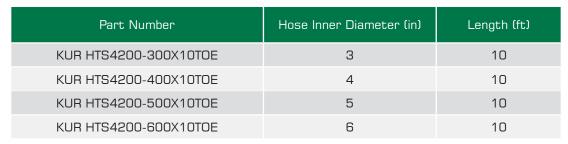





# Food Grade Liquid Transfer Hoses


#### TIPCO Clearbraid Food & Beverage Hose

Construction: PVC tube and cover with high tensile strength yarn.

**Temperature Range:**  $+25^{\circ}F$  ( $-4^{\circ}C$ ) to  $+150^{\circ}F$  ( $+65^{\circ}C$ )

Typical Application: Liquid transfer

Part Number	Tube Inner Diameter (in)	Length (ft)	Working Pressure (psi) at 70°F
TIPCO RVT-1/4IN	1/4	300	250
TIPCO RVT-3/8IN	3/8	300	225
TIPCO RVT-1/2IN	1/2	300	200
TIPCO RVT-5/8IN	5/8	300	200
TIPCO RVT-3/4IN	3/4	300	150
TIPCO RVT-1IN	1	300	125
TIPCO RVT-1.25IN	1-1/4	300	100
TIPCO RVT-1.5IN	1-1/2	300	100
TIPCO RVT-2IN	2	300	75




#### Clear PVC Tubing

Construction: PVC Tube Compliances: FDA, RoHS

**Temperature Range:**  $+25^{\circ}F$  ( $-4^{\circ}C$ ) to  $+150^{\circ}F$  ( $+65^{\circ}C$ ) **Typical Application:** Liquid transfer and seed delivery

Part Number	Tubing Inner Diameter (in)	Tube Inner Diameter (in)	Length (ft)	Working Pressure (psi) at 70°F
TIPCO CVT-1/8INX1/4IN	1/8	1/4	100	65
TIPCO CVT-3/16INX5/16IN	3/16	5/16	100	55
TIPCO CVT-1/4INX3/8IN	1/4	3/8	100	55
TIPCO CVT-1/4INX1/2IN	1/4	1/2	100	60
TIPCO CVT-5/16INX7/16IN	5/16	7/16	100	50
TIPCO CVT-3/8INX1/2IN	3/8	1/2	100	45
TIPCO CVT-3/8INX5/8IN	3/8	5/8	100	55
TIPCO CVT-1/2INX5/8IN	1/2	5/8	100	30
TIPCO CVT-1/2INX3/4IN	1/2	3/4	100	45
TIPCO CVT-5/8INX7/8IN	5/8	7/8	100	40
TIPCO CVT-3/4INX1IN	3/4	1	100	35
TIPCO CVT-7/8INX1.125IN	7/8	1-1/8	100	30
TIPCO CVT-1INX1.25IN	1	1-1/4	100	25
TIPCO CVT-1.25INX1.5IN	1-1/4	1-1/2	50	20
TIPCO CVT-1.5INX2IN	1-1/2	2	50	35

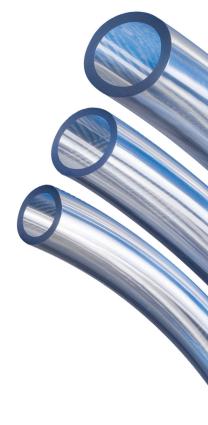



# **Couplings**

#### Genuine Banjo Part A Male Adapter x Female NPT

Part Number	Adapter Size (in)	NPT Size (in)	Working Pressure (PSI)
BAN 100A	1	1	300
BAN 125A	1	1-1/4	300
BAN 150A	1-1/2	1-1/2	225
BAN 200A	2	2	225
BAN 300A	3	3	100



#### Genuine Banjo Part B Female Coupler x Male NPT

Part Number	Coupler Size (in)	NPT Size (in)	Working Pressure (PSI)
BAN 100B	1	1	300
BAN 125B	1	1-1/4	300
BAN 150B	1-1/2	1-1/2	300
BAN 200B	2	2	225
BAN 300B	3	3	150





### Genuine Banjo Part C Female Coupler x Hose Shank

Part Number	Coupler Size (in)	Hose Shank Size (in)	Working Pressure (PSI)
BAN 100C	1	1	300
BAN 125C	1	1-1/4	300
BAN 150C	1-1/2	1-1/2	225
BAN 200C	2	2	225
BAN 300C	3	3	100





# **Couplings**

#### Genuine Banjo Part D Female Coupler x Female NPT

Part Number	Coupler Size (in)	NPT Size (in)	Working Pressure (PSI)
BAN 075D	3/4	3/4	300
BAN 100D	1	1	300
BAN 125D	1-1/4	1-1/4	300
BAN 150D	1-1/2	1-1/2	300
BAN 200D	2	2	200
BAN 300D	3	3	200





#### Genuine Banjo Part E Male Adapter x Hose Shank

Part Number	Adapter Size (in)	Hose Shank Size (in)	Working Pressure (PSI)
BAN 050E	3/4	1/2	300
BAN 100E	1	1	300
BAN 125E	1	1-1/4	300
BAN 150E	1-1/2	1-1/2	200
BAN 200E	2	2	200
BAN 300E	3	3	150



## Genuine Banjo Part F Male Adapter x Male NPT

Part Number	Adapter Size (in)	NPT Size (in)	Working Pressure (PSI)
BAN 075F	3/4	3/4	300
BAN 100F	1	1	300
BAN 125F	1	1-1/4	300
BAN 150F	1-1/2	1-1/2	300
BAN 200F	2	2	300
BAN 300F	3	3	100
BAN 400F	4	4	75





# Couplings & Valves

#### Genuine Banjo Part DC Duct Cap

Part Number	Size (in)	Working Pressure (PSI)
BAN 075CAP	3/4	300
BAN 100125CAP	1	300
BAN 150CAP	1-1/2	300
BAN 200CAP	2	200
BAN 300CAP	3	100



#### Genuine Banjo Part DP Dust Plug

Part Number	Coupler Size (in)	NPT Size (in)	Working Pressure (PSI)
BAN 075PL	3/4	3/4	300
BAN 100125PL	1	1	300
BAN 150PL	1-1/2	1-1/2	225
BAN 200PL	2	2	225
BAN 300PL	3	3	150





#### Genuine Banjo Polypropylene Ball Valve 4-Bolt Design

Part Number	Size (in)	Standard Carton
BAN V050	1/2	6
BAN V075	3/4	12
BAN V100	1	12
BAN V150	1-1/2	6
BAN V200	2	12



#### Genuine Banjo Polypropylene Ball Valve 6-Bolt Design

Part Number	Size (in)	Standard Carton
BAN V300	3	8
BAN V400	4	4



# **Combination Hose Nipples**

#### Hose Nipple (Plain Steel) NPT Threads

Part Number	Size (in)	Standard Carton
DXN ST1	1/2	25
DXN ST5	3/4	25
DXN ST10	1	50
DXN ST15	1-1/4	20
DXN ST20	1-1/2	10
DXN ST25	2	40



#### Hose Nipple (304 Stainless) NPT Threads

Part Number	Size (in)	Standard Carton
DXN RST1	1/2	25
DXN RST5	3/4	25
DXN RST10	1	50
DXN RST15	1-1/4	20
DXN RST20	1-1/2	10
DXN RST25	2	40
DXN RST30	2-1/2	20
DXN RST35	3	12
DXN RST40	4	8







# **Hose Clamps**

# **Stainless Steel T-Bolt Clamps** All 300 Series Stainless Steel T-Bolt Clamps

All 300 Series Stair	nless Steel I-Bo	olt Clamps
Part Number	From (in)	To (in)
STBC200	1.844	2.062
STBC212	1.964	2.182
STBC225	2.094	2.312
STBC238	2.224	2.442
STBC250	2.344	2.562
STBC256	2.362	2.622
STBC263	2.396	2.692
STBC275	2.516	2.812
STBC288	2.646	2.942
STBC300	2.766	3.062
STBC312	2.886	3.182
STBC325	3.016	3.312
STBC350	3.266	3.562
STBC362	3.386	3.682
STBC375	3.516	3.812
STBC382	3.586	3.882
STBC400	3.766	4.062
STBC425	4.016	4.312
STBC450	4.266	4.562
STBC475	4.516	4.812
STBC500	4.766	5.062
STBC525	5.016	5.312
STBC550	5.266	5.562
STBC575	5.516	5.812
STBC600	5.766	6.062
STBC625	6.016	6.312
STBC650	6.266	6.562
STBC675	6.516	6.812
STBC700	6.766	7.062
STBC725	7.016	7.312
STBC750	7.266	7.562
STBC800	7.766	8.062
STBC825	8.016	8.312
STBC850	8.266	8.562



**Center Punch Clamps\*** All 300 Series Stainless Steel T-Bolt Clamps

Part Number	DESCRIPTION
P-8	2" GALV Clamp
P-8-S	2" Stainless Steel Clamp
P-10	2-1/2" GALV Clamp
P-10-S	2-1/2" Stainless Steel Clamp
P-12	3" GALV Clamp
P-12-S	3" Stainless Steel Clamp
P-14	3-1/2" GALV Clamp
P-14-S	3-1/2" Stainless Steel Clamp
P-16	4" GALV Clamp
P-16-S	4" Stainless Steel Clamp
P-18	4-1/2" GALV Clamp
P-18-S	4-1/2" Stainless Steel Clamp
P-20	5" GALV Clamp
P-20-S	5" Stainless Steel Clamp

Part Number	DESCRIPTION
P-1	Locking Tool*





# **Hose Clamps**



#### Stainless Steel Worm Gear Clamps

All 300 Series Stainless Steel Worm Gear Clamps

Part Number	DESCRIPTION
MAH4	1/4" x 5/8" SS Clamp
MAH6	5/16" x 29/32" SS Clamp
HSS6	7/16" x 25/32" SS Clamp
HSS8	7/16" x 29/32" SS Clamp
HSS10	9/16" x 1-1/16" SS Clamp
HSS12	11/16" x 1-1/4" SS Clamp
HSS16	3/4" x 1-1/2" SS Clamp
HSS20	13/16" x 1-3/4" SS Clamp
HSS24	1-1/16" x 2" SS Clamp
HSS28	1-5/16" x 2-1/4" SS Clamp
HSS32	1-9/16" x 2-1/2" SS Clamp
HSS36	1-1/2" x 2-3/4" SS Clamp
HSS40	1-3/4" x 3" SS Clamp
HSS44	2" x 3-1/4" SS Clamp
HSS48	2-1/4" x 3-1/2" SS Clamp
HSS52	2-1/2" x 3-3/4" SS Clamp
HSS56	2-3/4" x 4" SS Clamp
HSS60	3" x 4-1/4" SS Clamp
HSS64	3-1/4" x 4-1/2" SS Clamp
HSS72	3-3/4" x 5" SS Clamp
HSS80	4-9/16" x 5-1/2" SS Clamp
HSS88	4-3/4" x 6" SS Clamp
HSS96	5-1/4" x 6-1/2" SS Clamp
HSS104	5-3/4" x 7" SS Clamp
HSS116	6-1/2" x 7-3/4" SS Clamp





# The TIPCO eStore has more than just online ordering.

- Shop based on your Customer-Specific Pricin
- View Live Inventory Across all TIPCO locations
- View Spec Data and item images
- · View Open Orders
- View Order History
- Create Custom Catalogs
- View Invoice History
- Pay Invoices Online
- Request Quotes

Bring the Hose Center to your fingertip on **shop.tipcotech.com!** 

# TIPCO Express Hose Center Near You



The TIPCO Technologies Aeroquip Hose Centers in Maryland, Virginia, Delaware, New Jersey, and Pennsylvania are your one-stop locations for all of your hydraulic hose and fitting needs.

#### Headquarters

11412 Cronhill Dr.
Owings Mills, MD 21117
Ph: 410-356-0003
Fax: 410-363-2864

#### Glen Burnie, MD

703 East Ordnance Rd. Suites 608-609 Glen Burnie, MD 21226 Ph: 443-400-8480 Fax: 443-400-8487

#### Frederick, MD

4635 Wedgewood Blvd. Suite 102 Frederick, MD 21703 Ph: 301-831-4193 Fax: 301-620-4158

#### Fredericksburg, VA

4124 Lafayette Blvd Fredericksburg VA 22408 Ph: 540-369-6520 Fax: 540-940-2376

#### Chantilly, VA

14140-Q Parke Long Ct. Chantilly, VA 20151 Ph: 703-222-0354 Fax: 703-222-3626

#### Chester, VA

1511 W. Hundred Rd. Chester, VA 23836 Ph: 804-706-6671 Fax: 804-706-6673

#### Lynchburg, VA

2105-B Graves Mill Rd. Forest, VA 24551 Ph: 434-385-1615 Fax: 434-385-4793

#### Manassas, VA

9501 Discovery Blvd Manassas, VA 20109 Ph: 703-436-3000 Fax: 703-436-3007

#### Bear, DE

700 Carson Drive, Suite 705 Bear, DE 19701 Ph: 302-838-1392 Fax: 302-838-1396

#### Vineland, NJ

1880 N. Delsea Dr. Vineland, NJ 08360 Ph: 856-839-4433 Fax: 856-358-0802

#### Hanover, PA

1185 High Street Units 1-2 Hanover, PA 17331 Ph: 223-400-4646



sales@tipcotec.com - www.tipcotech.com



Shop online at: www.shop.tipcotech.com