

YELLOWSTONE BULK

Bulk Aqueous Cartridge

Key Specifications

- Up to 1/4" (6mm) throw distance*
- Bulk-use
- Single-color
- Water-based inks
- 1/2" (13.5mm) print swath
- 600 DPI
- Drop mass: 22pl*
- Up to 1L yield*
- 24 kHz effective (12 kHz per nozzle)*

Key Applications

- Primary package coding
- Secondary case/tray coding
- Mailing/Addressing
- Variable data coding (lot/expiration)
- Other porous substrates

About

Yellowstone Bulk is a bulk monochrome aqueous industrial cartridge with 640 nozzles and a 1/2" print swath. With an effective 24kHz printing speed, Yellowstone Bulk nearly doubles the speed and/or resolution of the competition. Common uses include text, barcodes, and graphics on porous and semi-porous substrates.




The cartridge design features long open times with aqueous inks while ensuring a low cost of operation. On chip READ/WRITE memory ensures that only approved inks are utilized in OEM partner machines.

Target Customer

The ideal customer:

- Requires water-based ink formulation
- Runs medium-to-large production batches or multiple shifts (24/7)
- Utilizes porous and semi-porous substrates

Print Speed Table

12 kHz Print Speed Translation			
Horizontal DPI	Max. Line Speed* (Single Channel)	Max. Line Speed* (Dual Channel)	Sample Print Image (Simulated)
300	200 ft/min (~61 m/min)	400 ft/min (~122 m/min)	 1 234567 890128 Funai 300 DPI Printing
150	400 ft/min (~122 m/min)	800 ft/min (~244 m/min)	 1 234567 890128 Funai 150 DPI Printing
75	800 ft/min (~244 m/min)	1,600 ft/min (~490 m/min)	 1 234567 890128 Funai 75 DPI Printing

Contact Us

Funai Microfluidic Solutions
 700 Setzer Way
 Lexington, KY USA 40508-1187
 +1(859)550-2070
contactus@funaisolutions.com
www.funaisolutions.com

Powered By Funai

Funai focuses on research and development of thermal inkjet microfluidics for specialty printing, life sciences, and consumer applications. With hundreds of printing-related patents, Funai is recognized as a top-tier microfluidic designer and manufacturer with scaling capabilities to partner with global industries.



*Fluid Dependent

YELLOWSTONE BULK

Bulk Aqueous & Light Solvent Cartridge

About





Model	Funai Model No: A2**UA, A2**EU	
Environmental Protection	RoHS / REACH	
Printable Images	Text Barcodes Graphics	
Ink Capacity	Ink fill (avg) 17ml Deliverable ink (avg) Up to 1L*	
Nozzles	640 (two rows of 320)	
Heater Pitch	600 DPI	
Print Swath	0.532" (13.5mm)	
Firing Frequency	12 kHz per nozzle*	
Pen Stall	Shetland/Clydesdale	
Nozzle Sealing Method	Nozzle Clip	
Reservoir Type	Bladder	
Tubing Connector Size	1/8" (~3.2mm) ID	

Usage

Working Location	Indoor	
Working Temperature	15C-35C (~60F-95F)	
Working Humidity	8%-80% (non-condensing)	
Compatible Solvents	Aqueous or Light Solvent <20% Ethanol	
Ink Properties	PH 7-8 Surface Tension (dynes/cm) 24-45 Viscosity (cP) 2-10 Particle Size (nm) 111.00	
Filling Method	Vacuum Filler (LOBOZAR TECHNIK)	
Drop Size	22pl*	

Dimensions and Storage

Size(mm)	28.8(W) x 73.9(H) x 73.7(D)	
Weight	41g	
Storage Temperature (empty)	15C~50C (~60F-120F)	
Storage Temperature (filled)	15C~35C (~60F-95F)	
Storage Humidity (filled)	5%-80% (non-condensing)	
ATM Pressure	<1609 (~5280ft)	
Shelf Life (Empty)	12 Months	

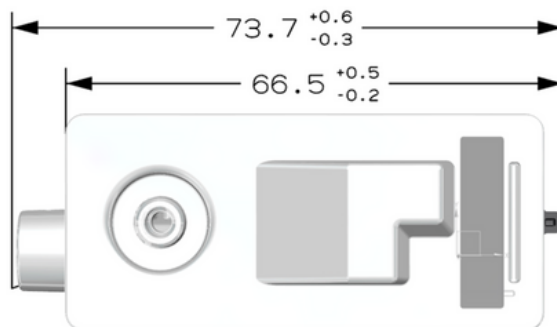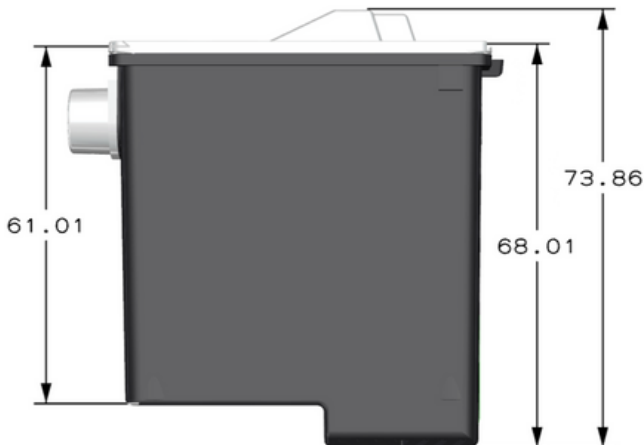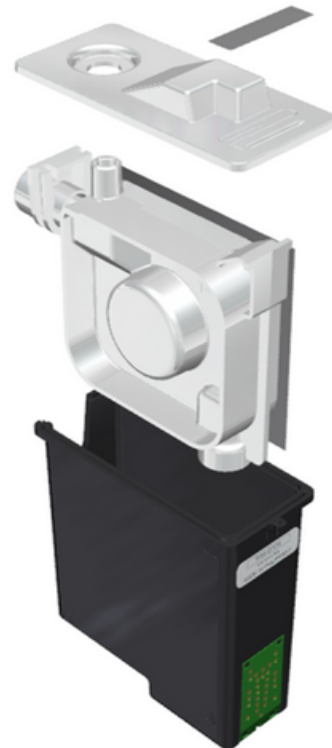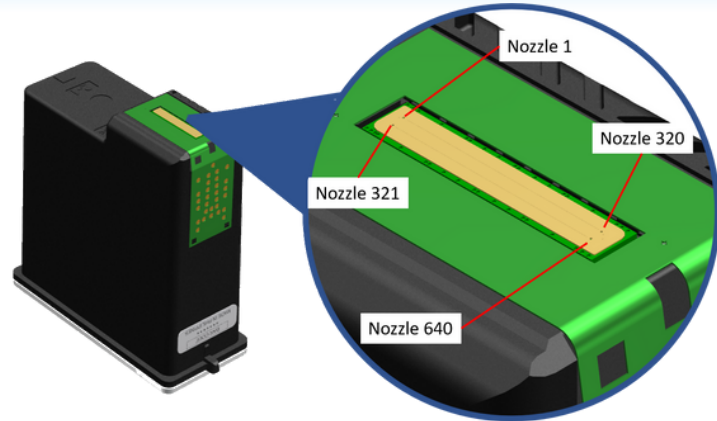

*Fluid Dependent

