

HOW TO

TRANWRD

USING SAS

What is it?

REPLACES ALL OCCURRENCES
OF A SUBSTRING
WITHIN A TEXT
STRING

How do i write it?

TRANWRD

TEXT
STRING

TARGET
SUBSTRING

REPLACEMENT
SUBSTRING

Show me examples

```
tranwrđ(text, 'Mr ', ',')  
= Sam @ OptimalBI
```

```
tranwrđ(text, '@', 'at')  
= Mr Sam at OptimalBI
```


```
tranwrđ(text, 'Sam', 'Shane')  
= Mr Shane @ OptimalBI
```

```
tranwrđ(text, ', ', ',')  
= Mr Sam @ OptimalBI
```

text =
"Mr Sam @ OptimalBI"

What are my options?

- There are no further options for this function.
- Tranwrđ uses a single blank if the replacement substring has a length of zero.
- Tranwrđ is case sensitive.

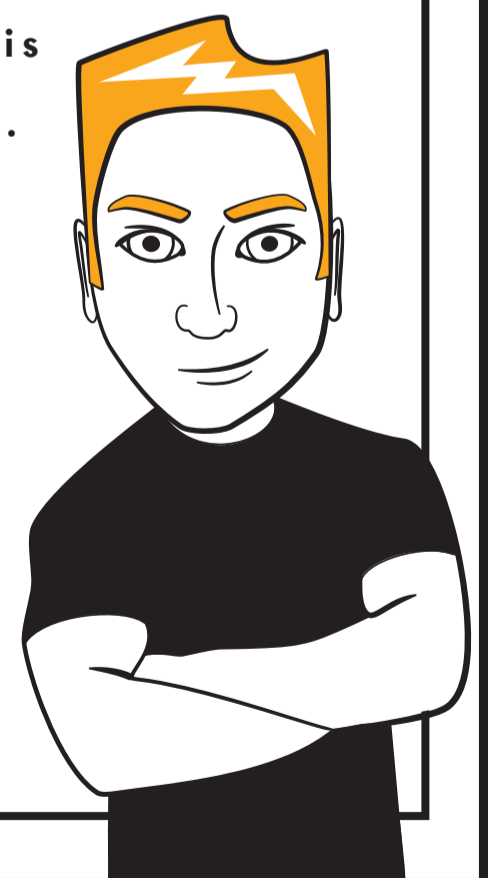

OPTIMAL

BUSINESS
INTELLIGENCE

Visit us at Optimalbi.com

We Do Cool Sh!t With Data