


Ubas D - ROV Basket

Ubas Multifunctional Subsea ROV Basket System

Doc. No.: IN-UDE-180-DS-004, Rev. 03 (8 May 2023)

The **Ubas Type D - ROV Basket** is a **lightweight, high load capacity ROV Basket** available on **Rental** basis.

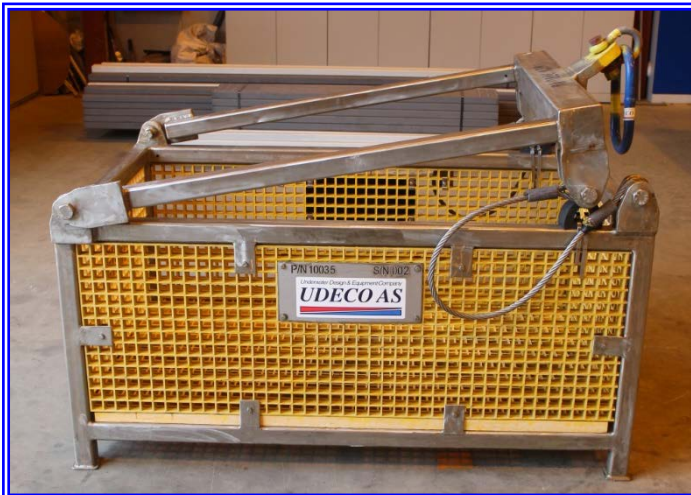


Construction & Certification

- High Load Capacity – Max Gross 3.7Mt, Payload 3.55Mt, Tara 0.15Mt.
- Load tested and certified according to DnV 2.7-1.
- Made from stainless profiles, plates, and glass fibre grating.
- External Size– 1.7m x 1.0m x 1.2m (W x D x H)
Internal Size – 1.58m x 0.88 x 0.6m (W x D x H).

Features

- Hinged spreader arm that provides a single lift point. When slacked off the arm is laid down and makes the basket internals easily accessible for the ROV.
- GRP grating allows free passage of seawater through floor and walls. The GRP grating also reduces seabed suction effects.
- Designed for onshore handling by forklift and road transportation.
- For easy disconnection and re-connection of any deployment wire with ROV hook, an 8.5 Mt shackle and a 17.1 Mt master link are provided.
- Limited deck space requirement, and among other, suitable as Drilling Rig Baskets where normally smaller items are being deployed and retrieved.
- In the case of Electrical and/or Optical Flying Lead Deployment and Installation the basket is equipped with electrical / optical connector parking receptacles, cable strapping plates and relevant marking. One or two flying leads can be deployed in the basket. Typical lengths are 85m (one FL) and 2 x 42m (two FL's.)

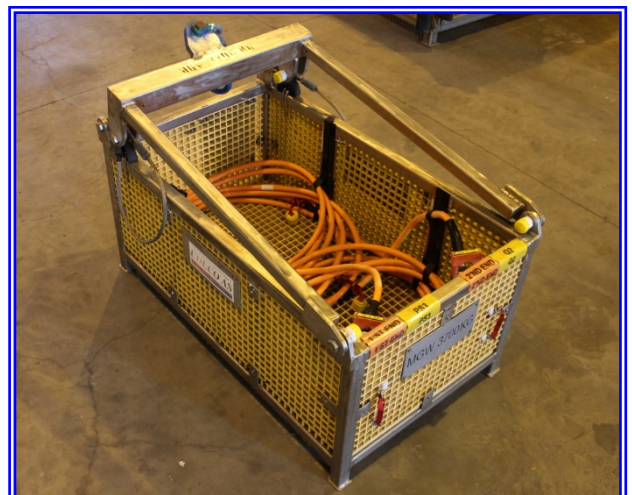

Contacts

Udeco AS
Mekjarvik 2
N-4072 Randaberg, Norway
Switchboard: + 47 51 41 61 00
E-Mail: postmaster@udeco.no
Web: <http://www.udeco.no>