



# HYDROTAP G5 B ELITE PLUS CHROME



**BOILING**

**FILTERED**

## Order Code H5E786Z00AU

Zip HydroTap Design Range Boiling, Filtered water system features a single under bench command centre including full colour interactive touch screen display with pin code protection and customisable settings including boiling water safety mode, 2 energy saving modes including ON/OFF timers and 2 hour sleep mode, SteriTouch® antimicrobial protection impregnated into key water paths for enhanced hygiene, and 0.2 micron water filtration.



Manufacturing Code	H5E786Z00AU
Capacity	Residential





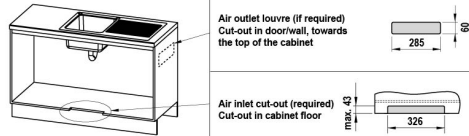
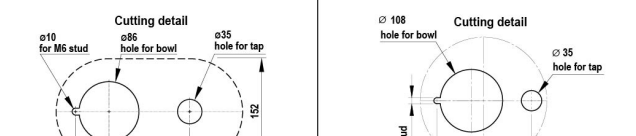
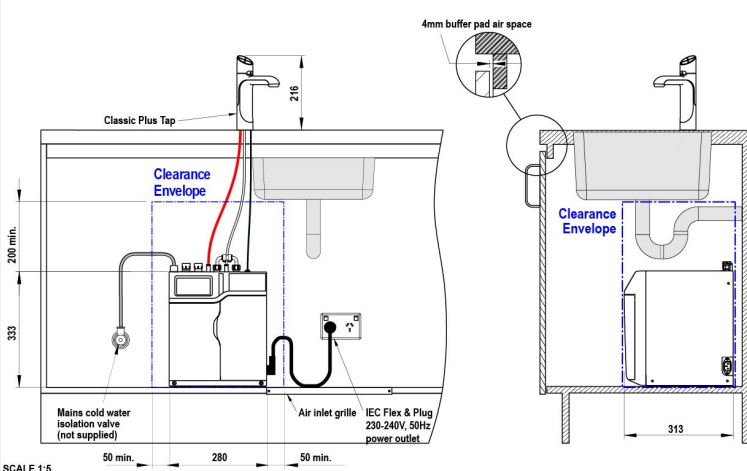
<b>Tap</b>	Zip HydroTap Design Range ELITE PLUS Tap (Chrome)
<b>Water Pressure</b>	Min 250kPa - Max 700kPa
<b>Water Connection</b>	1/2" BSP (G1/2)
<b>Water Supply Requirements</b>	Cold
<b>Water Valves</b>	Integrated 500kPa Pressure limiting valve and Dual Check Valve
<b>Power Rating</b>	1.35kW 220-240V 50Hz
<b>Power Supply</b>	1 x 10 Amp socket outlet
<b>Dimensions</b>	W280mm x D313mm x H333mm
<b>Product Approvals</b>	WaterMark, RCM, ARC
<b>Warranty</b>	5 years (appliance warranty 36 months plus additional 24 months tank warranty)

# Installation Requirements

1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.
2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1.5 metres of the product.
3. HydroTap is air-cooled so discrete cabinetry cut-outs are required for ventilation.
4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.
5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit.
6. Installation by Zip Professional Service can be arranged with a phone call or through [www.zipwater.com](http://www.zipwater.com)

## Installation Detail

BKL2 HydroTap G5 v1.00 02.21 B, BA

Ventilation requirements <small>contact your local service provider if ventilation is not suitable</small>	HydroTap Tap options	Font options	
<p><b>Clearance envelope</b> Position the Tap and the Command Centre as close together as possible.</p>  <p>200 333 50 Command Centre width 50</p>	<p><b>HydroTap Tap options</b></p> <p>Classic Plus Elite Plus</p>  <p>116 110 216 221 128 135 ∅46 ∅46</p>	<p><b>Font options</b></p> <p><b>Raised Font with 135mm Extension</b></p>  <p>116 ∅46 260 351 116 268 20</p> <p><b>Font with 135mm Extension</b></p>  <p>116 ∅46 260 351 104 ∅219 6</p>	
 <p>Air outlet louvre (if required) Cut-out in door/wall, towards the top of the cabinet</p> <p>Air inlet cut-out (required) Cut-out in cabinet floor</p> <p>285 60 max. 40 326</p>	<p><b>Tap Positioning</b> Position the Tap to dispense into the sink, allowing clearance for a cup or teapot. Alternatively, mount the HydroTap Tap on a Font (available as an accessory).</p> <p>∅35mm hole for HydroTap Tap</p> <p>Sink</p> <p><b>Cutting detail</b></p>  <p>∅10 for M6 stud ∅85 hole for bowl ∅35 hole for tap 116 164 162</p> <p>∅108 hole for bowl ∅35 hole for tap ∅10 for M6 stud 60 104 ∅219</p>		
 <p>Classic Plus Tap</p> <p>Clearance Envelope</p> <p>200 min. 333</p> <p>Mains cold water isolation valve (not supplied)</p> <p>Air inlet grille IEC Flex &amp; Plug 230-240V, 50Hz power outlet</p> <p>50 min. 280 50 min. 313</p> <p>4mm buffer pad air space</p> <p><b>HydroTap G5 B Home, BA Home</b> shown with "Classic Plus" Tap</p>			

SCALE 1:5  
ALL DIMENSIONS IN MM UNLESS OTHERWISE SPECIFIED. INSTALLATION DIAGRAMS ARE FOR ILLUSTRATIVE PURPOSES ONLY. HOSES ARE NOT SHOWN TO SCALE AND CANNOT BE LENGTHENED.