

CEILING TO WALL TRANSITION DETAIL #2

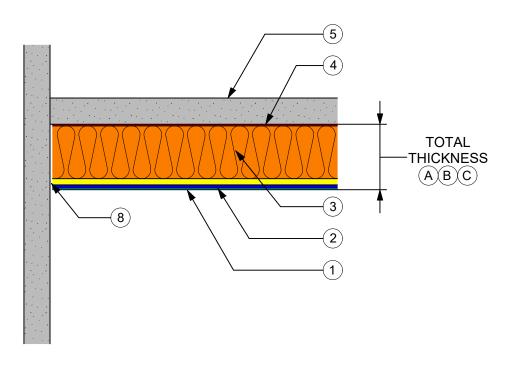

- 1 BASWA Fine
- 2 BASWA Base
- 3 BASWA Pre-Coated Supporting Panel
- 4 BASWA Adhesive
- 5 Stable Substrate
- 8 1/8" Swedish Cut

DIMENSIONS					
SYSTEM A B C					
TOTAL 1 3/16" 1 9/16" 2 3/4" THICKNESS (30MM) (40MM) (70MM)					


FIRE SPRINKLER HEAD DETAIL #3

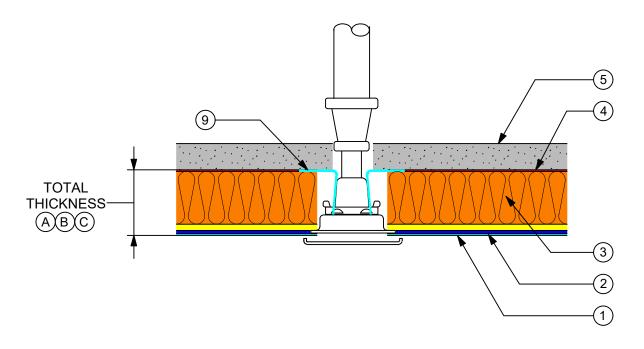

- 1 BASWA Fine
- 2 BASWA Base
- 3 BASWA Pre-Coated Supporting Panel
- 4 BASWA Adhesive
- 5 Stable Substrate
- 9 Adhesive Tape (to prevent air filtration)

DIMENSIONS				
SYSTEM	A	B	C	
TOTAL THICKNESS	1 3/16" (30MM)	1 9/16" (40MM)	2 3/4" (70MM)	
FIXTURE ROUGH-IN BELOW FACE OF SUBSTRATE	1"	1 3/8"	2 9/16"	


**EXPANSION JOINT DETAIL #4** 

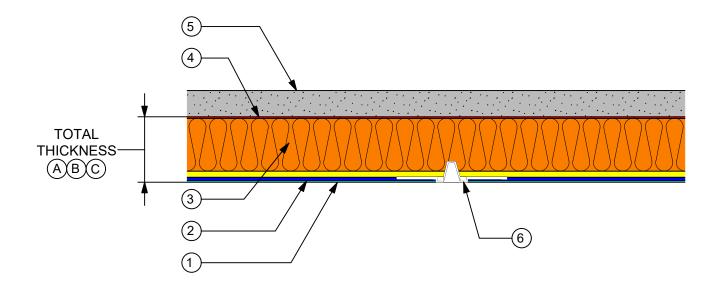

- 1 BASWA Fine
- 2 BASWA Base
- 3 BASWA Pre-Coated Supporting Panel
- 4 BASWA Adhesive
- 5 Stable Substrate
- 6 Vinyl Trim BAS 093V\* Expansion Joint

DIMENSIONS					
SYSTEM A B C					
TOTAL 1 3/16" 1 9/16" 2 3/4" THICKNESS (30MM) (40MM) (70MM)					

<sup>\*</sup>All Vinyl Trims Applied with Trim Tex 847 Spray Adhesive

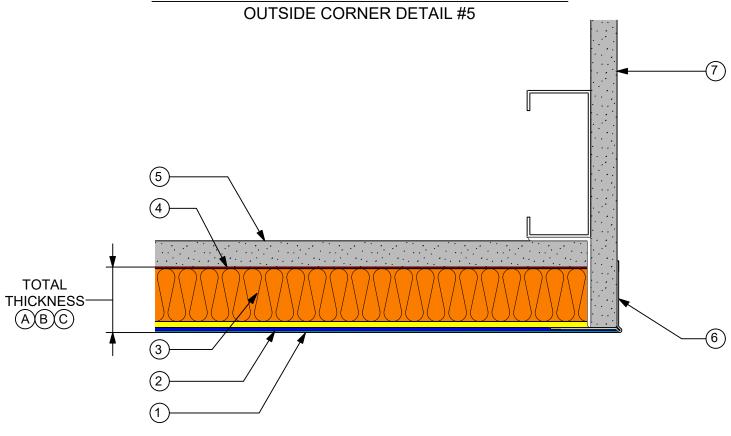


- 1 BASWA Fine
- 2 BASWA Base
- 3 BASWA Pre-Coated Supporting Panel
- 4 BASWA Adhesive
- 5 Stable Substrate
- 6 White Vinyl Trim BAS S010\* Corner Bead
- 7 Drywall Finished and Painted

DIMENSIONS			
SYSTEM	(A)	B	(C)
TOTAL THICKNESS	1 3/16" (30MM)	1 9/16" (40MM)	2 3/4" (70MM)
DRYWALL OVERHANG BELOW FACE OF SUBSTRATE	1"	1 3/8"	2 9/16"

<sup>\*</sup>All Vinyl Trims Applied with Trim Tex 847 Spray Adhesive


RECESSED LIGHT DETAIL #6

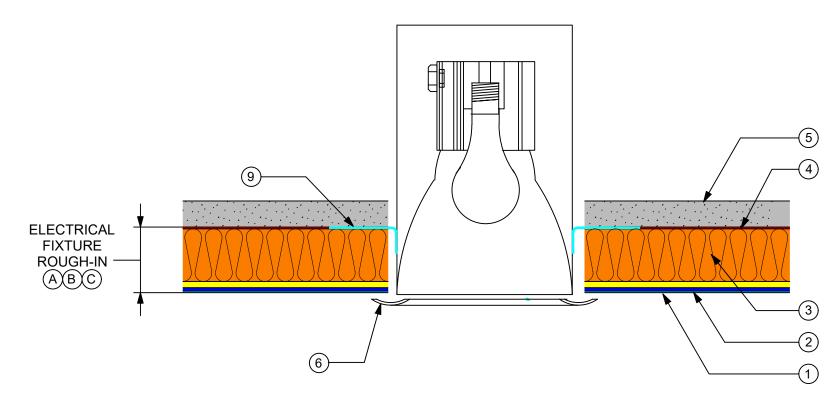

- 1 BASWA Fine
- 2 BASWA Base
- 3 BASWA Pre-Coated Supporting Panel
- 4 BASWA Adhesive
- 5 Stable Substrate
- 6 Surface Mounted Trim Piece
- 9 Adhesive Tape (to prevent air filtration)

DIMENSIONS				
SYSTEM A B C				
TOTAL THICKNESS	1 3/16" (30MM)	1 9/16" (40MM)	2 3/4" (70MM)	
FIXTURE ROUGH IN BELOW FACE OF SUBSTRATE	1"	1 3/8"	2 9/16"	


INSIDE CORNER DETAIL: BASWA Phon to BASWA Phon DETAIL #7

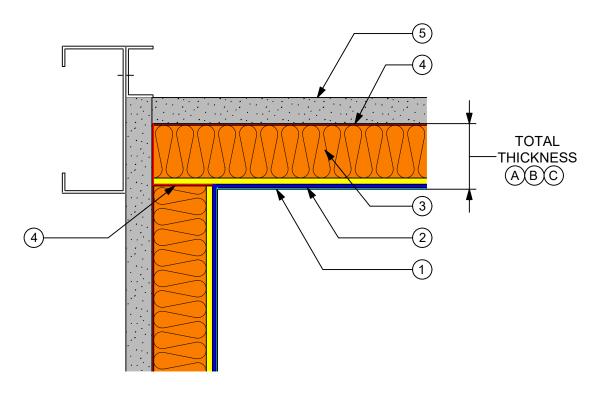

- 1 BASWA Fine Coat
- 2 BASWA Fine
- 3 BASWA Pre-Coated Supporting Panel
- 4 BASWA Adhesive
- 5 Stable Substrate

DIMENSIONS					
SYSTEM A B C					
TOTAL 1 3/16" 1 9/16" 2 3/4" THICKNESS (30MM) (40MM) (70MM)					

OUTSIDE CORNER DETAIL: BASWA Phon to BASWA Phon DETAIL #8

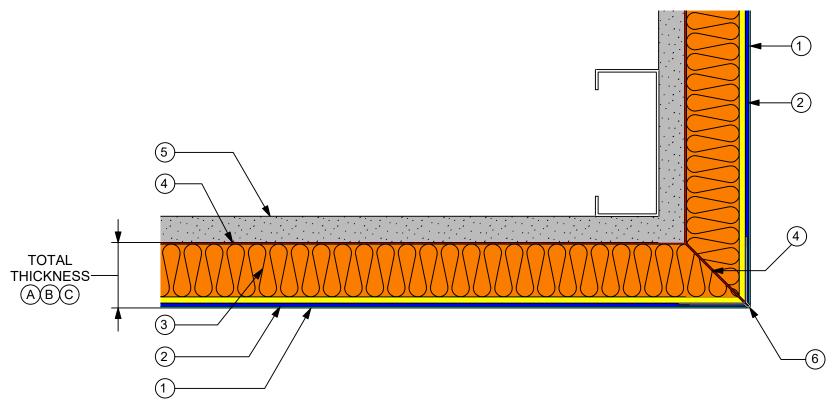


- 1 BASWA Fine Coat
- 2 BASWA Fine
- 3 BASWA Pre-Coated Supporting Panel
- 4 BASWA Adhesive
- 5 Stable Substrate
- 6 White Vinyl Trim BAS S010\* Corner Bead

DIMENSIONS					
SYSTEM A B C					
TOTAL 1 3/16" 1 9/16" 2 3/4" THICKNESS (30MM) (40MM) (70MM)					

<sup>\*</sup>All Vinyl Trims Applied with Trim Tex 847 Spray Adhesive


RECESSED LIGHT FIXTURE DETAIL #11

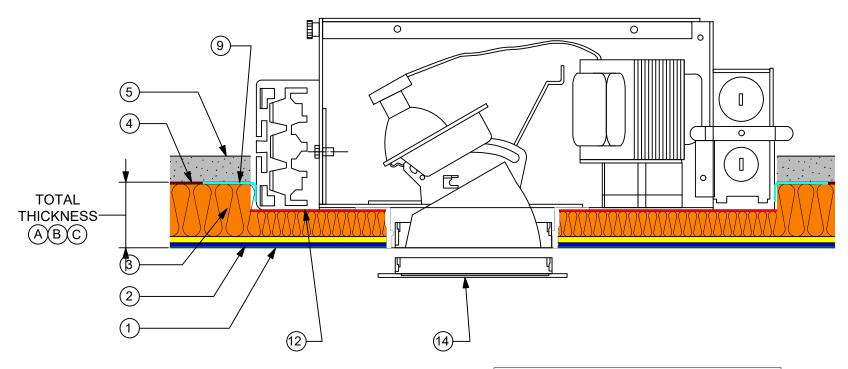

- 1 BASWA Fine
- 2 BASWA Base
- 3 BASWA Pre-Coated Supporting Panel
- 4 BASWA Adhesive
- 5 Stable Substrate
- 9 Adhesive Tape (to prevent air filtration)
- 12 Cut Out Back of Panel
- 14 Surface Mounted Trim Piece

DIMENSIONS				
SYSTEM	A	B	<u>C</u>	
TOTAL THICKNESS	1 3/16" (30MM)	1 9/16" (40MM)	2 3/4" (70MM)	
FIXTURE ROUGH IN BELOW FACE OF SUBSTRATE	1"	1 3/8"	2 9/16"	


CEILING MOUNTED FIXTURE #12

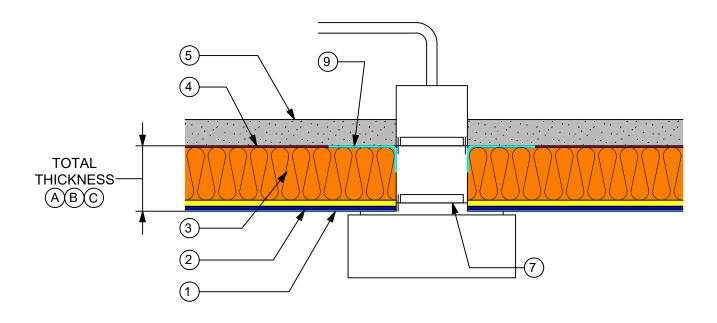

- 1 BASWA Fine
- 2 BASWA Base
- 3 BASWA Pre-Coated Supporting Panel
- 4 BASWA Adhesive
- 5 Stable Substrate
- 7 Electrical Junction Box Extension
- 9 Adhesive Tape (to prevent air infiltration)

DIMENSIONS			
SYSTEM	A	B	0
TOTAL THICKNESS	1 3/16" (30MM)	1 9/16" (40MM)	2 3/4" (70MM)
FIXTURE ROUGH IN BELOW FACE OF SUBSTRATE	1"	1 3/8"	2 9/16"

**ACCESS PANEL DETAIL #15** 

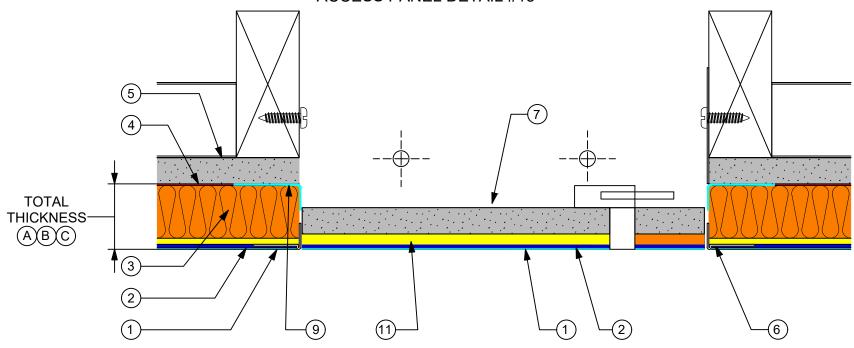


- 1 BASWA Fine
- 2 BASWA Base
- 3 BASWA Pre-Coated Supporting Panel
- 4 BASWA Adhesive
- 5 Stable Substrate
- 6 Vinyl Trim BAS 3310 5/8" L Bead\*
- 7 5/8" Drywall
- 9 Adhesive Tape (to prevent air infiltration)
- 11 BASWA Fill
- 14 Access Door (Acudor AT-5020)

DIMENSIONS			
SYSTEM	A	B	(C)
TOTAL THICKNESS	1 3/16" (30MM)	1 9/16" (40MM)	2 3/4" (70MM)
ACCESS PANEL ROUGH IN BELOW FACE OF SUBSTRATE	1 3/16"	1 9/16	2 3/4"

<sup>\*</sup>All Vinyl Trims Applied with Trim Tex 847 Spray Adhesive

BASWA Phon DRYWALL TRANSITION DETAIL #21

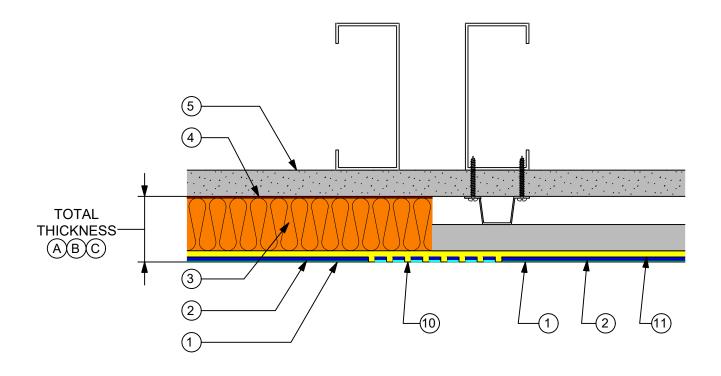


- 1 BASWA Fine
- 2 BASWA Base
- 3 BASWA Pre-Coated Supporting Panel
- 4 BASWA Adhesive
- 5 Stable Substrate
- 10 Fiberglass Mesh Tape\*\*
- 11 BASWA Fill

DIMENSIONS					
SYSTEM A B C					
TOTAL 1 3/16" 1 9/16" 2 3/4" THICKNESS (30MM) (40MM) (70MM)					

<sup>\*\*</sup>Mesh Tape Applied with 3M High Strength Adhesive

TERMINATION (L-BEAD) DETAIL #25

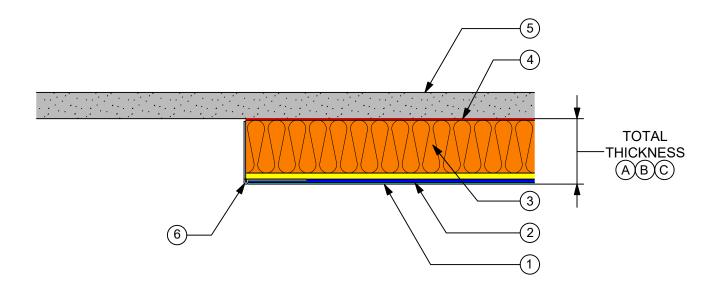


- 1 BASWA Fine
- 2 BASWA Base
- 3 BASWA Pre-Coated Supporting Panel
- 4 BASWA Adhesive
- 5 Stable Substrate
- 6 Vinyl Trim BASWA\*

DIMENSIONS				
SYSTEM A B C				
TOTAL THICKNESS	1 3/16" (30MM)	1 9/16" (40MM)	2 3/4" (70MM)	
TRIM TEX TRIM TO USE	BAS 3510	BAS 3650	BAS 3710	

<sup>\*</sup>All Vinyl Trims Applied with Trim Tex 847 Spray Adhesive

#### **BLOCKING FOR METAL REVEAL DETAIL #40**

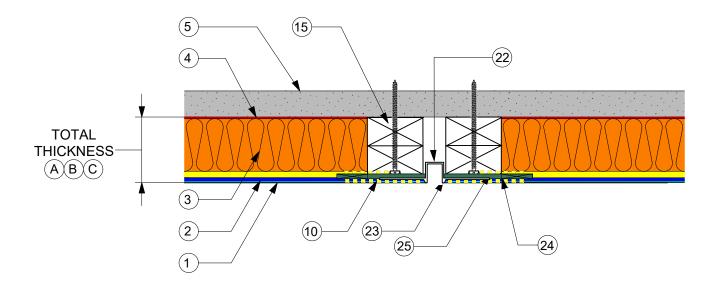


- 1 BASWA Fine
- 2 BASWA Base
- 3 BASWA Pre-Coated Supporting Panel
- 4 BASWA Adhesive
- 5 Stable Substrate
- 10 Fiberglass Mesh Tape
- 15 Blocking (not wood)
- 22 Metal Trims Secured to Framing with Screws
- 23 Apply BASWA Pre-fill to Edge Before Metal Trim is Installed
- 24 BASWA Pre-fill on Face 2" wide to accept Mesh Tape & Pre-fill
- 25 Fiberglass Mesh Tape\*\*

DIMENSIONS				
SYSTEM	A	B	C	
TOTAL THICKNESS	1 3/16" (30MM)	1 9/16" (40MM)	2 3/4" (70MM)	
BLOCKING ROUGH IN BELOW SUBSTRATE	7/8"	1 1/4"	2 3/8"	

<sup>\*</sup>All Vinyl Trims Applied with Trim Tex 847 Spray Adhesive

<sup>\*\*</sup> Mesh Tape Applied with 3M High Strength Adhesive

BLOCKING FOR METAL "L " TRIM DETAIL #41

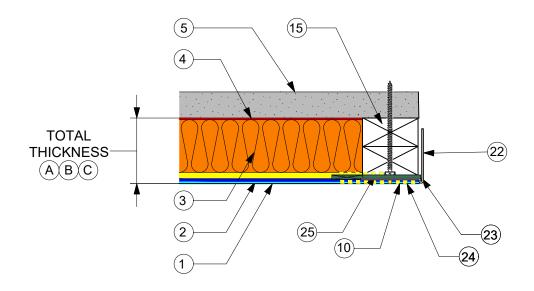

**DIMENSIONS** 

- 1 BASWA Fine
- 2 BASWA Base
- 3 BASWA Pre-Coated Supporting Panel
- 4 BASWA Adhesive
- 5 Stable Substrate
- 10 Fiberglass Mesh Tape
- 15 Blocking (not wood)
- 22 Metal Trims Secured to Framing with Screws
- 23 Apply BASWA Fill to Edge Before Metal Trim is Installed
- 24 BASWA Fill on Face 2" wide to accept Mesh Tape & Pre-fill
- 25 Fiberglass Mesh Tape

DIMENSIONS				
SYSTEM	A	B	(C)	
TOTAL THICKNESS	1 3/16" (30MM)	1 9/16" (40MM)	2 3/4" (70MM)	
BLOCKING ROUGH IN BELOW SUBSTRATE	7/8"	1 1/4"	2 3/8"	

<sup>\*</sup>All Vinyl Trims Applied with Trim Tex 847 Spray Adhesive \*\*Mesh Tape Applied with 3M High Strength Adhesive