


BASWA Phon Classic Base Finish

CEILING TO WALL TRANSITION DETAIL #2

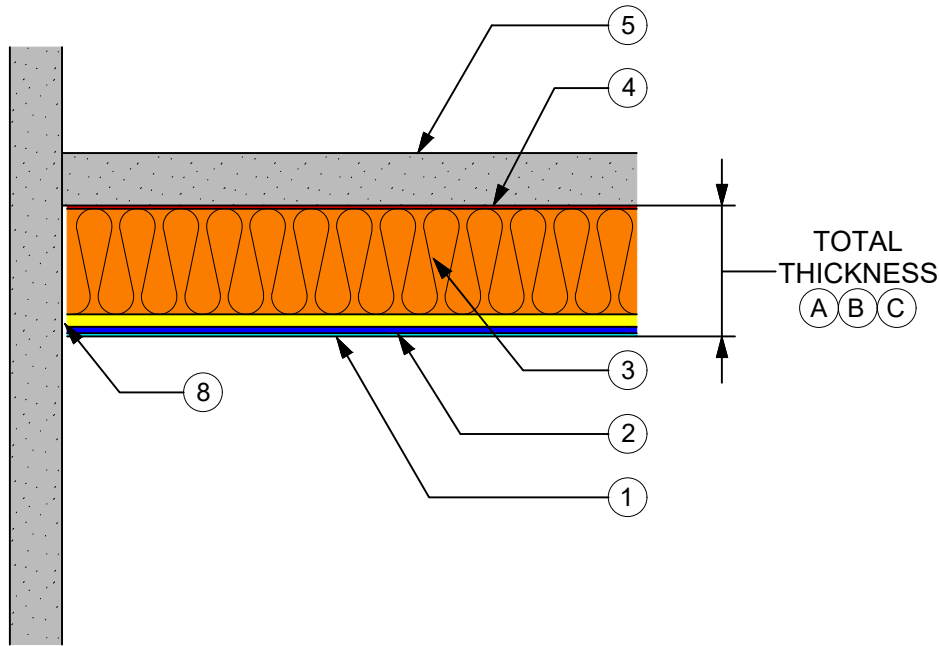


- 1 BASWA Base
- 2 BASWA Base
- 3 BASWA Pre-Coated Supporting Panel
- 4 BASWA Adhesive
- 5 Stable Substrate
- 8 1/8" Swedish Cut

DIMENSIONS			
SYSTEM	(A)	(B)	(C)
TOTAL THICKNESS	1 3/16" (30MM)	1 9/16" (40MM)	2 3/4" (70MM)

BASWA Phon Classic Base Finish

FIRE SPRINKLER HEAD DETAIL #3

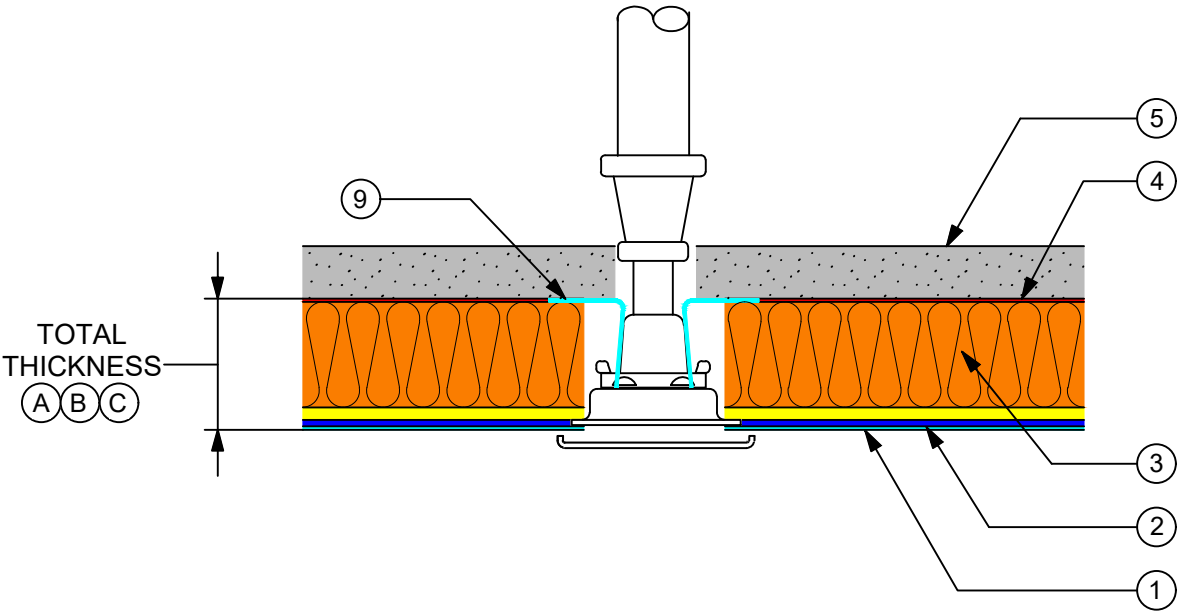


- 1 BASWA Base
- 2 BASWA Base
- 3 BASWA Pre-Coated Supporting Panel
- 4 BASWA Adhesive
- 5 Stable Substrate
- 9 Adhesive Tape (to prevent air filtration)

DIMENSIONS			
SYSTEM	(A)	(B)	(C)
TOTAL THICKNESS	1 3/16" (30MM)	1 9/16" (40MM)	2 3/4" (70MM)
FIXTURE ROUGH-IN BELOW FACE OF SUBSTRATE	1"	1 3/8"	2 9/16"

BASWA Phon Classic Base Finish

EXPANSION JOINT DETAIL #4

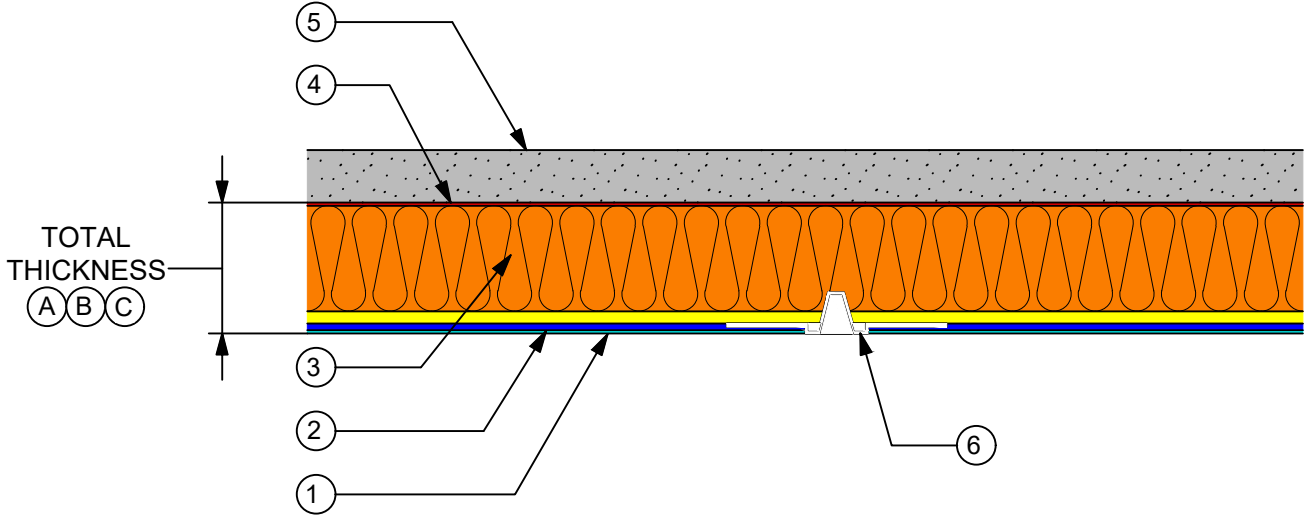


- 1 BASWA Base
- 2 BASWA Base
- 3 BASWA Pre-Coated Supporting Panel
- 4 BASWA Adhesive
- 5 Stable Substrate
- 6 Vinyl Trim BAS 093V Expansion Joint

DIMENSIONS			
SYSTEM	(A)	(B)	(C)
TOTAL THICKNESS	1 3/16" (30MM)	1 9/16" (40MM)	2 3/4" (70MM)

*All Vinyl Trims Applied with BAS 847 Spray Adhesive

BASWA Phon Classic Base Finish

OUTSIDE CORNER DETAIL #5

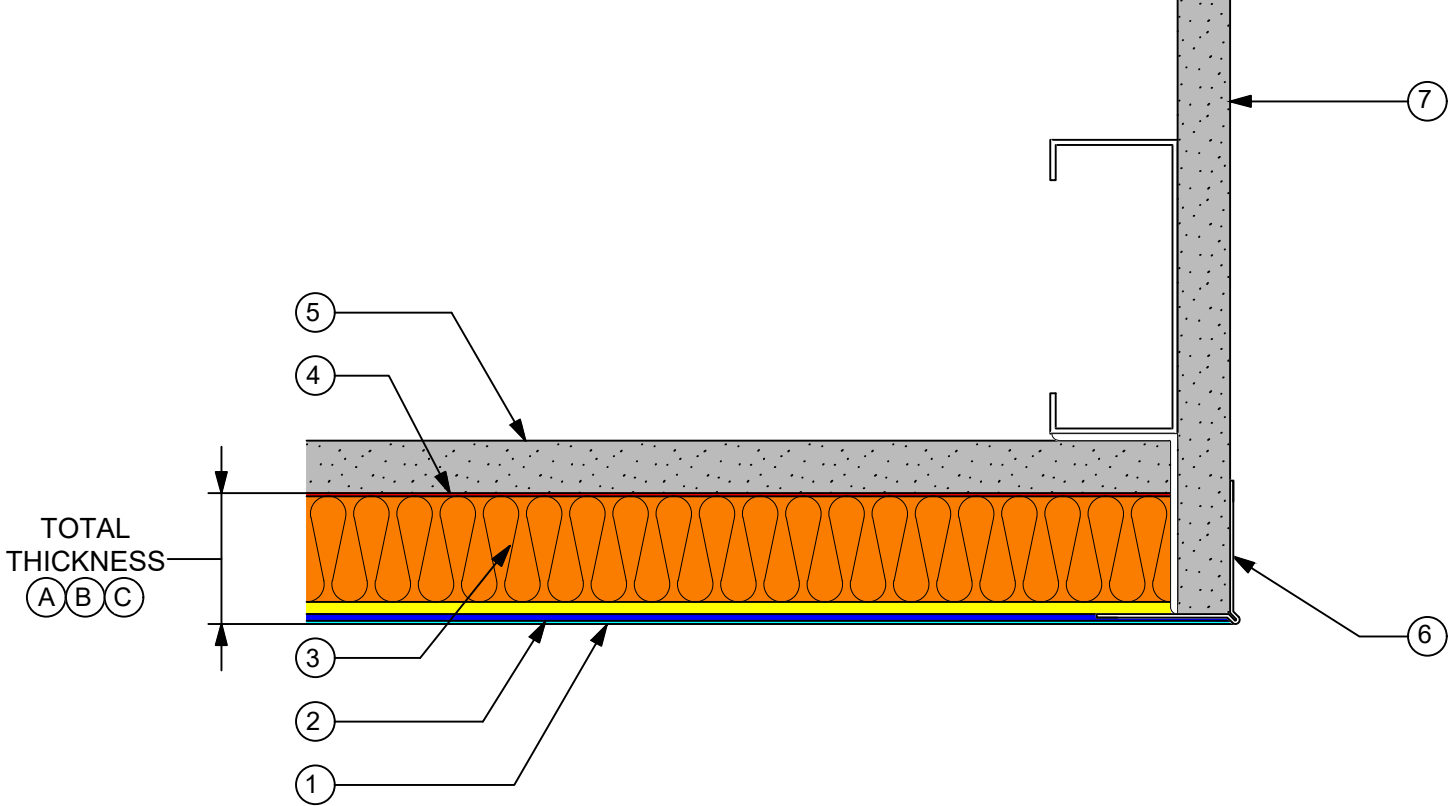


- 1 BASWA Base
- 2 BASWA Base
- 3 BASWA Pre-Coated Supporting Panel
- 4 BASWA Adhesive
- 5 Stable Substrate
- 6 Vinyl Trim BAS S010 Corner Bead
- 7 Drywall Finished and Painted

DIMENSIONS			
SYSTEM	(A)	(B)	(C)
TOTAL THICKNESS	1 3/16" (30MM)	1 9/16" (40MM)	2 3/4" (70MM)
DRYWALL OVERHANG BELOW FACE OF SUBSTRATE	1"	1 3/8"	2 9/16"

*All Vinyl Trims Applied with BAS 847 Spray Adhesive

BASWA Phon Classic Base Finish

RECESSED LIGHT DETAIL #6

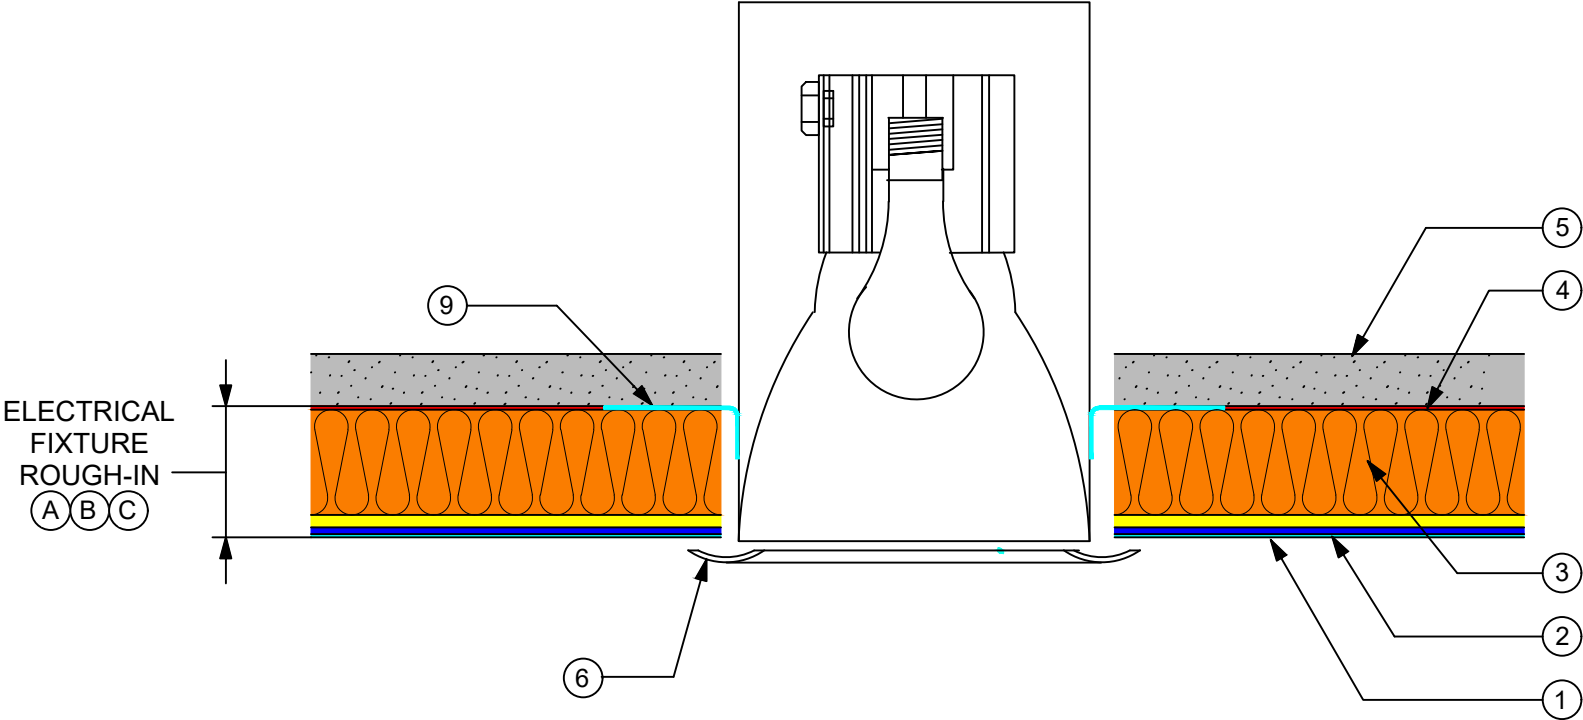


- 1 BASWA Base
- 2 BASWA Base
- 3 BASWA Pre-Coated Supporting Panel
- 4 BASWA Adhesive
- 5 Stable Substrate
- 6 Surface Mounted Trim Piece
- 9 Adhesive Tape (to prevent air filtration)

DIMENSIONS			
SYSTEM	(A)	(B)	(C)
TOTAL THICKNESS	1 3/16" (30MM)	1 9/16" (40MM)	2 3/4" (70MM)
FIXTURE ROUGH IN BELOW FACE OF SUBSTRATE	1"	1 3/8"	2 9/16"

BASWA Phon Classic Base Finish

INSIDE CORNER DETAIL: BASWA Phon to BASWA Phon DETAIL #7

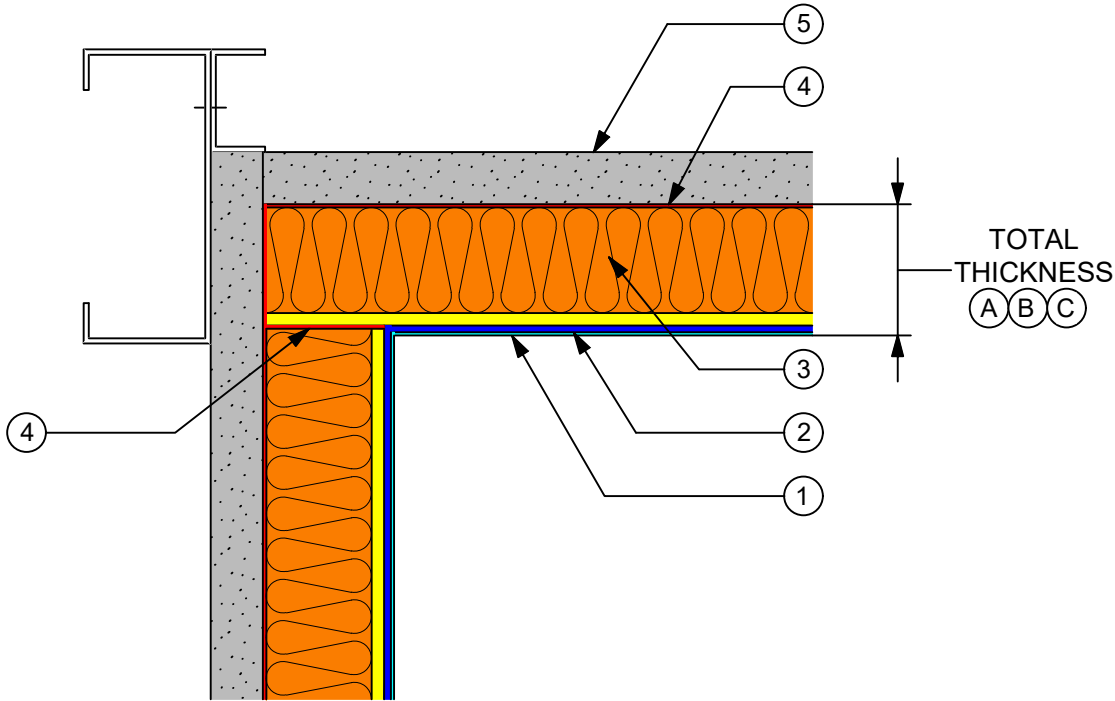


- 1 BASWA Base
- 2 BASWA Base
- 3 BASWA Pre-Coated Supporting Panel
- 4 BASWA Adhesive
- 5 Stable Substrate

DIMENSIONS			
SYSTEM	A	B	C
TOTAL THICKNESS	1 3/16" (30MM)	1 9/16" (40MM)	2 3/4" (70MM)

BASWA Phon Classic Base Finish

OUTSIDE CORNER DETAIL: BASWA Phon to BASWA Phon DETAIL #8

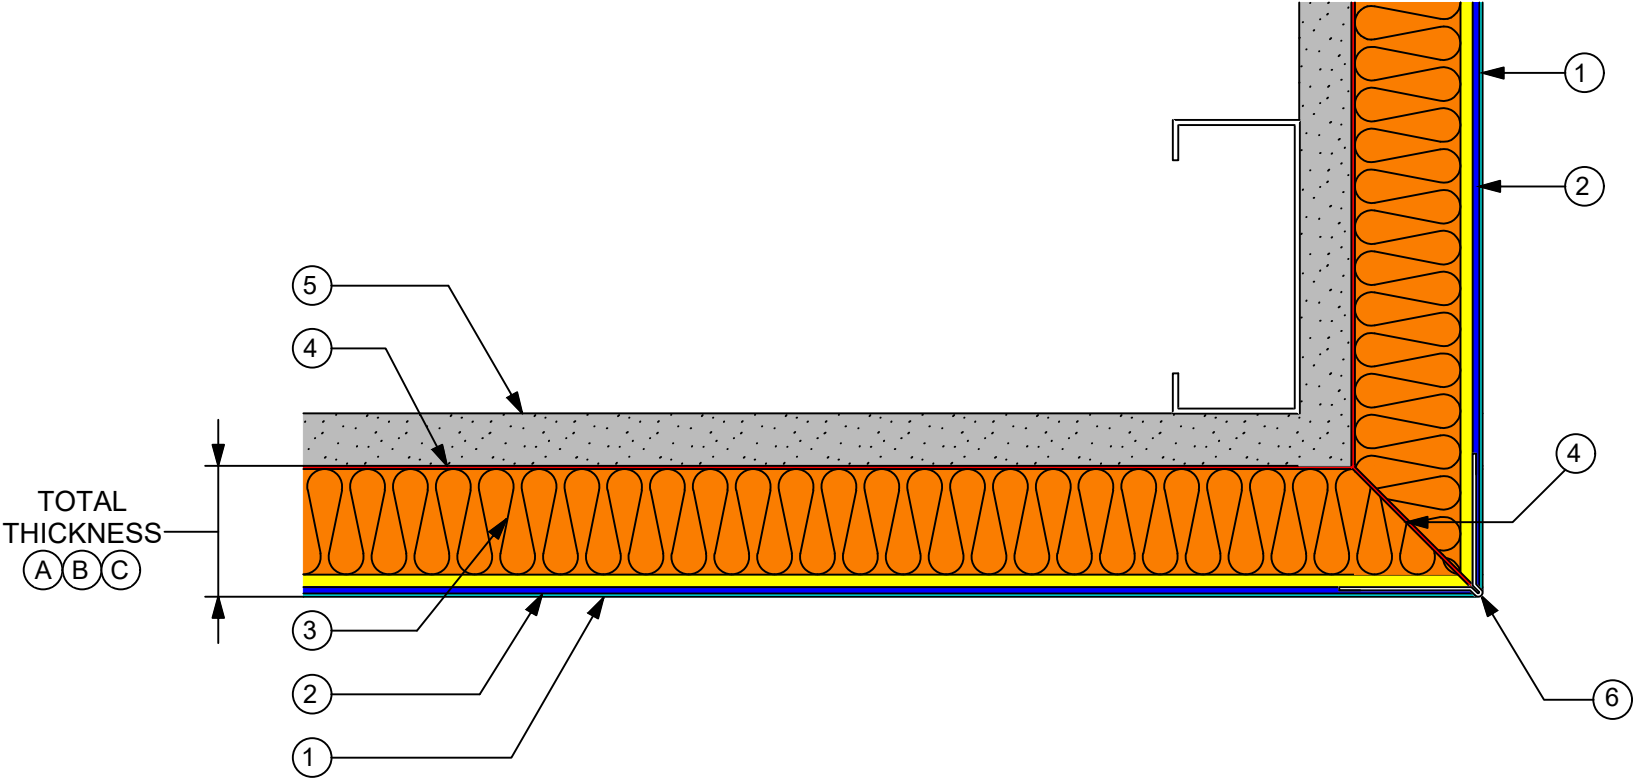


- 1 BASWA Base
- 2 BASWA Base
- 3 BASWA Pre-Coated Supporting Panel
- 4 BASWA Adhesive
- 5 Stable Substrate
- 6 Vinyl Trim BAS S010 Corner Bead

DIMENSIONS			
SYSTEM	(A)	(B)	(C)
TOTAL THICKNESS	1 3/16" (30MM)	1 9/16" (40MM)	2 3/4" (70MM)

*All Vinyl Trims Applied with BAS 847 Spray Adhesive

BASWA Phon Classic Base Finish

RECESSED LIGHT FIXTURE DETAIL #11

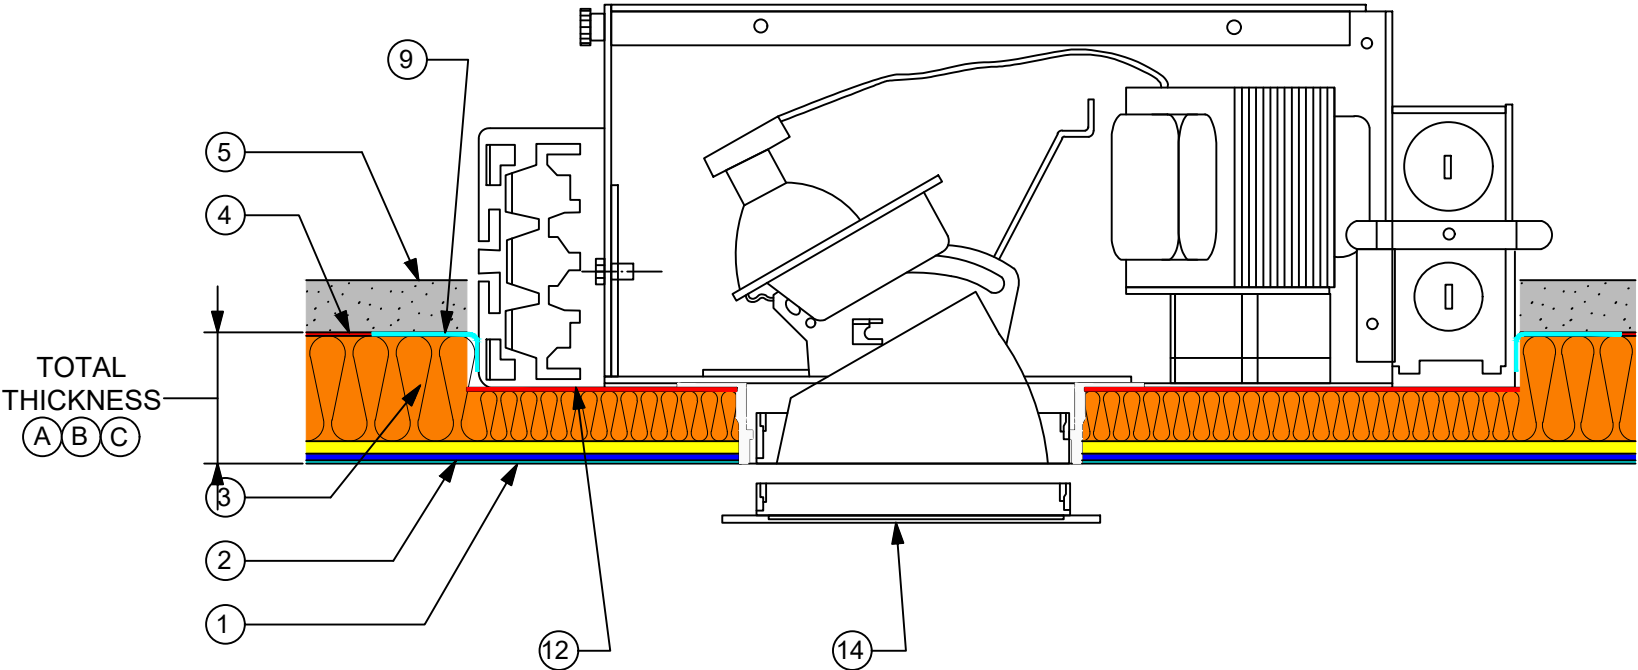


- 1 BASWA Base
- 2 BASWA Base
- 3 BASWA Pre-Coated Supporting Panel
- 4 BASWA Adhesive
- 5 Stable Substrate
- 9 Adhesive Tape (to prevent air filtration)
- 12 Cut Out Back of Panel
- 14 Surface Mounted Trim Piece

DIMENSIONS			
SYSTEM	A	B	C
TOTAL THICKNESS	1 3/16" (30MM)	1 9/16" (40MM)	2 3/4" (70MM)
FIXTURE ROUGH IN BELOW FACE OF SUBSTRATE	1"	1 3/8"	2 9/16"

BASWA Phon Classic Base Finish

CEILING MOUNTED FIXTURE #12

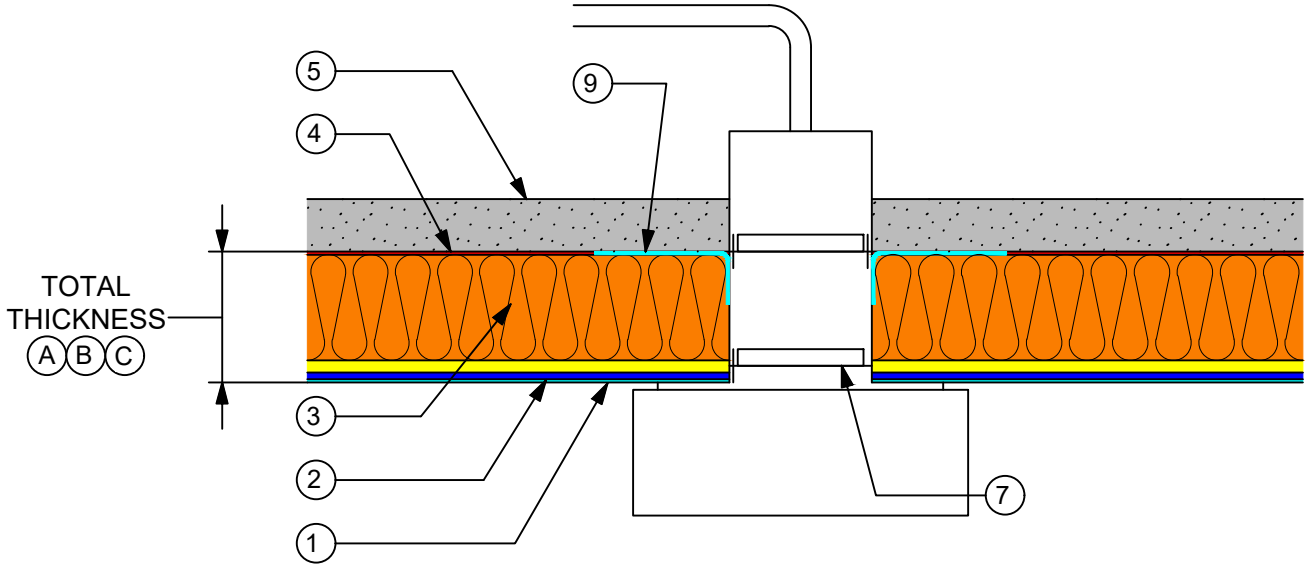


- 1 BASWA Base
- 2 BASWA Base
- 3 BASWA Pre-Coated Supporting Panel
- 4 BASWA Adhesive
- 5 Stable Substrate
- 7 Electrical Junction Box Extension
- 9 Adhesive Tape (to prevent air infiltration)

DIMENSIONS			
SYSTEM	A	B	C
TOTAL THICKNESS	1 3/16" (30MM)	1 9/16" (40MM)	2 3/4" (70MM)
FIXTURE ROUGH IN BELOW FACE OF SUBSTRATE	1"	1 3/8"	2 9/16"

BASWA Phon Classic Base Finish

ACCESS PANEL DETAIL #15

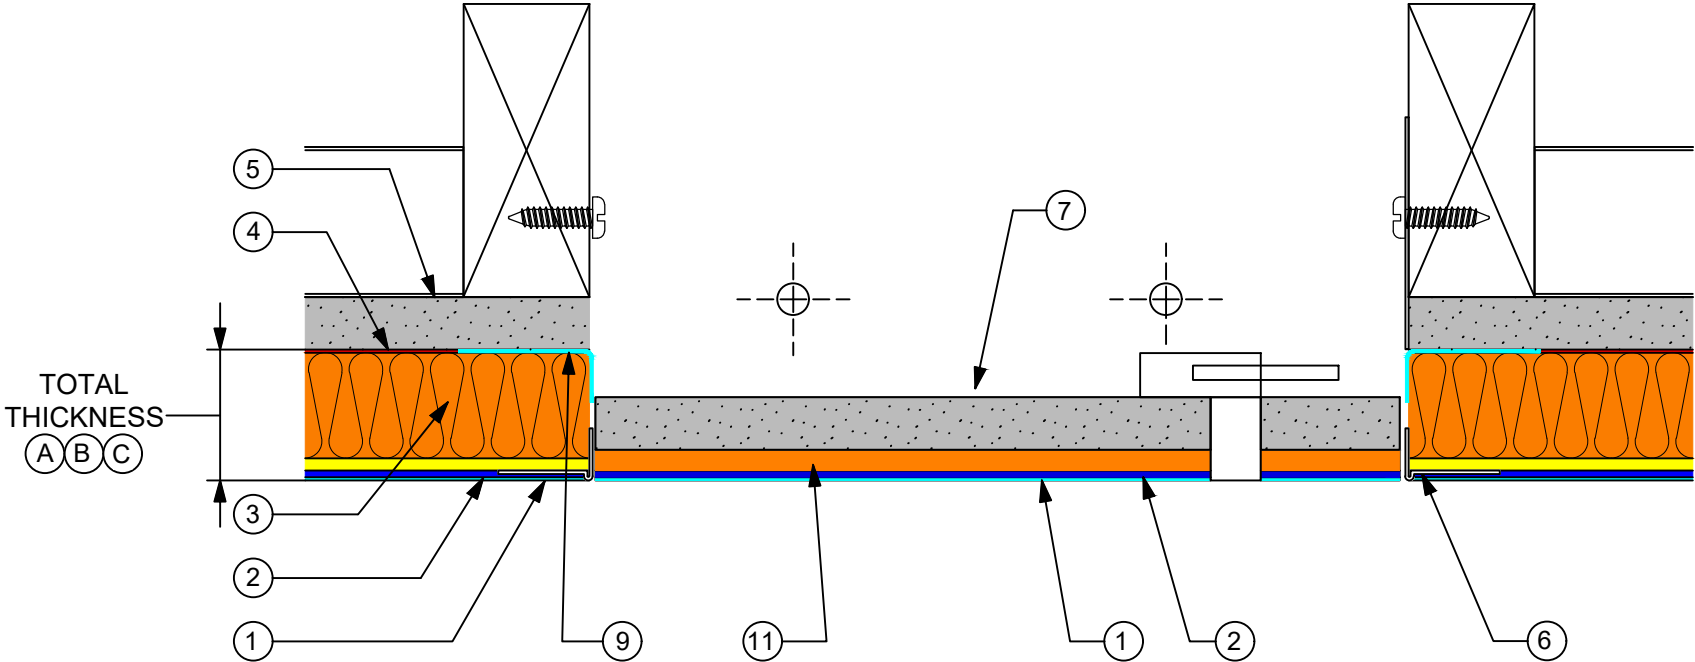


- 1 BASWA Base
- 2 BASWA Base
- 3 BASWA Pre-Coated Supporting Panel
- 4 BASWA Adhesive
- 5 Stable Substrate
- 6 Vinyl Trim BAS 3310 5/8 " L Bead
- 7 5/8" Drywall
- 9 Adhesive Tape (to prevent air infiltration)
- 11 BASWA Fill
- 14 Access Door (Acudor AT-5020)

DIMENSIONS			
SYSTEM	(A)	(B)	(C)
TOTAL THICKNESS	1 3/16" (30MM)	1 9/16" (40MM)	2 3/4" (70MM)
ACCESS PANEL ROUGH IN BELOW FACE OF SUBSTRATE	1 3/16"	1 9/16"	2 3/4"

*All Vinyl Trims Applied with BAS 847 Spray Adhesive

BASWA Phon Classic Base Finish

BASWA Phon DRYWALL TRANSITION DETAIL #21

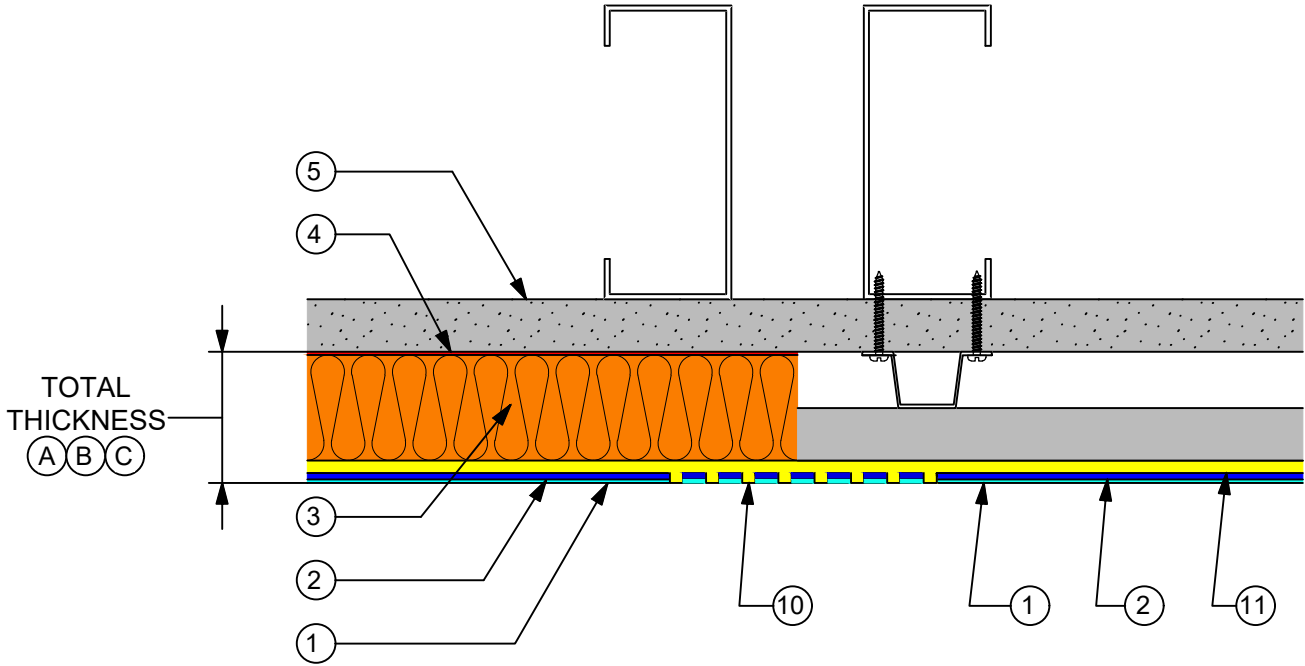


- 1 BASWA Base
- 2 BASWA Base
- 3 BASWA Pre-Coated Supporting Panel
- 4 BASWA Adhesive
- 5 Stable Substrate
- 10 Fiberglass Mesh Tape**
- 11 BASWA Fill

DIMENSIONS			
SYSTEM	A	B	C
TOTAL THICKNESS	1 3/16" (30MM)	1 9/16" (40MM)	2 3/4" (70MM)

**Mesh Tape Applied with 3M High Strength Spray Adhesive

BASWA Phon Classic Base Finish

TERMINATION (L-BEAD) DETAIL #25

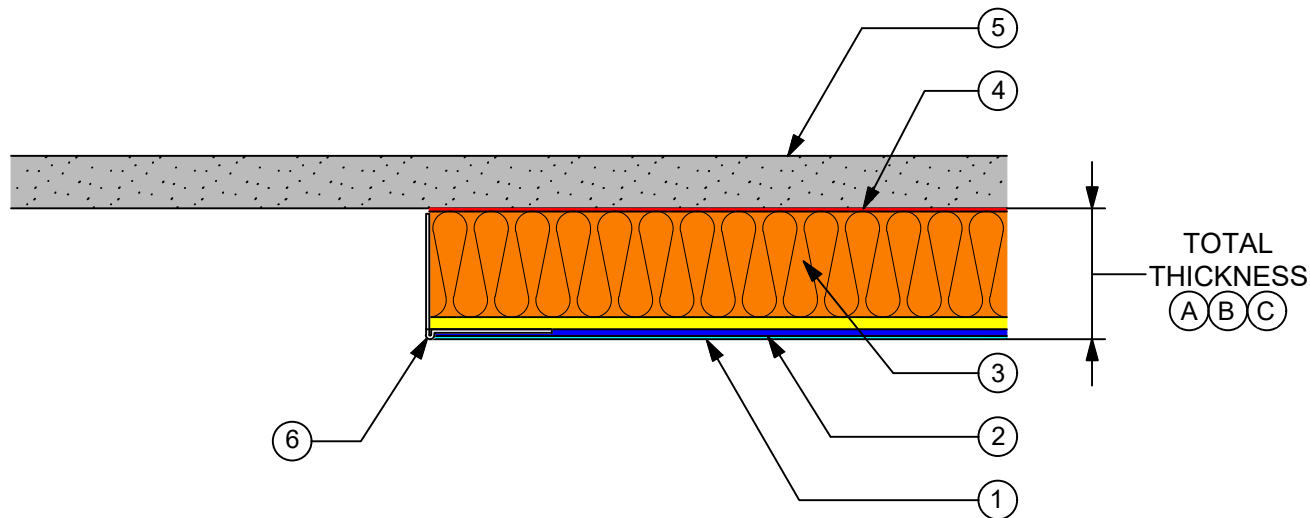

- 1 BASWA Base
- 2 BASWA Base
- 3 BASWA Pre-Coated Supporting Panel
- 4 BASWA Adhesive
- 5 Stable Substrate
- 6 Vinyl Trim - BAS (Refer to Dimensions Box)

DIMENSIONS			
SYSTEM	(A)	(B)	(C)
TOTAL THICKNESS	1 3/16" (30MM)	1 9/16" (40MM)	2 3/4" (70MM)
BASWA TRIM TO USE	BAS 3510	BAS 3650	BAS 3710

*All Vinyl Trims Applied with BAS 847 Spray Adhesive