



Atlas SD.



Atlas SD | Ivory

A flexible anti-static vinyl floor, ideal for server rooms, control stations or areas with sensitive equipment. This compact, calendered homogeneous vinyl has a low electrical resistance (< 2 kV) designed to dissipate static build up continuously.



0013 Arctic Ice




0005 Erica



0003 Ivory

Drawing Inspiration
The permanent anti-static properties provide a safer environment that prevents electrical interference.

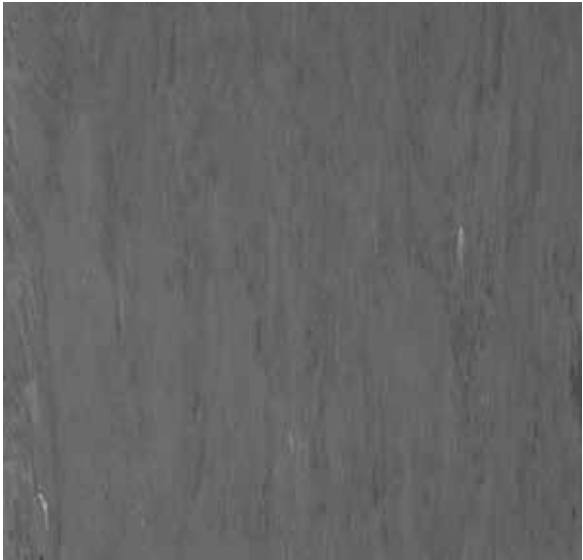

Extended Specifications

Use Classification	34-43 (EN 685)	Heavy Commercial
Total Thickness	2mm	
Weight	3300g/m2	
Width	2m	
Roll Length	20Lm	
Tile Size	608 x 608mm	
No of Tiles/Box	20	
K Rating	K4	
Wear Group	M (EN 649)	
Wear Resistance	≤7.5mm3 (EN 660.2)	
Electrical Resistance	106≤ R ≤ 108 Ω (EN 1081)	
Fire Rating	Bfl-s1 (EN 13501-1)	
Slip Resistance	R9 (DIN 51130/BGR 181)	
Static Electrical Propensity	< 2kV (EN 1815)	
Dimensional Stability	≤ 0.25% (EN 434)	
Residual Indentation	≈ 0.03mm (EN 433)	
Thermal Conductivity	0.25 W/(m.K) (EN 12524)	
Colour fastness	≥6° (EN 20105 - B02)	
Chemical Resistance	Yes (EN 423)	
Antibacterial & Fungicidal Treatment	Yes	
TVOC After 28 Days	<10µg/m3 (ISO 16000-6)	