SUGGESTED MINIMUM CREW: 2
APPROXIMATE INSTALL TIME: 1



REVIEW ENTIRE DOCUMENT PRIOR TO ASSEMBLY


HARDWARE:



JOINER BOLT 1/4"-20 x 9/16"



JOINER BOLT 1/4"-20 x 7/8"



WALL MOUNT BRACKET 22 1/2" X 2 1/2"



WOOD SCREW 1/4"-20 x 5/8"




MOUNTING PLATE 1/4" x 3" x 4"

Customer Support: 1.800.668.9318 Email: mail@nienkamper.com Web: www.nienkamper.com




GATEWAY™ WALL MOUNTED TABLES

INSTALLATION GUIDE

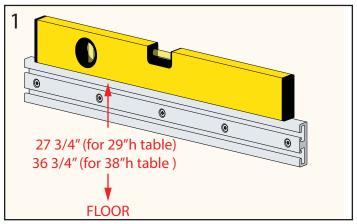


Fasten Support Rail to the building wall. Building wall should either have plywood blocking or be concrete. Use #12 x 2 1/2" flat head screws @ 5 places. Use wood screws for plywood or Tap-cons for concrete.




Option A)
Place rails upside down on the ground.
The T-nuts in the rail should be facing in towards each other. Attach the base to the rail with 1/4"-20 x 9/16" joiner bolts (qty 4).




Option B)
Place rails upside down on the ground.
The T-nuts in the rail should be facing up. Attach the base to the rail with 1/4"-20 x 9/16" joiner bolts (qty 4). (this configurations used with standing height and mid bases.

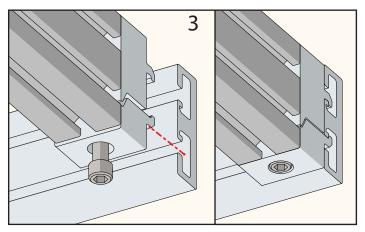


Attach the rail and base assembly to the wall bracket. The rail grips onto the wall bracket as shown. You will need a 1/4" Allen key to tighten cap screw.

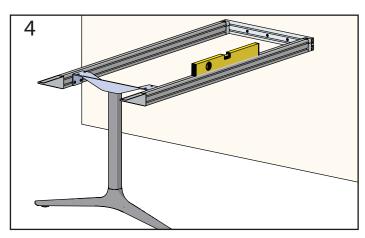

Place a level on the rails. Adjust the glides until the base is level. If the floor is out of level you may need to remount the wall mount bracket.

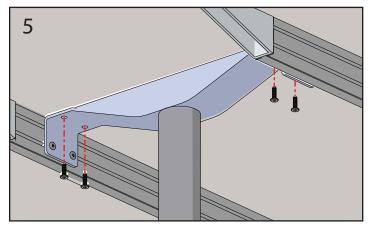

Place the top on the base assembly. Attach the base to the top with (4) $1/4-20 \times 7/8$ " joiner bolts.

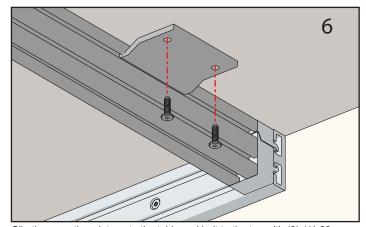

Clip the mounting plate onto the table and bolt to the top with (2) 1/4-20 x 7/8" joiner bolts.

SHOW-ME CABLE

INSTALLATION GUIDE



Mount the Switcher Box shelf in place using #6 x 5/8" screws (qty 4).



With the supplied plastic tabs snapped into place on underside of Surge Protector, align with grooves in support rail and gently push into place (qty 1).



If your installation includes a Switcher Box - locate it now.



Slide the Switcher Box into place in Shelf.




Secure Switcher Box with screws provided by the Manufacturer.



Vox Forums mount from underside and are held in place with plastic thumb screws and tabs (qty 4).



Manage all cabling using the Wire Clips.



Pass "Show Me" cables through Forum face and plug into Switcher Box.



Manage all "Show Me" cables with Wire Management trays. To install, position closely to Forum and screw in place with #6 x 5/8" wood screws (qty4).

