

Catalog # **16b**
Item number: **10210**
Description:

Polyveyor 1.5 CFM Rated #1951

International Designation:

N/A

Pulley Diameter, Minimum

Minimum Pulley Diameter 0.00 in

Belt Strength:

Tension Rating (PIW) 60 PIW

Construction:

Compound Top Cover None

Color White

Top Cover Thickness (in) (0.00 mm) 0.00 in

Top Cover Description Calendared

Compound Bottom Cover None

Bottom Cover Thickness (in) (0.00 mm) 0.00 in

Bottom Cover Description Calendared

Number of Plies 1

Overall Gauge (in) (6.35 mm) 1/4 in

Unit Weight- lb/PIW 0.0550 lbs/PIW

Carcass Type Needled Polyester

Compound None

Temperature Range (°F)- High 310 °F

Temperature Range (°F)- Low -60 °F

Splice Instructions:

Splice Step No

Splice Finger No

Other:

Static Conducting No

Cross Rigid No

High Heat No

Impression Top No

Oil Resistant No

Fire Resistant No

FDA Approved No

Suggested Fasteners:

Flexco Plate/Rivet N/A

Flexco Hinged N/A

Alligator Staple N/A

Clipper Lace N/A

Alligator Lace N/A

Special Characteristics:

Designed specifically for air gravity conveyors. Used to fluidize dry bulk powders such as: cement, barite, silica, alumina, etc.. Provides several advantages over woven air permeable fabrics because it does not require stretching prior to installation and will not unravel when cut or punched.

*****All Values are nominal and subject to change without notice.*****

St. Louis, MO	Boise, ID	Charlotte, NC	Grand Prairie, TX	Philadelphia, PA	Sacramento, CA	Vancouver, WA	Beltservice Canada	Beltservice de Mexico
800-727-2358	800-423-4469	800-849-2358	800-727-2358	800-777-1314	800-289-2358	800-234-2358	877-210-7423	+52 55 53620434
314-344-8500	208-342-4681	704-949-2100	314-344-8555	215-295-1900	916-419-7191	360-567-4280	905-565-9217	+44 2980 3266

AIR PERMEABLE FABRIC

POLYVEYOR 1.5 CFM RATED #1951

16b


Catalog Number

10210

Part Number



Top Cover View

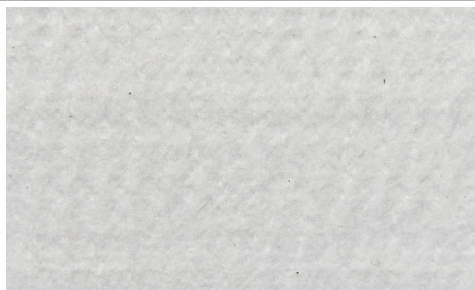

Bottom Cover View



Ply View



BELTSERVICE
CORPORATION

beltservice.com

REV 3/23