

The trusted classic. We love the simplicity of our functional fabric-wrapped acoustic baffles. Call it like it is, right? A cost-effective and known solution to controlling sound in any space, these come in various standard sizes and are offered in several thickness options to accommodate all budgets.

Don't Mess with A Good Thing, Perfect It.

Meticulously crafted like your future depends on it, because it does.



Specifications

Product Name	Fabric Baffle or Dimensional Baffle
Dimensional Desig	Aspen, Currents, Dunes, Infinity, Linear, Ripple, Sand Dunes, Silhouettes, Steps, Wave
	6–7lb fiberglass board with optional tackable & high-impact resistant facers, 100% sumer recycled polyester fabric
Thickness	2" and 4"
Unit Length	96"
Unit Height	12-48"
Weight	2" = 1.6 lbs/ sq ft, 4" = 3 lbs/sq ft
Edge Options	Square or Beveled
Sound Performand	ce ASTM C423-17: NRC 2" = 1.31
Fire Performance	ASTM 84 Class A

Environmental Low VOC emissions, woven fabrics are FR (Flame Retardant) free and compliant with CAL AB 2998.

Maintenance Vacuum to remove any loose dirt or dust. You may use a soft or plastic bristle brush to loosen

it. Avoid excess pressure. Compressed air can also be used to dust the material in difficult or

large installations. Remove ordinary dirt and smudges with a mild soap and water solution and a clean, soft cloth or towel. Dry with a soft lint-free cloth or towel. A melamine magic eraser can be used for more difficult stains. Always apply any cleaning methods to a small area first to test effectiveness and result.

Warranty	5 years
Unit of Sale	Per unit

Price




Snap the QR Code or visit sonusna.com to see pricing.


Sonus is the only manufacturer to have published universal pricing because:

- 1) We got nothing to hide.
- 2) We are here for *you*: faster, easier, straightforward.

Sonus creates the perfect experience for each person in any moment.

Construction & Hardware



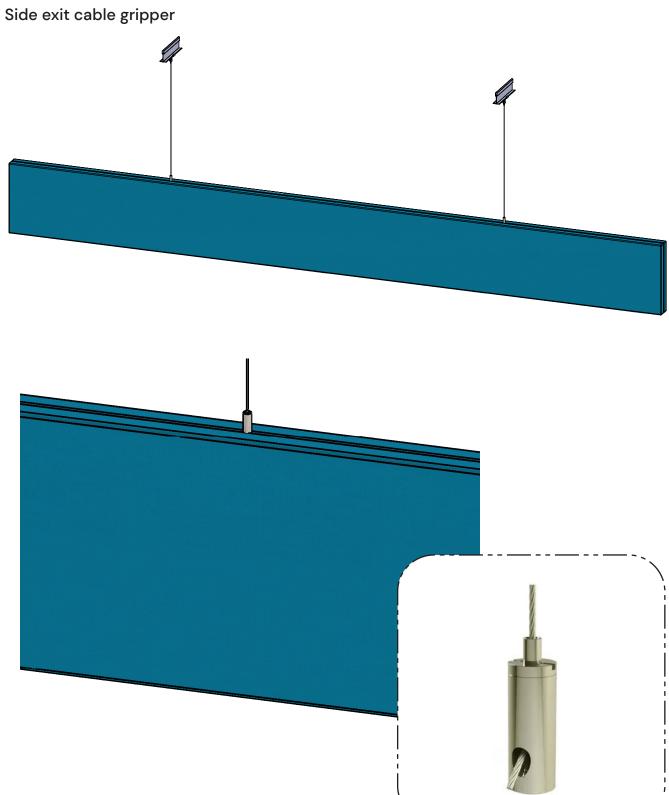


Colors

We currently offer over 40 standard colors thanks to our partnership with Burch. See our Sonus Standard Fabrics document on the next page for a complete listing.

We also carry a wide array of other acoustic fabrics and colors by Guilford of Maine, Knoll, Maharam, and more.

Test Results

2" Fabric Baffle



Freq (Hz)	Absorption Coefficiency
160	0.19
250	0.63
500	1.19
800	1.63
1250	1.74
2000	1.69
3150	1.58
NRC	1.31

The Noise Reduction Coefficiency (NRC) is calculated as the arithmetic average of the absorption coefficients in the shaded bands only (250, 500, 1250 & 2000 Hz).

ASTM C 423-17: Type J Mounting - using 8 baffle units suspended with aircraft wire. 12" oc to simulate a typical baffle installation.



Standard Fabrics

Prime Time

