

Installation Instructions

FULL WALL FACED TOILET SUITE



Installation of Toilet Seat and Cleaning

It is recommended that toilet seat and cover be installed after all trades are finished

Note:

Installation to be in accordance with AS/NZS 3500 series of Standards and/or local regulations.
All measurements for roughing-in should be taken from finished wall/floor. It is strongly recommended by the manufacturer that installation is carried out by a licensed plumber.

Cleaning Recommendations

The high quality vitreous china finish on all sanitary ware can be maintained by simply using mild soapy water and wiping over.
sanitary ware should not be cleaned with abrasive materials e.g. steel wool/scourers. Do not use any corrosive or abrasive cleaning agents containing acids or scouring agents as this may lead to surface damage.
Bleaches can also discolour seats and hinges and therefore should not be used.
If your toilet has metal hinges they should only be cleaned with a mild liquid domestic cleaner, with soft soapsuds or Steel & Chrome cleaner
After cleaning, rinse with clean water and polish with a clean soft cloth.

INSTALLATION INFORMATION

S-Trap

1

1. Rough in position of water inlet, waste outlet and floor fixing bracket holes. Ensure inlet connection extends 60mm from finished wall. Drill holes for floor fixing bracket then fix brackets to floor.

2

2. Lubricate the fins of the pan bend and position into waste pipe.

3

3. Lubricate rubber on the exposed connector end

P Trap

4

4. Align and push fully assembled toilet back to the wall



5

5. Set up waste pipe so that the end of the pan collar extends 260mm from the finished wall.


6

6. Align and push fully assembled toilet back to the wall, connecting pan spigot to pan collar. Bucket flush and check for leaks. Due to the design, weight, and stability of the pan and cistern a silicone adhesive only is recommended and excepted by manufacturer for floor based Fixing.

7

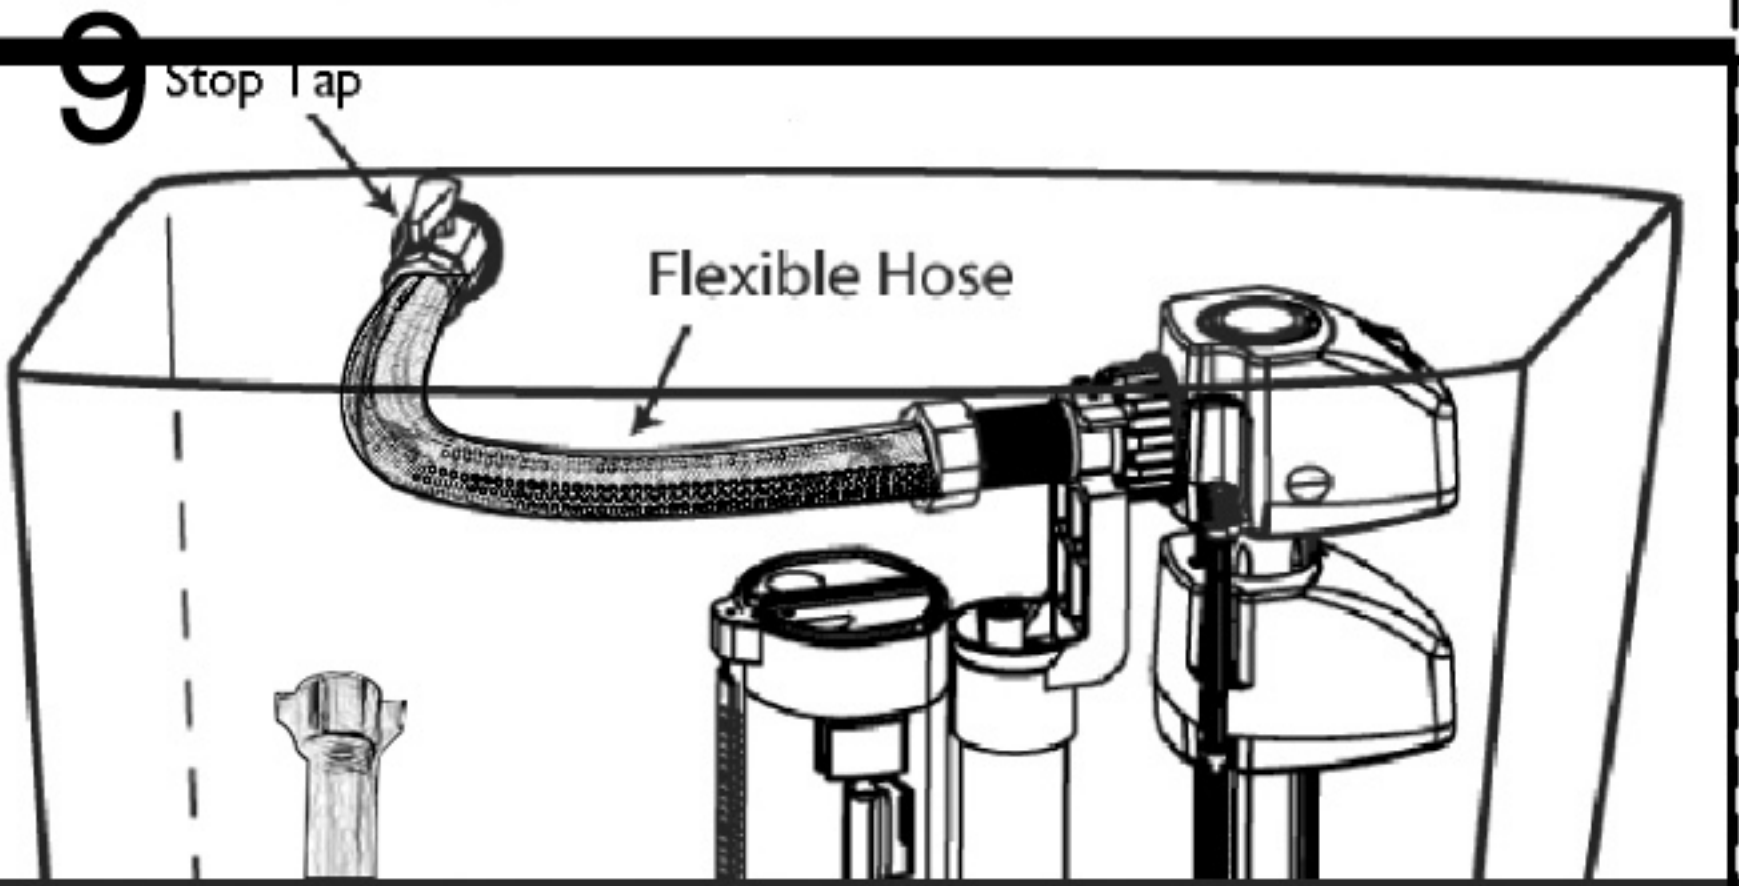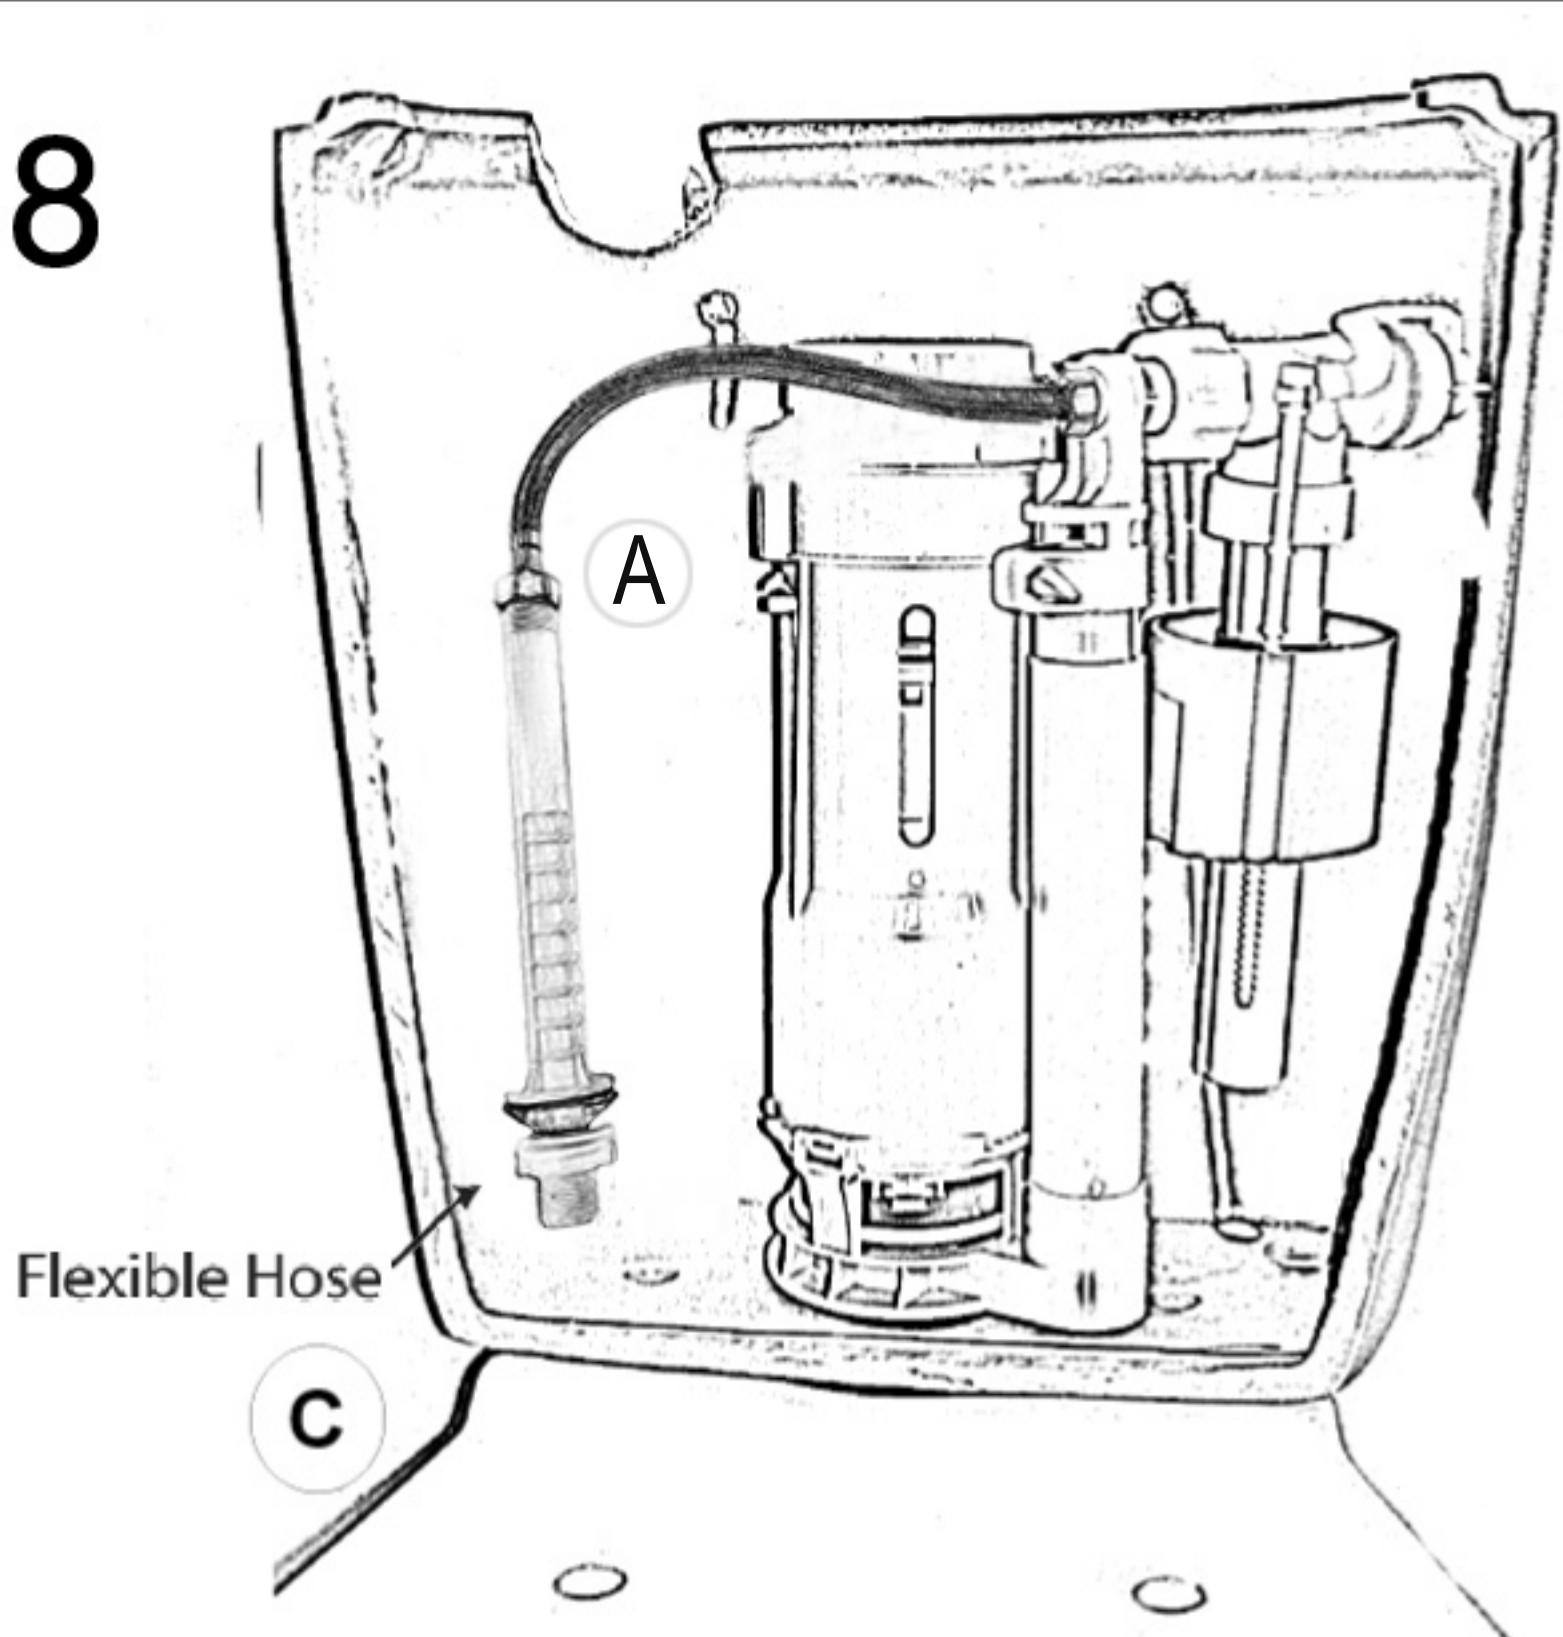

9. IF STEP 8 IS COMPLETED, SKIP THIS STEP. Fit off stop tap then connect rear water inlet valve to stop tap. Fill cistern and ensure correct water level.

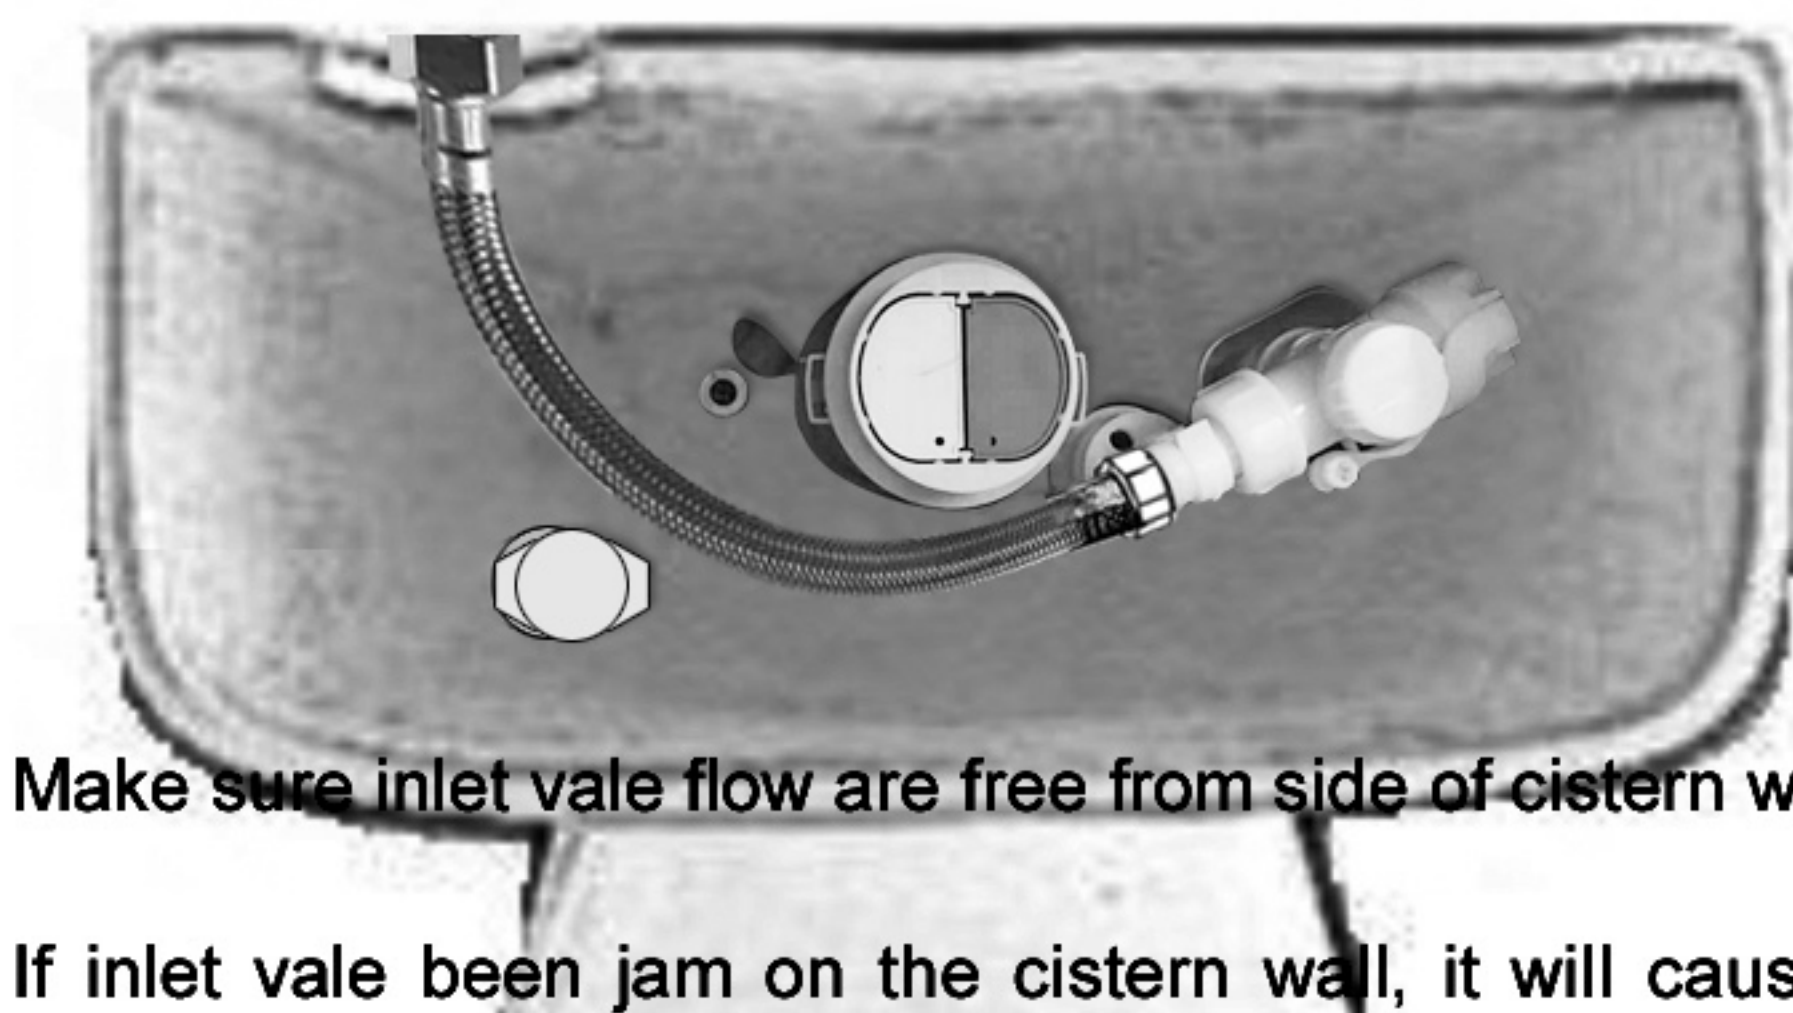

Make sure inlet vale flow are free from side of cistern wall.
If inlet vale been jam on the cistern wall, it will cause inlet vale keep filling.

8. IF BACK INLET, SKIP THIS STEP.
For Bottom(left hand) inlet connection, please connect flexible hose to plastic tube A, then complete stop tap connection to underside of cistern plug C. Fill cistern and ensure correct water level.
Note: Inlet valve can be adjusted if required.