

The ProRack HELIOS 12 cylinder pallet system is engineered to be a robust solution securing 12 high pressure cylinders on a pallet for easy transport via lift trucks or pallet jacks. The base utilizes grate material to eliminate any water puddling to inhibit rust. Cylinders are secured via heavy duty triangular steel restraints to account for any variation of cylinder diameters. The HELIOS is made with 2" steel square material with reinforced welds plates at the corners and has a solid cover for elements protection. All structural welds are visible for safety meeting the ten year exemption.



## **Helios Series Cradle System Features**

- Perimeter frame design with all structural welds visible meeting the ten year exemption requirements
- Heavy duty triangular steel cylinder restraints for securing various unmatched cylinders
- Durable Hot dipped galvanized is standard for years of service life. Special order powder coat available upon request.
- All cylinders are secure during set-up
- Easy-access lift truck pockets from two sides
- Fully adjustable sliding manifold brackets makes manifold mounting convenient
- Solid cover for elements protection
- Medusa brass pipe, stainless steel pipe and specialty gas manifolds are available.




ALL PRORACK CRADLES AND PALLETS ARE Engineered to exceed asme bth-1 Calculations and verified and stamped By third party engineering firm

12 Pack Design Capacity 3200 lbs 2 to 1 Safety Factor

Helios Cradle	Ordering Chart					
#	55	w	H	D	lbs	
AG-12A	12 Pack Helios, Powder Coat	42"	31"	75.5"	325 lbs	
AG-12AG	12 Pack Helios, Hot Dipped Galvanized	42"	31"	75.5"	325 lbs	





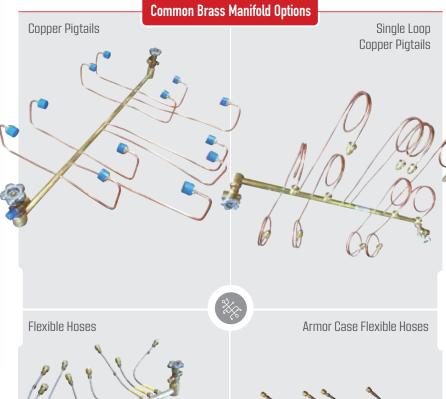



Part Number 12 Pack Helios, Hot dipped galvanized, Brass AG12AG-932 -XXXINRPV manifold with single loop copper pigtails

## **Helios Ordering Information**

Hot Dipped Galvanized Helios Cradle and Manifold System					
Part Number	Cylinder	Pigtail Configuration	Wheel System		
#	0	<b>&amp;</b>	<b>©</b>		
AG12AG-912-XXXIN	12	Copper	Fork Lift		
AG12AG-922-XXXIN	12	Field Replaceable Copper	Fork Lift		
AG12AG-932-XXXIN	12	3000PSI Flexible Hoses	Fork Lift		
AG12AG-932-XXXINPS	12	3600PSI Post Sintered Flexible Hoses	Fork Lift		
AG12AG-932-XXXINARPV	12	3600PSI Post Sintered Armor Cased Hoses	Fork Lift		

See pages 29-40 for complete manifold specifications