



ParadigmLED



PL-PS-M300-DIM-24

24VDC 288W DIMMABLE CLASS 2 MULTI OUTPUT LED DRIVER




ParadigmLED's PL-PS-M300-DIM-24 is a multi-output class 2 LED dimmable LED driver. It is equipped with push-to-reset breakers, one on each output, protecting both the load and the driver. Encased in a high-quality NEMA 3R metal case enclosure, that includes 5 knock-outs to enable easy installation. The PL-PS-M300-DIM-24 is dimmable with any standard MLV TRIAC dimmer.

QUICK SPECS

| Input Voltage | Max Output Power | Output Voltage | Output Current | Efficiency @ Max Load | Power Factor @ Max. Load | Envir. Protection Rating | Weight |
|---------------|------------------|----------------|----------------|-----------------------|--------------------------|--------------------------|---------|
| 120VAC | 96W x 3 | 24VDC | 4 A per port | 80% | > 0.9 | NEMA 3R | 15 lbs. |

WIRING DIAGRAM

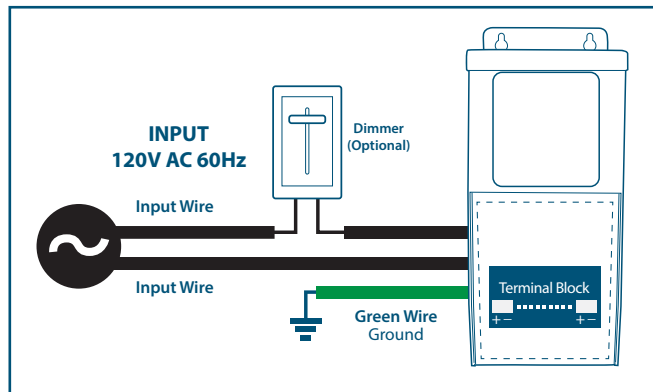

FEATURES

- Class 2
- Wiring compartment with 5 knock-outs for clean and easy installation.
- Dimmable with any standard MLV TRIAC dimmer
- Push-to-reset circuit breakers
- Commercial and Residential Use
- ETL Listed
- Certified to CSA Standard
- Nema 3R Enclosure

ENCLOSURE DETAILS In. (mm)

| | |
|--------|---------------|
| Length | 11.33 (287.9) |
| Width | 4.73 (120.2) |
| Height | 4.26 (108.2) |