

Universal Remote Display

Part Number: RD7CTS-485



Description

PROTEUS[®] Mini-Me[™] is a color graphic display providing Automatic Tank Gauge (ATG) users the freedom to gain access to current tank gauging, leak detection and alarm status from PROTEUS-K or PROTEUS-X consoles.

Automatic Tank Gauges monitor storage vessels for level, temperature, volume and potential leaks. Typically, ATG's are located where audio visual alarms and level information are not conveniently accessible due to installation constraints. These tank gauges are often difficult to use and understand. They are installed in locations that are out of the operator's normal work area therefore rendering potential alarms unnoticed.

PROTEUS[®] Mini-Me[™] allows the user to easily and intuitively gain access to these alarms and level information anywhere throughout a facility. It provides both wired and wireless access to industry standard ATG's providing easily accessible information where required.

Features

- 7 inch color touch screen graphic display
- Ability to view leak sensor alarms and tank inventory remotely
- Audible and visual alarms
- Easy to install
- Easy to use
- Wall mount or flush mount
- Allows freedom to locate main ATG in a convenient/economical location
- Wide viewing angle




Universal Remote Display

Part No. RD7CTS-485


Specifications

Input Power:	100-240 VAC +/- 10%
	50/60 Hz 25 watts
	(12VDC power available upon request)
Input Signal:	RS-485
Distance to Console:	Up to 3000 feet
Audio Visual Controls	
Display:	Color 7 inch graphic display with touch screen
Audible alarm:	85 dB piezoelectric horn
System status:	3 LED's (OK, Warning, Alarm)
Operating Temperature:	20 to 140 degrees F (-7 to 60 C)
Accessories:	
RD-PCK	Power cord kit
ENC-4X-RD7	NEMA 4X enclosure
HTR-1	Heater for NEMA 4X enclosure
TEM-CS	Thermostat for NEMA 4X enclosure
DB-485	RS-485 board (required on PROTEUS-K console)
Weight:	5 lbs.
Dimensions:	(h) 7.63" (w) 8.08" (d) 3.20"
Compatible Consoles:	PROTEUS-K (OEL8000IIK) or PROTEUS-X (OEL8000III)


Specifications subject to change without notice, verify with manufacturer.

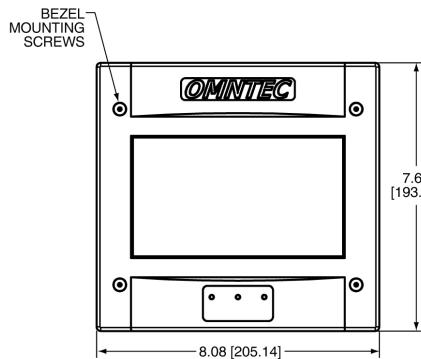


FRONT VIEW




SIDE VIEW

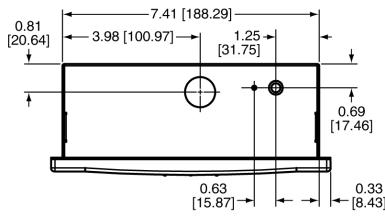







TOP VIEW

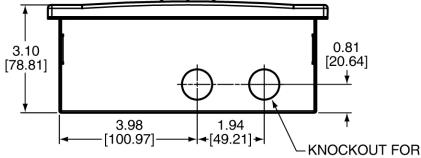

BOTTOM VIEW

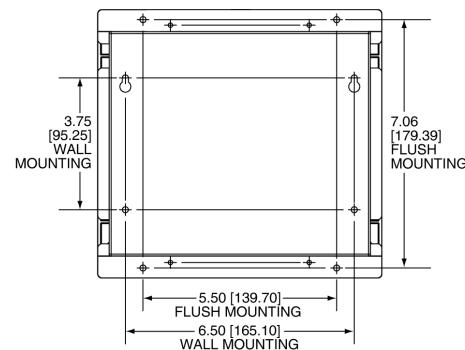

MOUNTING DIMENSIONS

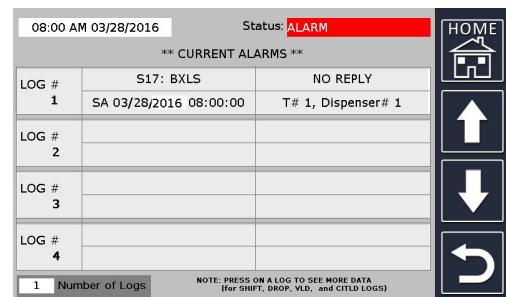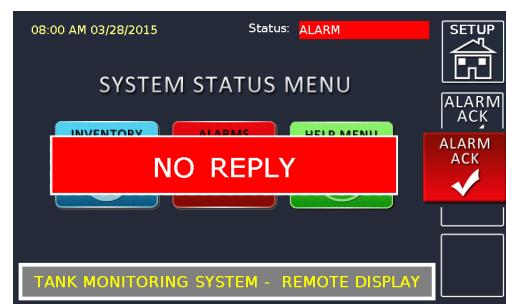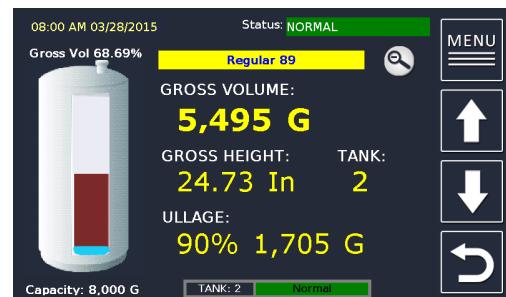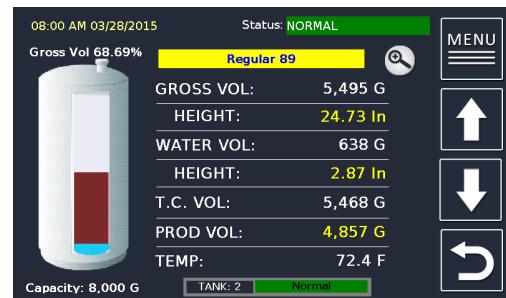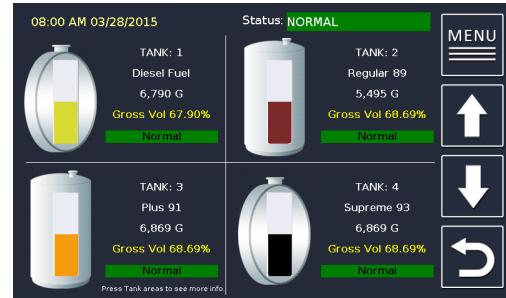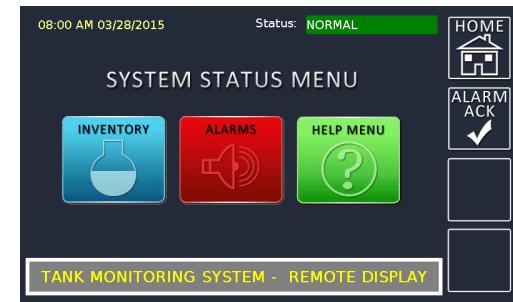

1993 Pond Road
Ronkonkoma, NY 11779
Phone: (631) 981-2001
Fax: (631) 981-2007
E-mail: omntec@omntec.com
Website: www.omntec.com
Document No. DS00078 rev1945.doc
Rev Date: 11-5-2019