


PŘÍDAVNÝ SVĚTLOMET

ADDITIONAL HEADLIGHT

**DL 06.0**

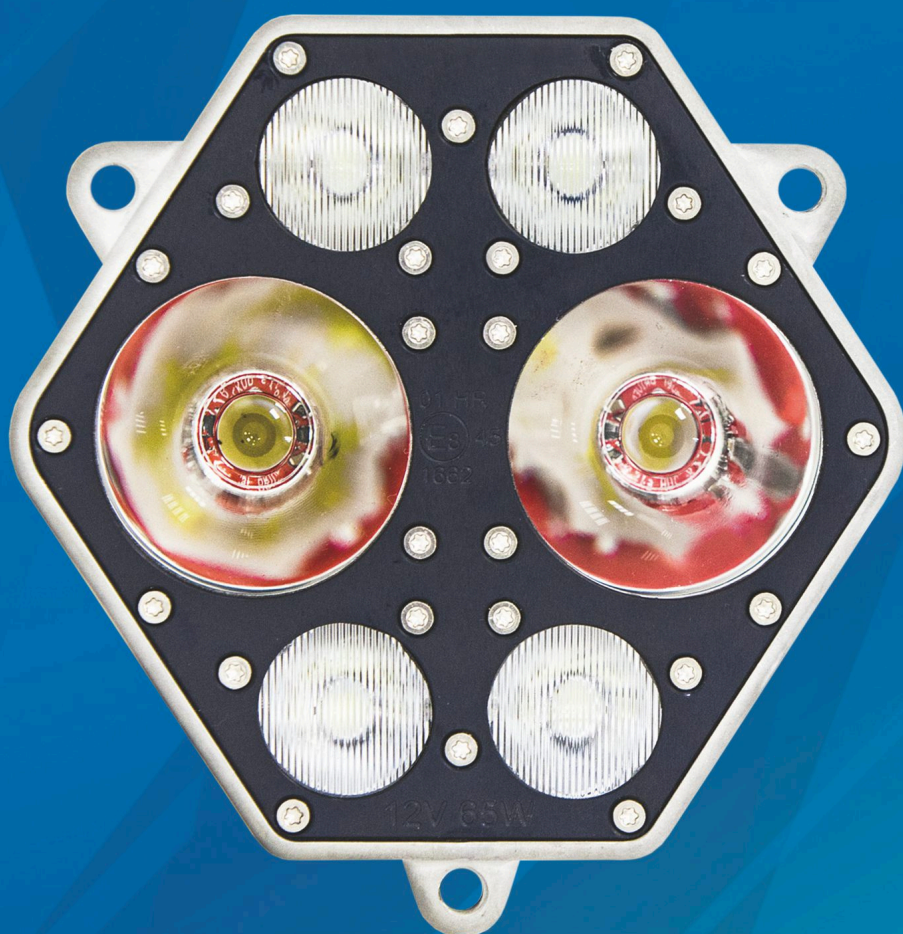

# Přídavný světlomet / Additional headlight DL 06.0

## Vývoj a produkce pro Škoda Motorsport - Fabia R5 WRC2

## Development and production for Škoda Motorsport - Fabia R5 WRC2

### Technické parametry

- 2 hlavní TIR kolimátory s úzkou (bodovou) světelnou mapou
- 4 vedlejší TIR kolimátory s eliptickou světelnou mapou
- Frézované hliníkové tělo sloužící zároveň jako chladič
- Homologováno pro provoz na pozemních komunikacích (EHK112)
- Vodotěsné

### Elektrické parametry


- Jmenovité napětí: 12 - 14,5 V DC
- Jmenovitý proud: 5 A (při 13 V)
- Příkon: 65 W
- Tepelná ochrana
- Ochrana proti přepólování
- Světelný tok: 5.400 lm
- Odstín světla: bílá 6200 K
- Rozměry: š 142 x v 145 x h 45 mm
- Hmotnost: 598 g

### Technical parameters

- 2 main TIR lens with narrow (point) light map
- 4 secondary TIR lens with elliptical light map
- Milled ALU body used also as cooler
- Homologated for traffic use (EHK112)
- Water resistant

### Electrical parameters

- Nominal voltage: 12 - 14,5 V DC
- Nominal current: 5 A (by 13 V)
- Power: 65 W
- Overheating protection
- Misapply protection
- Light flux: 5.400 lm
- Light temperature: white 6200 K
- Dimensions: w 142 x h 145 x d 45 mm
- Weight: 598 g

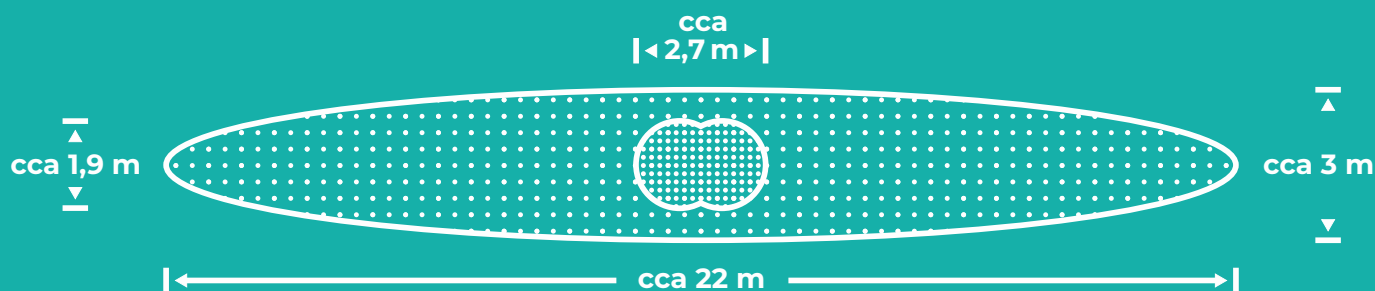

Světelná mapa ve vzdálenosti 25 m od světla / Light map - 25m distance

