


Designed for dedicated home cinemas with an acoustically transparent screen

Minimum screen size 16:9 95" (2103 x 1183mm)
Minimum screen size 21:9 100" (2335 x 1001mm)

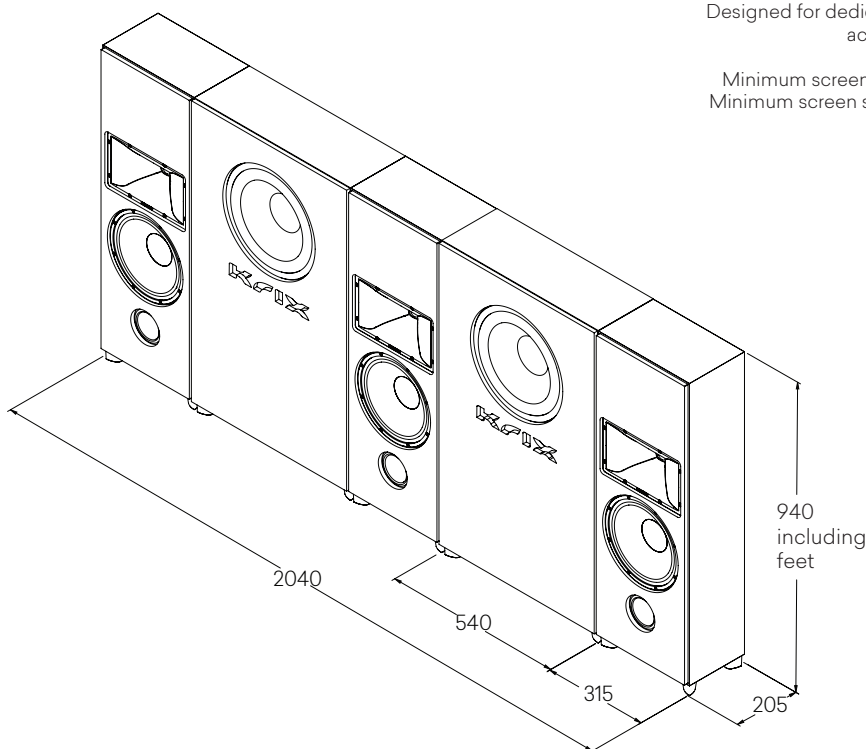

MX-10 LCR	
Frequency Range	40 Hz - 20 kHz
Power Handling	100 - 500 Watts RMS recommended amplifier power
Sensitivity	97 dB (2.83V / 1m)
Impedance	8 Ohms
Configuration	2-Way
Low Frequency Driver	Single 255mm (10") paper cone driver. 50mm (2") voice coil wound on high powered kapton former, with ventilated magnet assembly and copper shorting ring for low distortion
High Frequency Driver	26mm (1") doped fabric dome with large roll surround. Ferro fluid cooled. Coupled to a Krix designed 90 x 40 short throw waveguide
Weight	15kg each
MX-10 Subwoofer	
Frequency Range	25 Hz - 200 Hz
Power Handling	200 - 600 Watts RMS recommended amplifier power
Rec. processing	High pass filter: 30Hz 24dB / Octave Butterworth. Limiter: 500W (4 Ohms)
Sensitivity	92 dB (2.83V / 1m)
Impedance	4 Ohms
Configuration	Bass reflex, down firing vents
Low Frequency Driver	Nominal 305mm (12") diameter paper cone driver with 50mm (2") long throw voice coil developed for high level, low frequency reinforcement
Weight	26kg each