

B.

Portland

Because we believe in the beauty of wood without the cost to nature or your pocket, Belgotex has launched a highly durable vinyl plank with an ultra-realistic wood-look. Portland features a natural wood grain texture in straight, curly, or wavy grain patterns, and even the occasional bank-sawn effect, which adds warmth, depth, and authenticity.


Extended Specifications

Use Classification:	Heavy Residential
Type of Installation:	Dry Back (Stick Down)
Overall Thickness:	2mm
Wear Layer Thickness:	0.3mm
Plank Size:	1516.9mm x 228.6mm (l x w)
SQM Per Box:	4.16sqm
Quantity of Planks Per Box:	12
VOC Tested:	Passed
Certification:	Global GreenTag
Quantity Per Box:	3.16m2
Number of planks:	12 planks per box
Stain & Chemical Resistance:	YES (EN 26987)

Fire Index:	Bfl-s1 (EN13501)
Slip Resistance:	DS-R10 (DIN 51130)
Residual Indentation:	< 0.1mm (EN 24343-1)
Thermal Conductivity:	0.074 (W/m*K) *(EN 12664)
Thermal Resistance:	0.028 (m2K) / W (EN 12664)
Electrostatic Behaviour:	0.1 kV (EN 1815 Method A)
Dimensional Stability:	≤0.25% (EN ISO 2399)
Colour Fastness:	> 6 Grade (ISO 105-B02)
Sound Absorption:	Approx. 3dB (EN 10140)
Castor Chair:	Yes, Type W (EN ISO 4918) (Use soft non-staining wheels)



B.

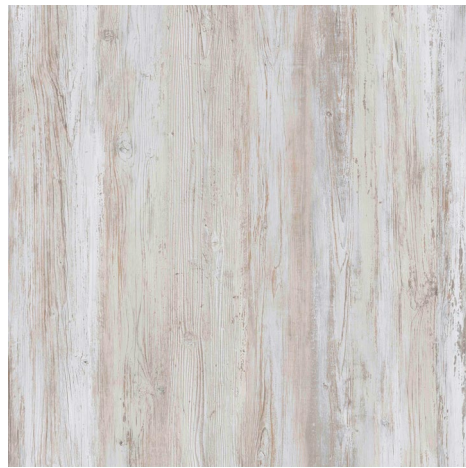

Bark



Bole



Bough



Fell



Gnarl



Knot



Mill



Stump

Portland



Underfloor Heating



Heavy Residential



Light Commercial



Suitable for Staircases



GREEN TAG CERTIFIED
trust brands®





15 YEAR RESIDENTIAL WARRANTY



7 YEAR COMMERCIAL WARRANTY



100% WATERPROOF



floor score
CERTIFIED BY SCS Global Services



SABS
ISO 9001



SABS
ISO 14001



SABS
ISO 45001

Bill of Quantities

- Belgotex Portland 2mm heavy residential dry back stick down LVT.
- 1516.9mm x 228.6mm (l x w) with 0.3 mm wear layer.
- 15-year residential warranty and 7-year commercial warranty.
- This product is to be laid in accordance with SANS 10070 fitting code of practice.
- Belgotex recommends the use of a 60mm unhooded soft castor, with a 23mm or 38mm diameter, designed for a 60kg loading capacity per a castor. Recommended material is high impact nylon core and hub with soft grey/black PU treads on the wheel.
- Green tag level A Gold rated certification.

*All product names and logos are trademarks of BELGOTEX FLOORCOVERINGS® (Pty) Ltd. © BELGOTEX FLOORCOVERINGS® (Pty) Ltd. All rights reserved. Warranty and guarantee to limitations and conditions. For details contact BELGOTEX FLOORCOVERINGS® (Pty) Ltd.